





Ø: 2.55" (6.5 cm)



L/W: 2.55" (6.5 cm)



CODE:

BO-B2CAR0158-IN

LIGHT SOURCE:

1 × 3W

LENS:

B73

SELECTED DEGREE:

30°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA

CONSUMPTION:

5.4 W

LUMINANCE:

CW=305 WW=267

CODE:

BO-B2CAS0158-IN

LIGHT SOURCE:

1 × 3W

LENS:

B73

SELECTED DEGREE:

30°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA


CONSUMPTION:

5.4 W

LUMINANCE:

CW=305 WW=267

WATER PROOF SOLUTION

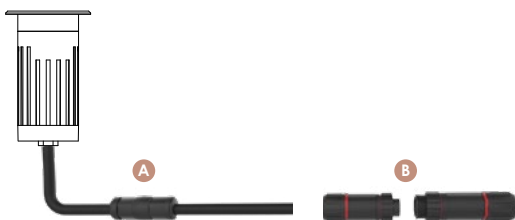



- A Water-Stopper**(included)
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- IP67 Jiffy quick plug/socket connector**(Option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646





991 South Gull Lake Dr
Richland, MI 49083
USA

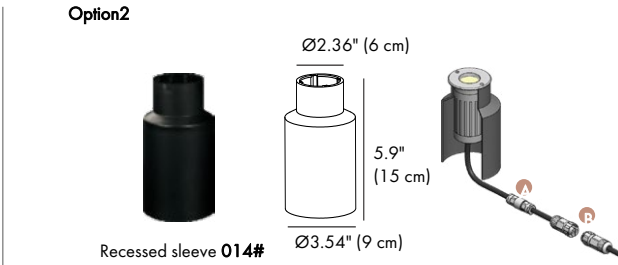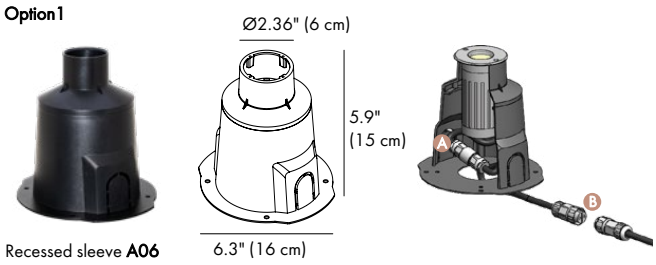SLEEVE (Included)




LIGHTING INFORMATION


FRONT COVER	316# stainless steel forged molding with hard chromeplated
HOUSING	1070# grey powder coated aluminum forged molding T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered step glass.T=5mm
GASKET	Silicon rubber molding shaped seal
POWER CABLE	Outside of luminaire 110-0277V; H05RN-F 3×1.0mm ² , L=0.5m
CABLE GLAND	IP67 Copper and nicked coated
LED TYPE	Nichia
LED DRIVER	Constant Voltage Input, Constant Current Output
LENS	OPTICS Reflector efficiency≥90%
RECESSED SLEEVE MATERIAL	PC/ABS ALLOYS
GLASS PRESSURE CAPACITY	Full area=783kgs
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized
IP	IP67
IK	08
OPERATING TEMPERATURE	-20°C~40°C

OPTICS	Referenced Degree(°)θ1/2					
	B33	9°	15°	20°	45°	60°
	B73	30°				

HONEYCOMB LOUVER (Option)

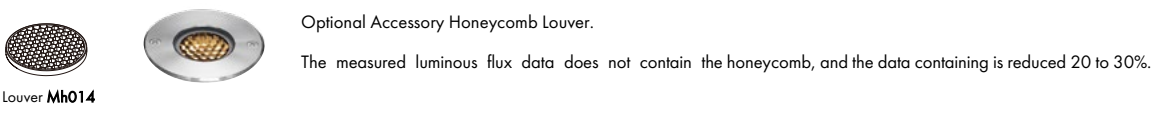

PHOTOMETRIC

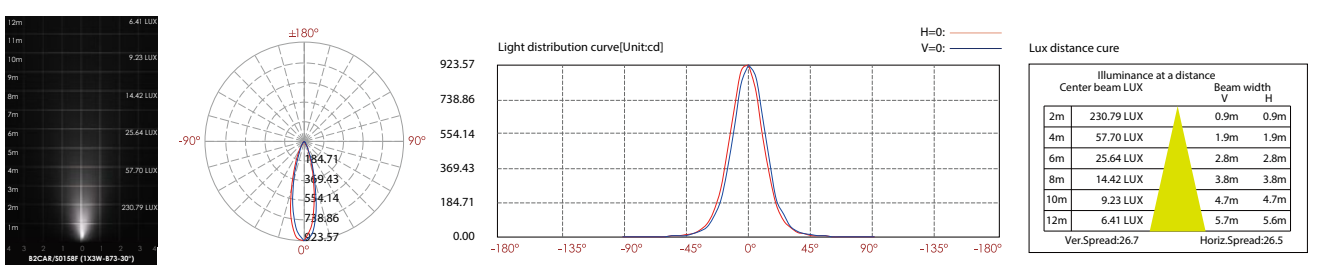

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.