






Ø: 5.1" (13 cm)



Ø: 6.3" (16 cm)

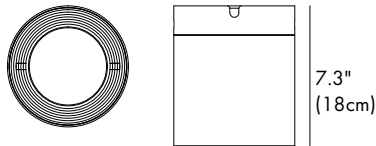

Ø: 7.9" (20 cm)

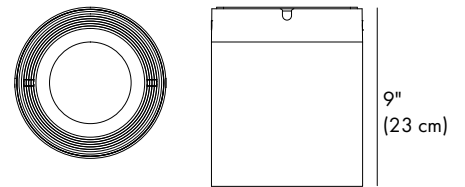

**CODE:**

BO-B8CJ0170-CL

**LIGHT SOURCE:**

1 × 1 8W

**LENS / SELECTED DEGREE(°)**

B66 / 55°

**INPUT VOLTAGE:**

110-277V

**OPERATING CURRENT:**

91 mA

**CONSUMPTION:**

21W

**LUMINANCE:**

2205 lm

**IK:**

06

**CODE:**

BO-B8EK0174-CL

**LIGHT SOURCE:**

1 × 30W

**LENS / SELECTED DEGREE(°)**

B57 / 60°

**INPUT VOLTAGE:**

110-277V

**OPERATING CURRENT:**

151 mA

**CONSUMPTION:**

34W

**LUMINANCE:**

2851 lm

**IK:**

06

**CODE:**

BO-B8ER0178-CL

**LIGHT SOURCE:**

1 × 48W

**LENS / SELECTED DEGREE(°)**

B57 / 60°

**INPUT VOLTAGE:**

110-277V

**OPERATING CURRENT:**

216 mA

**CONSUMPTION:**

50W

**LUMINANCE:**

4482 lm

**IK:**

06



sales@gordonbullarda.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA



**LIGHTING INFORMATION**

<b>HOUSING MATERIAL</b>	Extruded aluminum alloy #6063
<b>PAINTING</b>	Powder coating, T= 60~80 μm. Adhesion of ISO class 1/ASTM class 4B
<b>REFLECTOR</b>	OPTICS reflector. efficiency≥85%
<b>LED</b>	NICHIA
<b>POWER CABLE</b>	Outside of luminaire H05RN-F 3×1.0mm <sup>2</sup> , L=0.3m(110-277V)
<b>OPERATING TEMPERATURE</b>	-20°C~40°C

**REGULAR PAINTING COLOR**


<b>Basic</b>	<b>Secondary</b>
 Dark Grey <b>KAP 7037</b>	 Sanded Black <b>RAL 9005</b>  Sanded White <b>RAL 9003</b>

**OPTICS**

	<b>B66</b>	<b>15°</b>	<b>20°</b>	<b>25°</b>	<b>38°</b>	<b>55°</b>
	<b>B57</b>	<b>15°</b>	<b>25°</b>	<b>36°</b>	<b>60°</b>	

**ACCESSORIES**

**HONEYCOMB LOUVER**




I/D Fitted Item

<b>Mh074</b>	BO-B8CJ0170-CL
<b>Mh072</b>	BO-R8EKU0174-CL
<b>Mh066</b>	BO-B8ERU0178-CL



**PHOTOMETRIC**

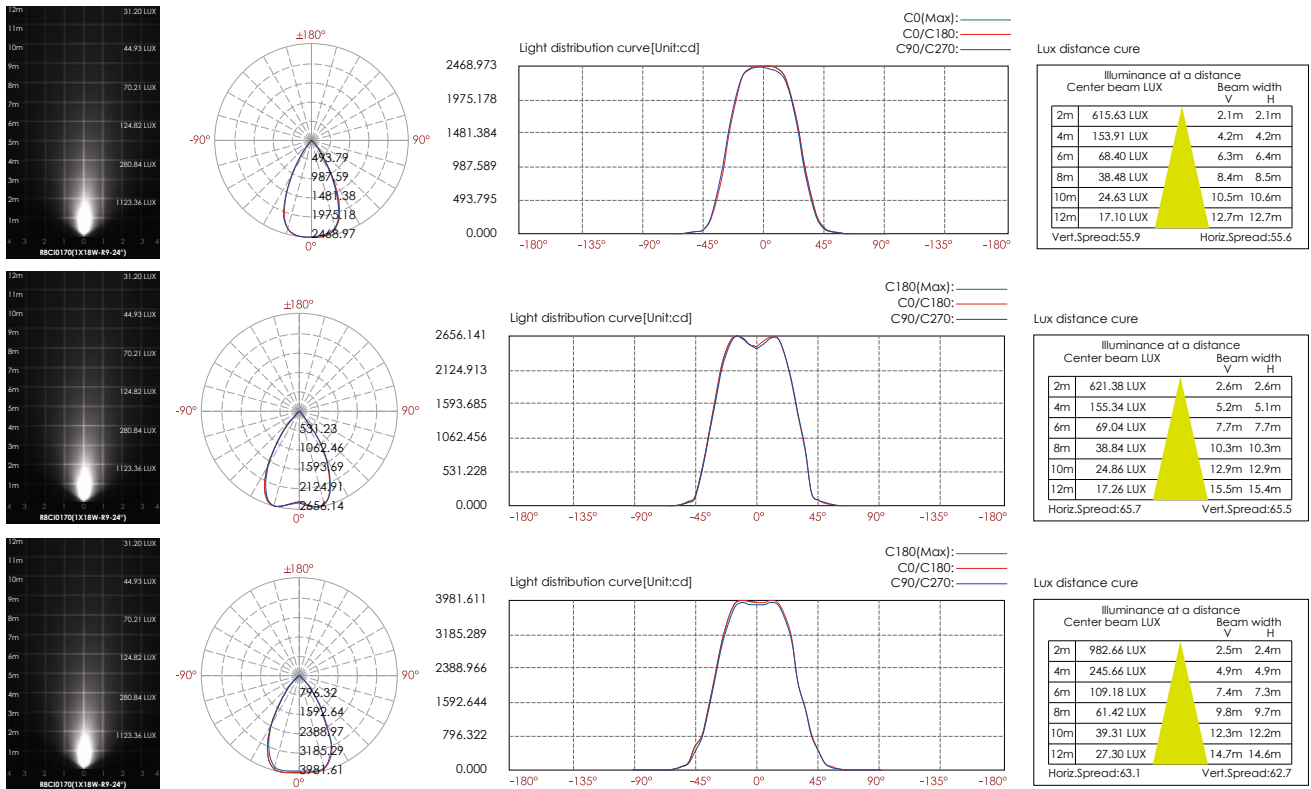

sales@gordonbullarda.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA