

CODE:

BB-B3TMS0158-SP

LIGHT SOURCE:

1×3W NICHIA

LENS:

B33

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA

CONSUMPTION:

5.4 W

LUMINANCE:

CW = 305 lm
WW = 274 lm

CODE:

BB-B3TNS0126-SP

LIGHT SOURCE:

1×6W NICHIA

LENS:

B51

SELECTED DEGREE:

28°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

385 mA

CONSUMPTION:

6.8 W

LUMINANCE:

CW = 740 lm
WW = 667 lm

CODE:

BB-B3TOS0128-SP

LIGHT SOURCE:

1×10W NICHIA

LENS:

B52

SELECTED DEGREE:

24°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:


570 mA

CONSUMPTION:

12.3 W

LUMINANCE:

CW = 1200 lm
WW = 1315 lm

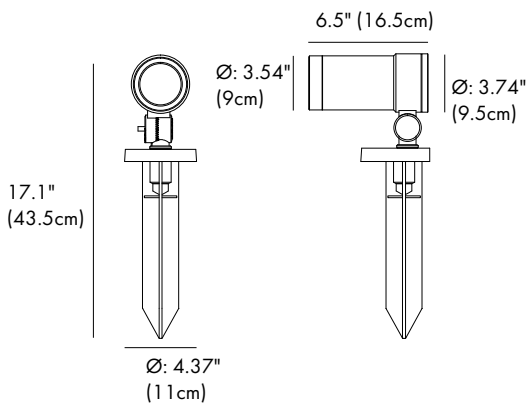

CODE:

BB-B3TPSO171-SP

LIGHT SOURCE:

1×20 W NICHIA

LENS:

B66

SELECTED DEGREE:

25°

INPUT VOLTAGE:

110-277 V

OPERATING CURRENT:

93 mA

CONSUMPTION:

25.8 W

LUMINANCE:

CW=2200

WW=2071

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

ACCESSORIES(Optional)


**SPIKE
STAINLESS STEEL**

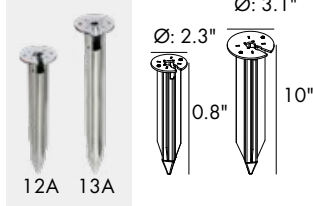

I'D	Fitted Item
12A	B3TMS0158 B3TNS0126 B3TOS0128
13	B3TPS0171




PC/ABS alloys

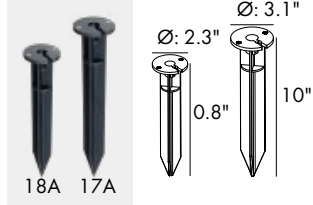

I'D	Fitted Item
18A	B3TMS0158 B3TNS0126 B3TOS0128
17A	B3TPS0171




TREE POLE STRAP

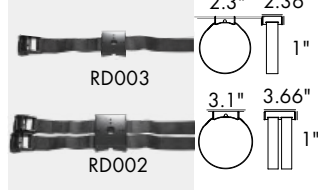

A	I'D	Fitted Item
RD003	B3TMS0158 B3TNS0126 B3TOS0128	
RD002	B3TPS0171	



BEVEL CUT HOOD

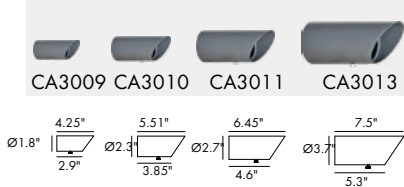


I'D	Fitted Item
CA3009	B3TMS0158
CA3010	B3TNS0126
CA3011	B3TOS0128
CA3013	B3TPS0171




HONEYCOMB LOUVER



I'D	Fitted Item
Mh024	B3TMS0158
Mh025	B3TNS0126
Mh026	B3TOS0128
Mh027	B3TPS0171



WATER PROOF SOLUTION

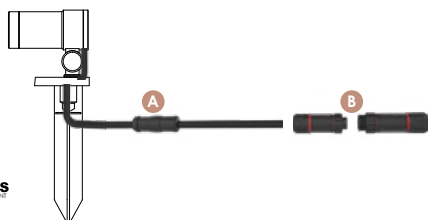

- A Water-Stopper(Included)**
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA





HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT	Tempered glass. T=4mm
GASKET	Tooling shaped seal
LED	Nichia
LED	Constant Voltage Input, Constant Current Output
LENS	OPTICS lens, efficiency ≥ 85%
OPERATING TEMPERATURE	-20 C ~ 40 C
POWER	Outside of luminaire 11-277V: H05RN-F 3×1.0mm ² , L=2.0m

REGULAR PAINTING COLOR




Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

OPTICS

Referenced Degree(°)θ1/2

	B33	9°	15°	20°	45°	60°
	B52	20°	36°			
	B66	15°	25°	38°		
	B51	20°	28°	36°	60°	




PHOTOMETRIC (Non Antiglare louver)

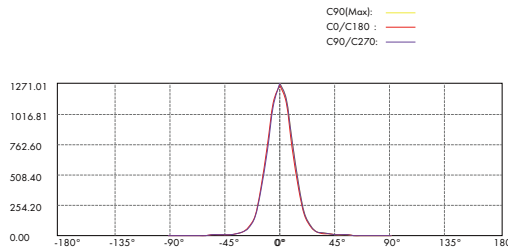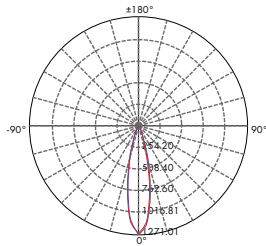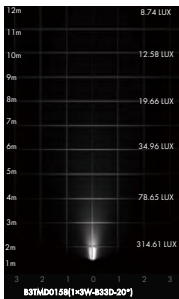

Lux distance Curve

Center Beam LUX	Beam Width	
	V	H
2m	0.8m	0.8m
4m	1.6m	1.6m
6m	2.5m	2.5m
8m	3.3m	3.3m
10m	4.1m	4.1m
12m	4.9m	4.9m




Vert. Spread: 23.3 Horiz. Spread: 23.2

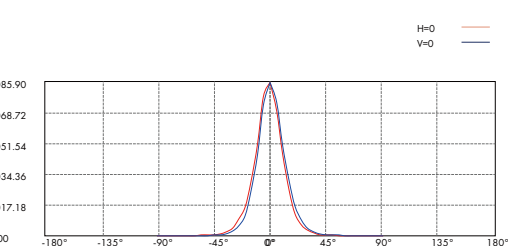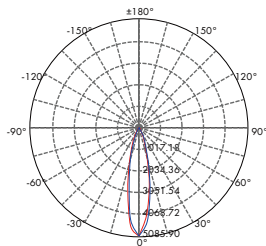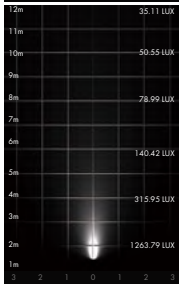

Lux distance Curve

Center Beam LUX	Beam Width	
	V	H
2m	0.8m	0.8m
4m	1.6m	1.6m
6m	2.4m	2.4m
8m	3.2m	3.2m
10m	4.0m	4.0m
12m	4.8m	4.8m




Vert. Spread: 22.8 Horiz. Spread: 22.6

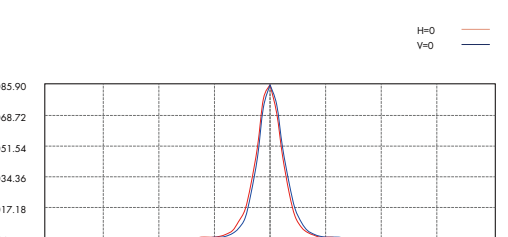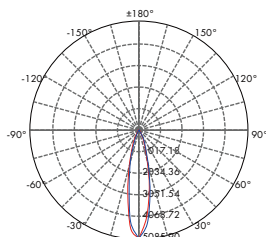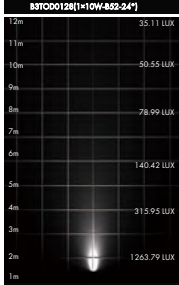

Lux distance Curve

Center Beam LUX	Beam Width	
	V	H
2m	0.8m	0.8m
4m	1.6m	1.6m
6m	2.4m	2.4m
8m	3.2m	3.2m
10m	4.0m	4.0m
12m	4.8m	4.8m

Vert. Spread: 22.8 Horiz. Spread: 22.6

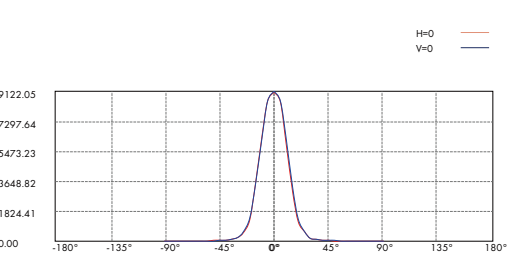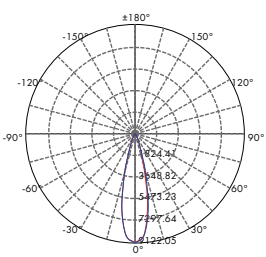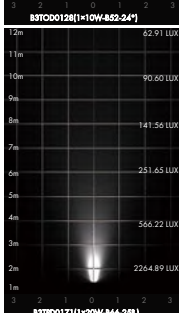

Lux distance Curve

Center Beam LUX	Beam Width	
	V	H
2m	0.9m	0.9m
4m	1.8m	1.8m
6m	2.7m	2.8m
8m	3.6m	3.7m
10m	4.5m	4.6m
12m	5.4m	5.5m

Vert. Spread: 25.5 Horiz. Spread: 25.8

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA