

CODE:

BO-B3EKA0359-SP

LIGHT SOURCE / LENS:

3×3.5W / FB12B5

SELECTED DEGREE:

45°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

58 mA

CONSUMPTION:


13.2W

LUMINANCE:

705 lm

IK:

06

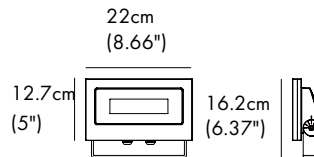

CODE:

BO-B3FKA0559-SP

LIGHT SOURCE / LENS:

5×3.5W / FB11B4, FB12B5

SELECTED DEGREE:

45°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

94mA

CONSUMPTION:


21.7W

LUMINANCE:

1324 lm

IK:

06

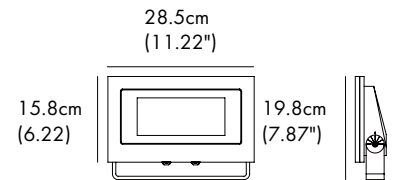

CODE:

BO-B3GKA1259-SP

LIGHT SOURCE / LENS:

12×3W / FB12B5

SELECTED DEGREE:

45°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

169 mA

CONSUMPTION:

39W

LUMINANCE:

2940lm

IK:



06

TRIAC PWM 1-10V DALI IP66 OUTDOOR RATED 

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

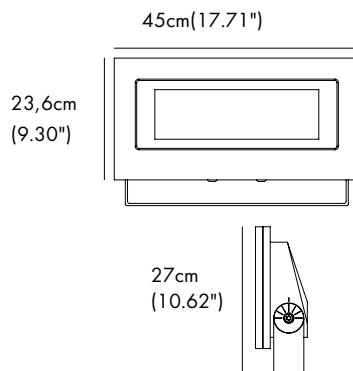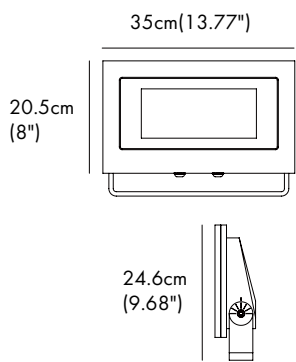

CODE:

BO-B3HKA2158-SP

LIGHT SOURCE / LENS:

21×3W / FB11B4, FB12B5

SELECTED DEGREE:

45°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

253 mA

CONSUMPTION:

58.8W

LUMINANCE:

4787lm

IK:

06

CODE:

BO-B3IKA3058-SP

LIGHT SOURCE / LENS:

30×2.8W / FB11B4, FB12B5

SELECTED DEGREE:

45°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

383mA

CONSUMPTION:

86.3W

LUMINANCE:

6053 lm

IK:

06

TRIAC PWM 1-10V DALI IP66 OUTDOOR RATED RoHS COMPLIANT

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

WATER PROOF SOLUTION



- A Water-Stopper(Included)**
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered glass.T=3mm
LED	NICHIA
LED DRIVER	Constant Voltage Input, Constant Current Output IP68 PG-9
CABLE GLAND	PA66
GASKET	Tooling shaped seal
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=2.0m



DIMMING SUPPORT Triac PWM Available
1-10V Dali Customized
B3GKA1259, B3HKA2158, B3IKA3058

REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

OPTICS

Referenced Degree(°)1/2

	FB11B4	9°	15°	20°	30°	45°	60°
	FB12B5	9°	15°	20°	30°	45°	60°

FEATURE



















Gear: The gear between the luminaire housing and the U bracket to prevent sliding.

OVERVIEW



PHOTOMETRIC

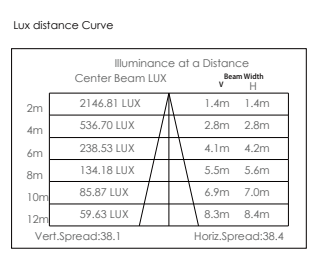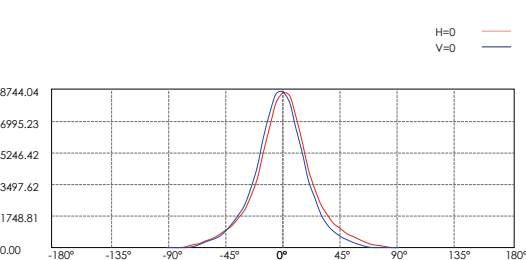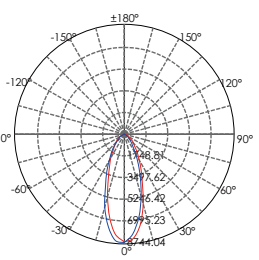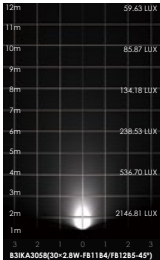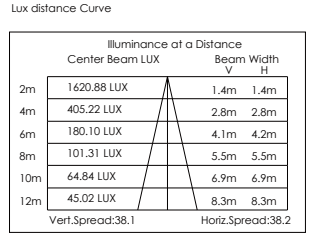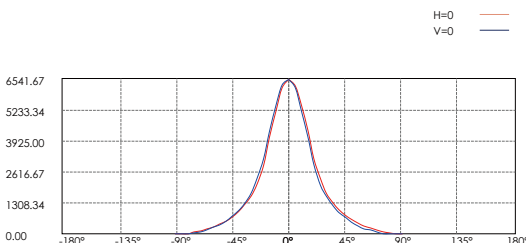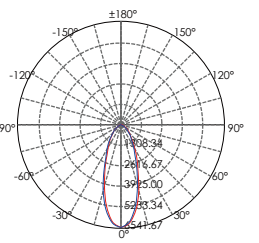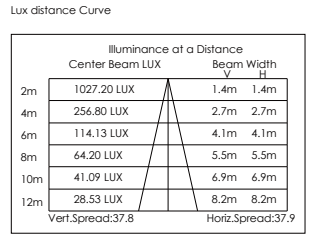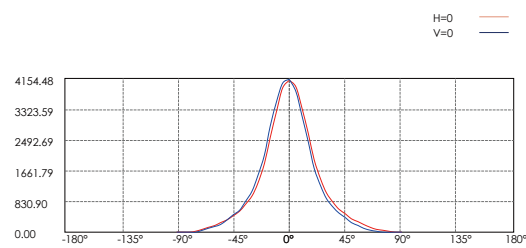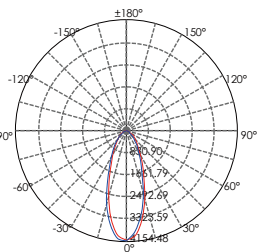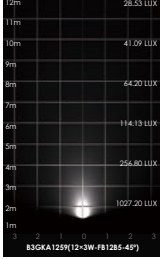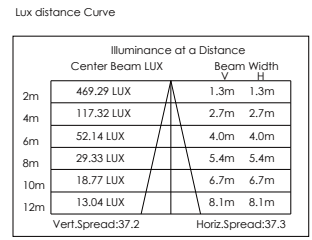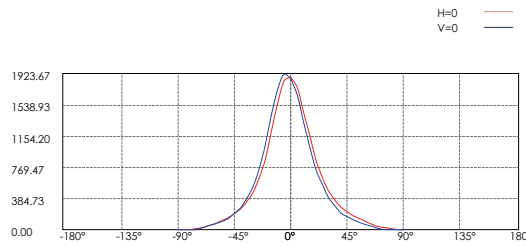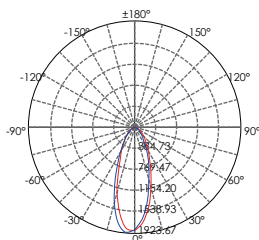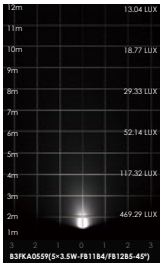

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA