

ITEM	HEIGHT	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BB-D9AHL2434A-B	30cm(11.81")	24x0.2W NICHIA	110-277V	50	6.1	300	07
BB-D9AHM2434A-B	55cm(21.65")						
BB-D9AHH2434A-B	80cm(31.49")						

**HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#  
Die-casting powder coated aluminum.

**LIGHT WINDOW** PMMA

**LED** SMD3030

**LED DRIVER** Constant Voltage Input, Constant Current Output

**OPERATING TEMPERATURE** -20 °C~40 °C

**POWER CABLE** Outside of luminaire  
110-277V; H05RN-F 3x1.0mm<sup>2</sup>, L=0.5m

**BASE** Flange base

**DIMMING SUPPORT** Triac PWM Available  
1-10V Dali Customized

**Modular Light Source and Power with IP-66**



- 1 IP66 light source module pc cover IP66
- 2 built-in power module
- 3 IP67 cable gland


**REGULAR PAINTING COLOR**

**Basic** Sanded Black RAL 9005


**Secondary** Dark Grey KAP 7037

Light Sanded Grey RAL 7038

**INSTALLATION BASE**

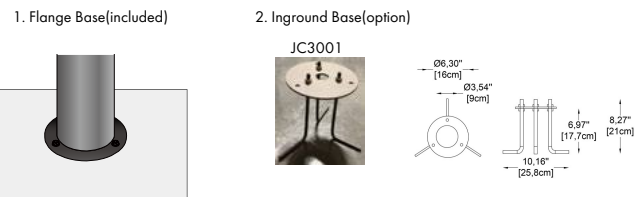

**PHOTOMETRIC**

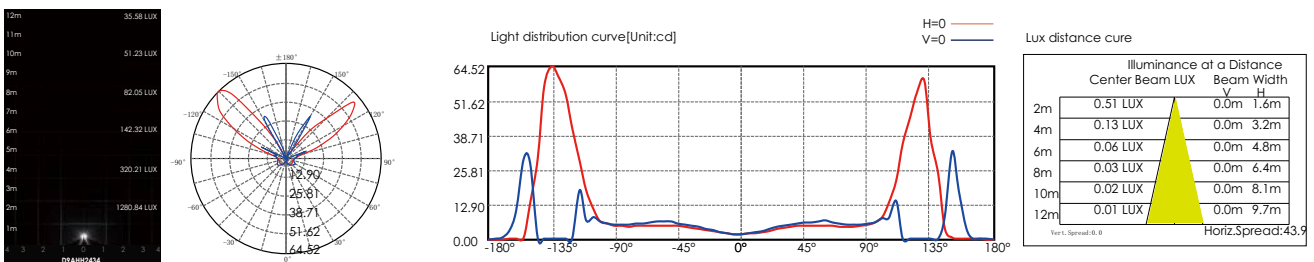

991 South Gull Lake Dr  
Richland, MI 49083  
USA

1-877-964-4646