

ITEM	HEIGHT	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)
BB-D9AFL1234-B	30cm(11.81")	12x0.5W OSRAM	110-277V	60	7	168
BB-D9AFM1234-B	55cm(21.65")					
BB-D9AFH1234-B	80cm(31.49")					

HOUSING T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12# Die-casting powder coated aluminum.

LIGHT WINDOW PMMA

LED SMD2835

LED DRIVER Constant Voltage Input, Constant Current Output


OPERATING TEMPERATURE -20°C~40°C

BASE Flange Base

DIMMING SUPPORT 1-10V / Dali / Customized

IP 65

BEAM DEMO

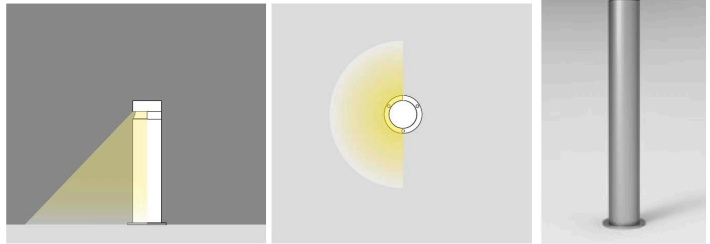


REGULAR PAINTING COLOR

Basic
 Sanded Black RAL 9005



Secondary
 Dark Grey KAP 7037

Light Sanded Grey RAL 7038

INSTALLATION BASE

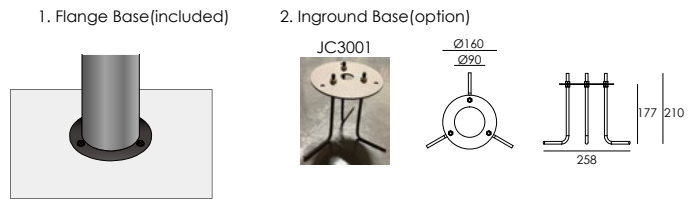

PHOTOMETRIC

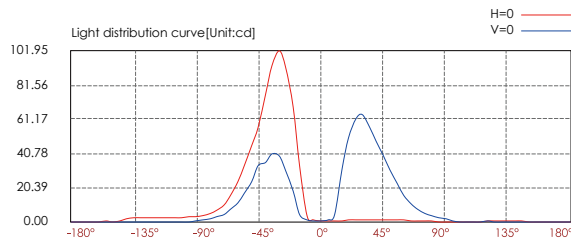

Lux distance curve

Center beam LUX	Beam width V	H
2m 0.16 LUX	1.1m	2.5m
4m 0.04 LUX	2.1m	5.0m
6m 0.02 LUX	3.2m	7.5m
8m 0.01 LUX	4.3m	10.0m
10m 0.01 LUX	5.4m	12.5m
12m 0.00 LUX	6.4m	15.1m

Vert.Spread: 30.0 Horiz.Spread: 64.2

sales@gordonbullard.com
 www.bullardoutdoor.com
 1-877-964-4646



991 South Gull Lake Dr
 Richland, MI 49083
 USA