

ITEM	HEIGHT(cm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BB-B9ANL0166A-B	30cm(11.81")	84x0.1W OSRAM	110-277V	77	7.3	CW-130 WW-150	06
BB-B9ANM0166A-B	55cm(21.65")						
BB-B9ANH0166A-B	80cm(31.49")						

HOUSING T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#
Die-casting powder coated aluminum.

LIGHT WINDOW PMMA

LED SMD4040

LED DRIVER Constant Voltage Input, Constant Current Output


OPERATING TEMPERATURE -20 °C~40 °C

POWER CABLE Outside of luminaire
10-277V: H05RN-F 3x1.0mm², L=0.5m

BASE Flange base

DIMMING SUPPORT Triac PWM Available
1-10V Dali Customized

Modular Light Source and Power with IP-66

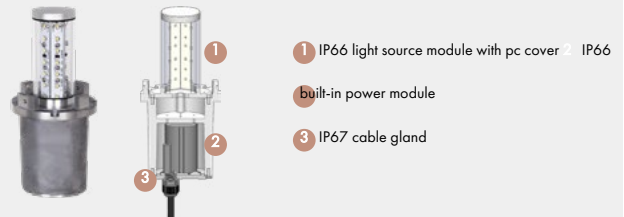


REGULAR PAINTING COLOR

Basic
Sanded Black
RAL 9005


Secondary
Dark Grey
KAP 7037

Light Sanded Grey
RAL 7038

INSTALLATION BASE

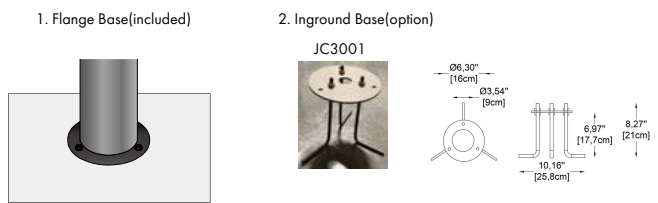

PHOTOMETRIC

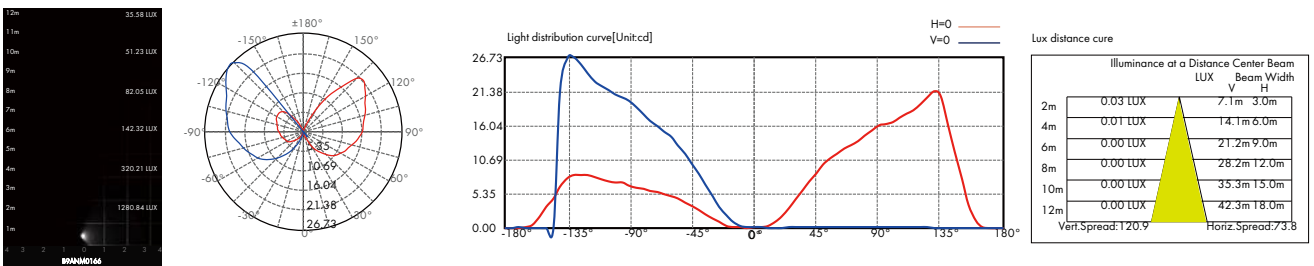

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA