


ITEM	HEIGHT(cm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)
B9AGL0166A	300	1×6W NICHIA	110-277V	77	7.3	183
B9AGM0166A	550					
B9AGH0166A	800					

- HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12# Die-casting powder coated aluminum.
- LIGHT WINDOW** PMMA
- LED** SMD4040
- LED DRIVER** Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** -20°C~40°C
- POWER CABLE** Outside of luminaire
110-277V: H05RN-F 3×1.0mm², L=0.5m
- BASE** Flange base
Triac PWM Available
- DIMMING SUPPORT** 1-10V Dali Customized


BEAM DEMO

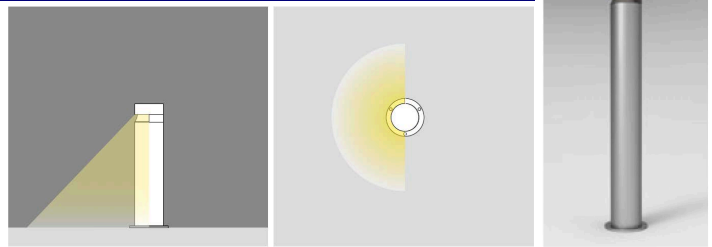

REGULAR PAINTING COLOR

- Basic**
 - Sanded Black RAL 9005
- Secondary**
 - Dark Grey KAP 7037
 - Light Sanded Grey RAL 7038

INSTALLATION BASE

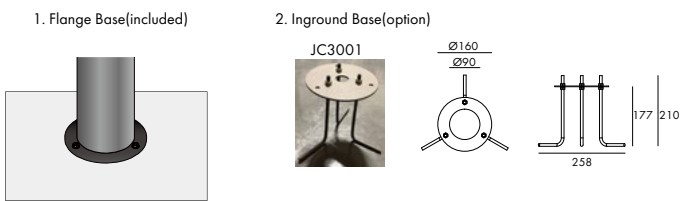

PHOTOMETRIC

