



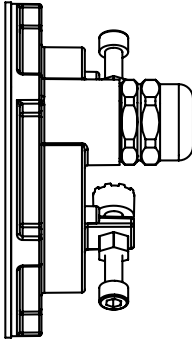

Ø: 4.7" (12 cm)
Ø: 0.62" (1.6 cm)

2.55" (6.5 cm)

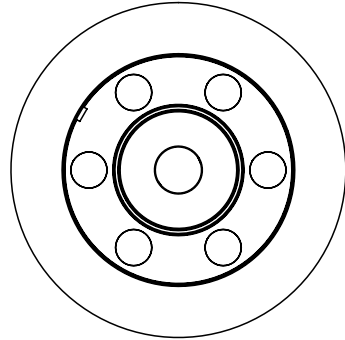

- CODE:**
BO-B4UB0657-UL
- LIGHT SOURCE:**
6 x 1.5W
- LENS:**
B15
- SELECTED DEEGRE**
20°
- INPUT VOLTAGE:**
110-277V
- OPERATING CURRENT:**
500 mA
- CONSUMPTION:**
12W
- LUMINANCE:**
825

- FRONT COVER & HOUSING LIGHT** Hard chromeplated molding shaped stainless steel SUS 316#
- WINDOW** Step tempered glass. T=8mm
- CABLE GLAND** IP68 PG-13.5 copper with nickel-coated
- GASKET** Silicone gasket
- PCB** Excellent heat conductivity aluminum. coefficient of heat Conductivity≥2.0w/mk
- LED DRIVER** Constant Voltage Input, Constant Current Output
- OPERATING TEMPERATURE** Temperature of water between -20°C~40°C less than 1 meter depth
- BUILT-IN OVERHEAT SENSOR SYSTEM** Automatic Shutdown at 75°C
- POWER CABLE OPTIONAL** Outside of luminaire H07RN-F 2×1.0mm² with water-stopper, L=1 m, 3 m, 5 m
- DIMMING SUPPORT** Triac PWM Available: 1-10V / Dali / Customized


OPTICS		Referenced Degree(°)			
	B15	10°	15°	20°	30°

WATER PROOF SOLUTION



- A Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP68 Jiffy quick plug/socket connector(Optional)**
A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

DETAILED VIEW

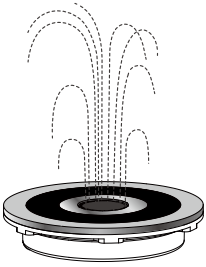




Central Ejective



Water jet pipe G3/4"taper



PHOTOMETRIC

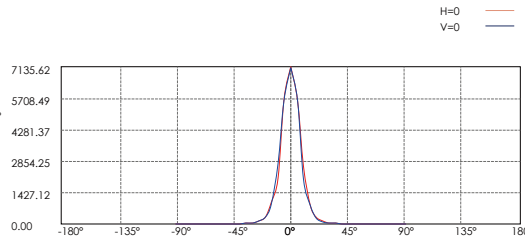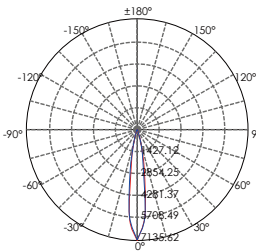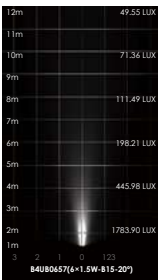

Lux distance Curve

Distance	Illuminance at a Distance	
	Center Beam LUX	Beam Width
2m	1783.90 LUX	0.6m 0.6m
4m	445.98 LUX	1.1m 1.2m
6m	198.21 LUX	1.7m 1.7m
8m	111.49 LUX	2.3m 2.3m
10m	71.36 LUX	2.9m 2.9m
12m	49.55 LUX	3.5m 3.5m

Vert.Spread:16.4H oriz.Spread:14.5



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA