

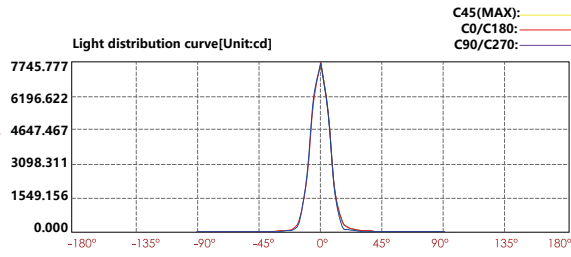



PHOTOMETRIC

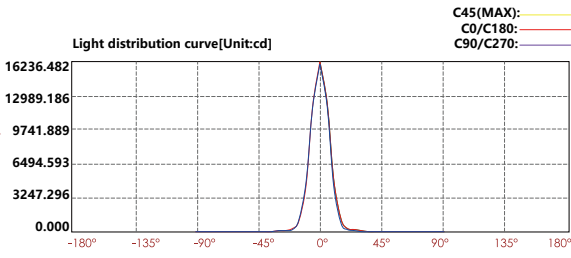



Lux distance cure

	Illuminance at a distance	
	Center beam LUX	Beam width V H
2m	1936.44 LUX	0.5m 0.5m
4m	484.11 LUX	1.1m 1.1m
6m	215.16 LUX	1.6m 1.6m
8m	121.03 LUX	2.2m 2.2m
10m	77.46 LUX	2.7m 2.7m
12m	53.79 LUX	3.3m 3.2m
	Ver.Spread:15.5	Horiz.Spread:15.4



Lux distance cure

	Illuminance at a distance	
	Center beam LUX	Beam width V H
2m	4059.12 LUX	0.5m 0.5m
4m	1014.78 LUX	1.1m 1.1m
6m	451.01 LUX	1.6m 1.6m
8m	253.70 LUX	2.2m 2.2m
10m	162.36 LUX	2.7m 2.7m
12m	112.75 LUX	3.2m 3.3m
	Ver.Spread:15.3	Horiz.Spread:15.5

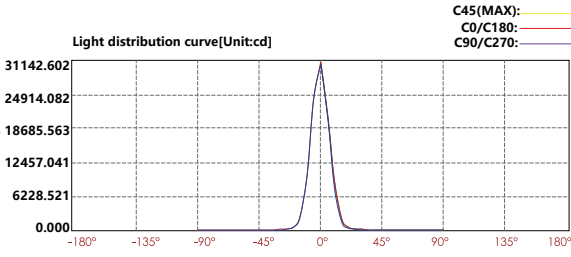

Lux distance cure

	Illuminance at a distance	
	Center beam LUX	Beam width V H
2m	7785.65 LUX	0.5m 0.5m
4m	1946.41 LUX	1.1m 1.1m
6m	865.07 LUX	1.6m 1.6m
8m	486.60 LUX	2.1m 2.2m
10m	311.43 LUX	2.7m 2.7m
12m	216.27 LUX	3.2m 3.3m
	Ver.Spread:15.2	Horiz.Spread:15.5

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

