

CODE:

BO-B4SB0957-UL

LIGHT SOURCE:

9 × 1.5W

SELECTED DEEGRE

20°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

1500 mA

CONSUMPTION:

18W

LUMINANCE:


CW=1317 WW=1054

IK:

09

FRONT COVER & HOUSING LIGHT	Hard chromeplated molding shaped stainless steel SUS 316#
WINDOW	Step tempered glass. T=9mm
CABLE GLAND	IP68 PG-11 copper with nickel-coated
GASKET	Silicone gasket
PCB	Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk
LED DRIVER	Constant Voltage Input,Constant Current Output. Build inside
OPERATING TEMPERATURE	Temperature of water between -20°C~40°C less than 1 meter depth
BUILT-IN OVERHEAT SENSOR SYSTEM	Automatic Shutdown at 75°C
POWER CABLE OPTIONAL	Outside of luminaire H07RN-F 2×1.0mm ² with water-stopper, L=1m, 3m, 5m
DIMMING SUPPORT	Triac PWM Available: 1-10V / Dali / Customized

OPTICS Referenced Degree(°)

	B13	6°	13°	20°	30°	40°
---	-----	----	-----	-----	-----	-----

WATER PROOF SOLUTION




- A Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP68 Jiffy quick plug/socket connector(Optional)**
A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

DETAILED VIEW






Central Ejective



Water jet pipe G3/4"taper

PHOTOMETRIC

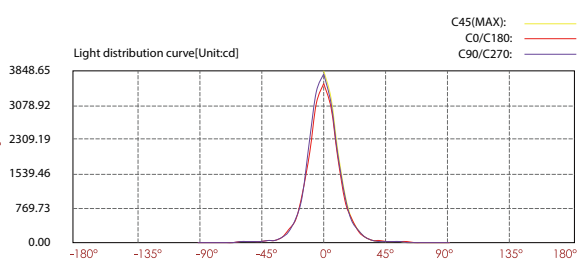

Lux distance cure

	Illuminance at a distance		Beam width	
	Center beam LUX	Beam width V	H	
2m	890.78 LUX	0.8m	0.7m	
4m	222.70 LUX	1.6m	1.5m	
6m	98.98 LUX	2.4m	2.2m	
8m	55.67 LUX	3.2m	3.0m	
10m	35.63 LUX	4.0m	3.7m	
12m	24.74 LUX	4.7m	4.4m	

Ver.Spread22.4 Horiz.Spread21.0



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.