





CODE: BO-B3LA0366-SP



SMALL (S)



**LIGHT SOURCE:**

3 × 7.2W NICHIA

**LENS:**

A24A

**SELECTED DEGREE:**

15°

**INPUT VOLTAGE:**

110-277V

**OPERATION CURRENT:**

1153 mA

**CONSUMPTION:**

27.7 W


**LUMINANCE:**

1745 lm



**IK:**

05

CODE: BO-B3KA0657-SP

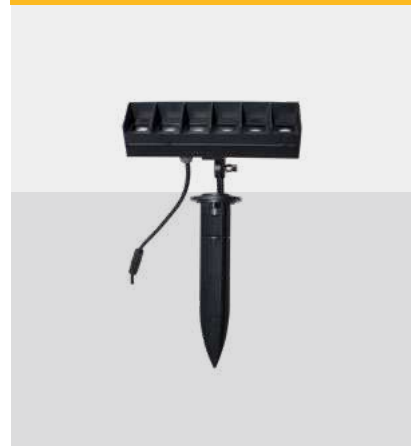

MEDIUM (M)



**LIGHT SOURCE:**

6 × 2W OSRAM

**LENS:**

B17

**SELECTED DEGREE:**

20°

**INPUT VOLTAGE:**

110-277V

**OPERATION CURRENT:**

491 mA

**CONSUMPTION:**

11.8 W

**LUMINANCE:**

677 lm

**IK:**

06



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



### LIGHTING INFORMATION

<b>HOUSING</b>	Extruded aluminum, powder coated
<b>LENS</b>	OPTICS lens, efficiency ≥ 85%
<b>LIGHT WINDOW</b>	Tempered glass, T=4mm
<b>CABLE GLAND</b>	IP-68 PG-9 PA66
<b>GASKET</b>	Glass and housing are silicone sealed
<b>LED</b>	NICHIA SMD 3535
<b>OPERATING TEMPERATURE</b>	-20°C ~ 40°C
<b>POWER CABLE</b>	Outside of luminaire 110-277V; H05RN-F 3×1.0mm <sup>2</sup> , L=2.0m
<b>SPIKE</b>	ABS spike 7C

### REGULAR PAINTING COLOR

	Dark Grey KAP 7037		Silver Grey KAP 9022		Sanded Black RAL 9005
--	-----------------------	--	-------------------------	--	--------------------------


### OPTICS

Referenced Degree(°) 1/2

	<b>A24A</b>	15°	30°	15°×30°	15°×45°
	<b>B17</b>	15°	20°	30°	45°

### ADJUSTABLE BEAM DIRECTION

Approximately



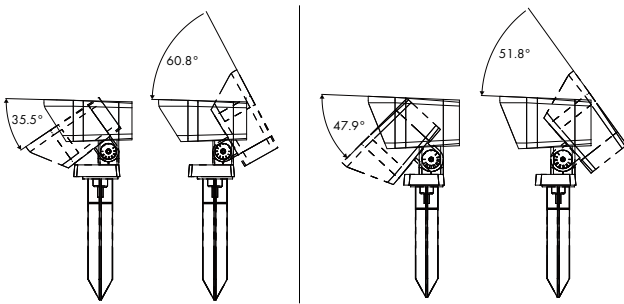


### WATER PROOF SOLUTION

- A Water-Stopper (Included)**  
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector (Option)**  
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



### PHOTOMETRIC

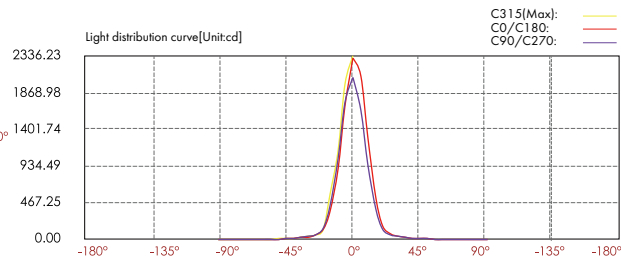




Lux distance cure

Illuminance at a distance

Center beam LUX	Beam width V	Beam width H
2m	0.7m	0.6m
4m	1.4m	1.2m
6m	2.0m	1.9m
8m	2.7m	2.5m
10m	3.4m	3.1m
12m	4.1m	3.7m

Ver. Spread: 19.4 Horiz. Spread: 17.6

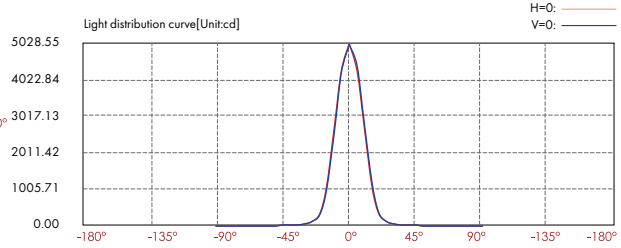

Lux distance cure

Illuminance at a distance

Center beam LUX	Beam width V	Beam width H
2m	0.8m	0.8m
4m	1.5m	1.5m
6m	2.3m	2.3m
8m	3.0m	3.0m
10m	3.8m	3.8m
12m	4.6m	4.6m

Ver. Spread: 21.6 Horiz. Spread: 21.5

sales@gordonbullard.com  
www.bullardoutdoor.com



991 South Gull Lake Dr  
Richland, MI 49083

1-877-964-4646 C LISTED US USA

## HOW TO ORDER:

CODE:

CODE: BO-B3LA0366-SP



SMALL (S)

CODE: BO-B3KA0657-SP



MEDIUM (M)




### EXAMPLE:

BO-B3LA0366-SP-KAP7037-A-B

## 1. CHOOSE FIXTURE SIZE:


BO-B3LA0366-SP      SMALL  
BO-B3KA0657-SP      MEDIUM

## 2. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

## 3. WATER PROOF SOLUTION (included)

- A **A Water-Stopper (Included)**  
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

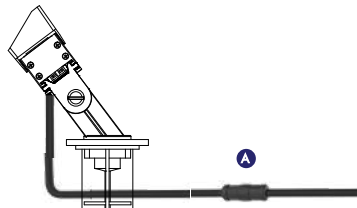

## 4. WATER PROOF SOLUTION (optional):

- B **IP67 Jiffy quick plug/socket connector (Option)**  
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA