


CODE: BO-B3BG0127-SP



SMALL (S)



**LIGHT SOURCE:**

1×6W

**LENS:**

B55

**SELECTED DEGREE:**

24°

**INPUT VOLTAGE:**

110-277V

**OPERATION CURRENT:**

35 mA

**CONSUMPTION:**

7.3 W

**LUMINANCE:**

548 lm


**IK:**

07

CODE: BO-B3BH0129-SP



MEDIUM (M)

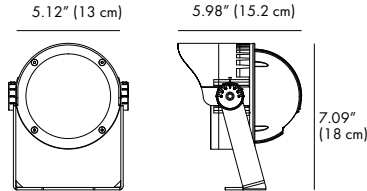

**LIGHT SOURCE:**

1×12W

**LENS:**

B56

**SELECTED DEGREE:**

24°

**INPUT VOLTAGE:**

110-277V

**OPERATION CURRENT:**

68 mA

**CONSUMPTION:**

14 W

**LUMINANCE:**

1263 lm


**IK:**

07

CODE: BO-B3BI0170-SP



LARGE (L)

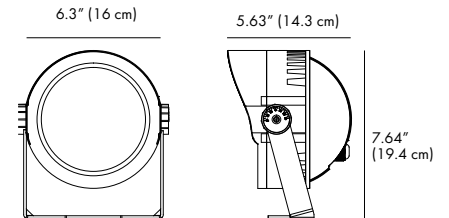

**LIGHT SOURCE:**

1×18W

**LENS:**

B57

**SELECTED DEGREE:**

24°

**INPUT VOLTAGE:**

110-277V

**OPERATION CURRENT:**

99 mA

**CONSUMPTION:**

20.4 W

**LUMINANCE:**

2101 lm

**IK:**

07



**LIGHTING INFORMATION**




<b>HOUSING</b>	12# Die-casting aluminium finishing or powder painting T=60-80µm. Adhesion of ISO class 1/ASTM class 4B All-in-one
<b>LENS</b>	OPTICS lens, efficiency≥85%
<b>LIGHT WINDOW</b>	Tempered glass. T=4mm
<b>CABLE GLAND</b>	IP68 PG-9 PA66
<b>GASKET</b>	Tooling shaped seal
<b>BRACKET</b>	Powder coated aluminum
<b>POWER CABLE</b>	Outside of luminaire 110-277V: H05RN-F 3×1.0mm <sup>2</sup> , L=2.0m

**REGULAR PAINTING COLOR**

 Dark Grey <b>KAP 7037</b>	 Silver Grey <b>KAP 9022</b>	 Sanded Black <b>RAL 9005</b>
--	--	---

**OPTICS**


Referenced Degree(°)θ1/2

	<b>B55</b>	<b>18°</b>	<b>28°</b>	<b>38°</b>	
	<b>B56</b>	<b>15°</b>	<b>24°</b>	<b>38°</b>	
	<b>B57</b>	<b>12°</b>	<b>24°</b>	<b>36°</b>	<b>60°</b>


**ACCESSORIES (Optional)**

**SPIKE**


PC/ABS alloys

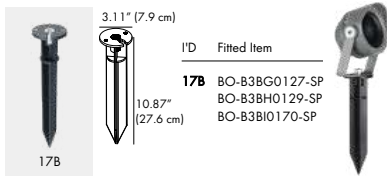

STAINLESS STEEL

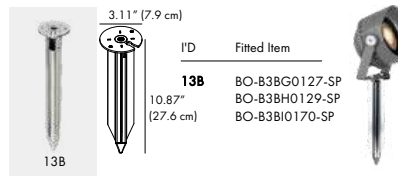

**ROUND SURFACE MOUNTING BASE**

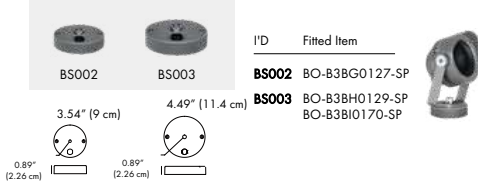


**FEARURE**



**Gear:** The gear between the luminaire housing and the U bracket to prevent sliding.

**FEATURE**

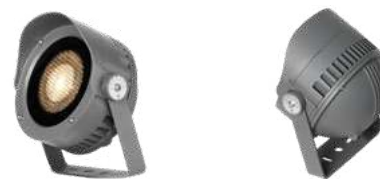

**WATER PROOF SOLUTION**



**A Water-Stopper (Included)**

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

**B IP67 Jiffy quick plug/socket connector (Option)**

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646






991 South Gull Lake Dr

Richland, MI 49083

USA




**PHOTOMETRIC**

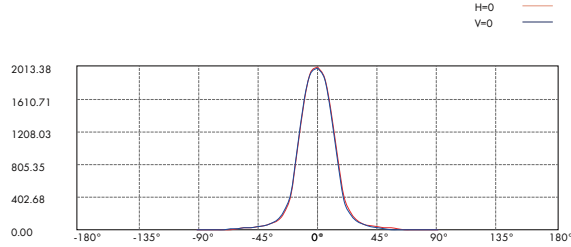

Lux distance Curve

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width V x H
2m	499.24 LUX	1.0m x 1.0m
4m	124.81 LUX	2.0m x 2.0m
6m	55.47 LUX	3.1m x 3.0m
8m	31.20 LUX	4.1m x 4.1m
10m	19.97 LUX	5.1m x 5.1m
12m	13.87 LUX	6.1m x 6.1m



Vert.Spread:28.6 Horiz.Spread:28.5

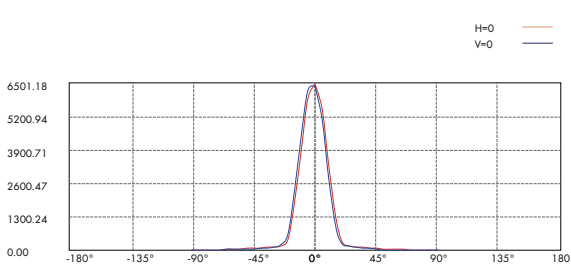

Lux distance Curve

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width V x H
2m	1618.03 LUX	0.8m x 0.8m
4m	404.51 LUX	1.6m x 1.6m
6m	179.78 LUX	2.3m x 2.3m
8m	101.13 LUX	3.1m x 3.1m
10m	64.72 LUX	3.9m x 3.9m
12m	44.95 LUX	4.7m x 4.7m

Vert.Spread:22.1 Horiz.Spread:22.1

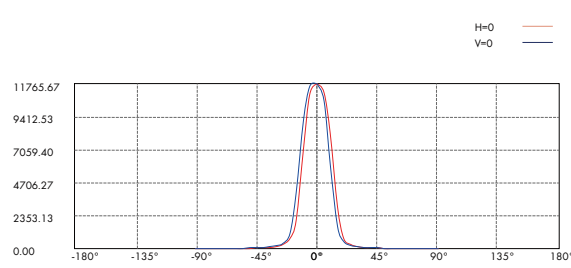

Lux distance Curve

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width V x H
2m	2941.42 LUX	0.8m x 0.8m
4m	735.35 LUX	1.7m x 1.6m
6m	326.82 LUX	2.5m x 2.5m
8m	183.84 LUX	3.3m x 3.3m
10m	117.66 LUX	4.1m x 4.1m
12m	81.71 LUX	5.0m x 4.9m

Vert.Spread:23.4 Horiz.Spread:23.3

sales@gordonbullard.com  
www.bullardoutdoor.com




991 South Gull Lake Dr  
Richland, MI 49083

1-877-964-4646 C LISTED US USA

## HOW TO ORDER:


CODE:

CODE: BO-B3BG0127-SP

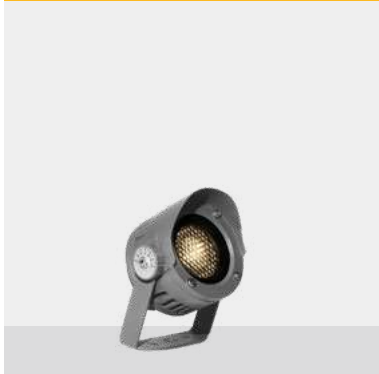

SMALL (S)

CODE: BO-B3BH0129-SP

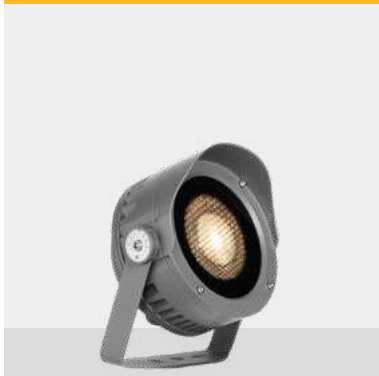

MEDIUM (M)

CODE: BO-B3BI0170-SP



LARGE (L)




### EXAMPLE:

BO-B3BG0127-SP-KAP7037-BS002-A-B

## 1. CHOOSE FIXTURE SIZE:

BO-B3BG0127-SP	SMALL
BO-B3BH0129-SP	MEDIUM
BO-B3BI0170-SP	LARGE


## 2. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

## 3. SPIKE (OPTIONAL):


STAINLESS STEEL:

-13B

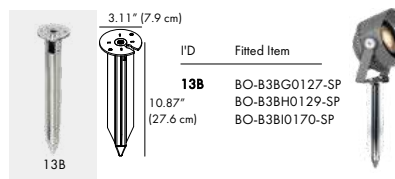

PC/ABS alloys:

-17B

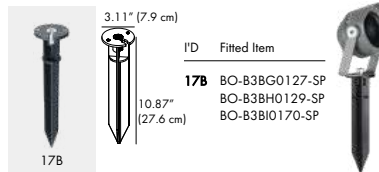

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

## HOW TO ORDER:


CODE:

CODE: BO-B3BG0127-SP

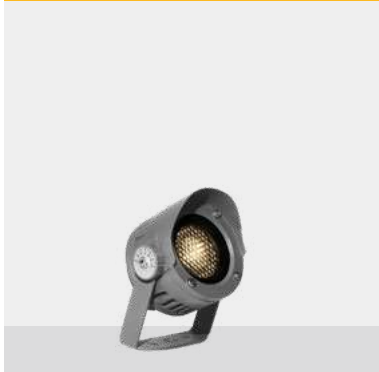

SMALL (S)

CODE: BO-B3BH0129-SP

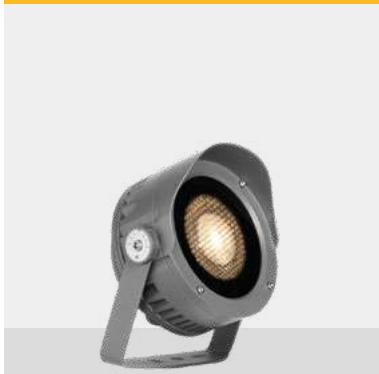

MEDIUM (M)

CODE: BO-B3BI0170-SP



LARGE (L)

### EXAMPLE:

BO-B3BG0127-SP-KAP7037-BS002-A-B

## 4. SURFACE MOUNTING BASE (optional):

-BS002

-BS003

### ROUND SURFACE MOUNTING BASE



3.54" (9 cm)

4.49" (11.4 cm)



ID Fitted Item

**BS002** BO-B3BG0127-SP


**BS003** BO-B3BH0129-SP  
BO-B3BI0170-SP



## 5. WATER PROOF SOLUTION (included):

### -A Water-Stopper (Included)

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.



## 6. WATER PROOF SOLUTION (optional):

### -B IP67 Jiffy quick plug/socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

