


CODE: BO-D7AA0137-WL

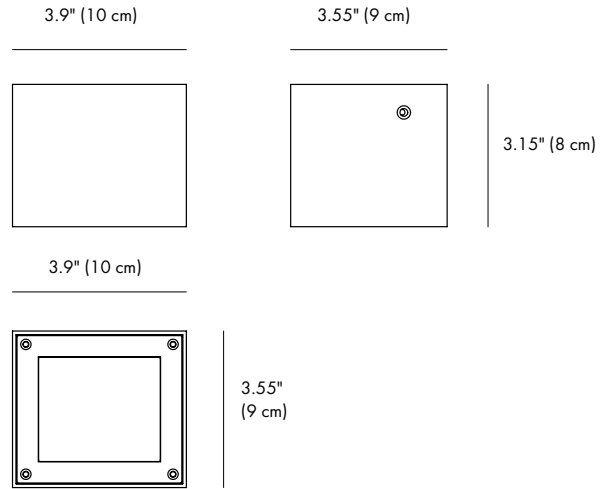

LIGHT SOURCE:

1 × 3W NICHIA

SELECTED DEGREE(°):

120°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA

CONSUMPTION:

5.4W

LUMINANCE:

155

IK:

05

HOUSING

12# Die-casting aluminum finishing or powder painting
T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
UVstop & Fireproof PC T=6mm

LIGHT WINDOW

GASKET

Tooling shaped seal

DRIVER

Main voltage 100V-240V driver inside builded

OPERATING TEMPERATURE

-20°C-40°C


POWER CABLE

Outside of luminaire
110-277V H05RN-F 3×1.0mm², L=0.3m

REGULAR PAINTING COLOR



DIAGRAM OF INSTRUCTION

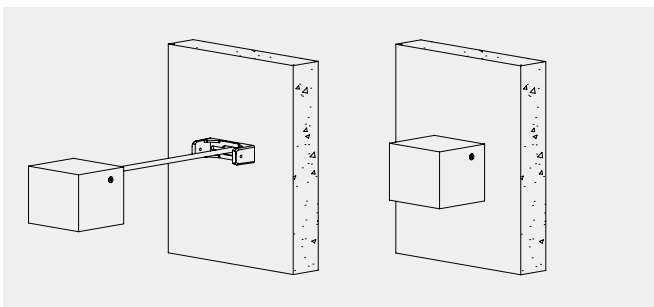

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646





991 South Gull Lake Dr
Richland, MI 49083
USA

BEAM DEMO



PHOTOMETRIC

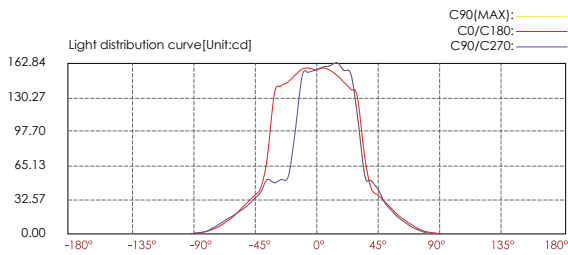

Lux distance curve

	Illuminance at a distance		Beam width	
	Center beam LUX	Beam width V	H	
2m	39.01 LUX	1.8m	2.8m	
4m	9.75 LUX	3.7m	5.6m	
6m	4.33 LUX	5.5m	8.5m	
8m	2.44 LUX	7.3m	11.3m	
10m	1.56 LUX	9.2m	14.1m	
12m	1.08 LUX	11.0m	16.9m	

Ver.Spread:49.3 Horiz.Spread:70.4

HELIX

HOW TO ORDER:

CODE:

CODE: BO-D7AA0137-WL

EXAMPLE:

BO-D7AA0137-WL-BKAP 7037

BO-D7AA0137-WL-BKAP 7037

1. CHOOSE FIXTURE SIZE:

BO-D7AA0137-WL

2. BODY FINISH OPTIONS:

-  **-BKAP 7037** Dark Grey
-  **-RAL 9023** Silver Grey
-  **-RAL 9005** Sanded Black

