




CODE: BO-B3DVU0127-SP



SMALL (S)

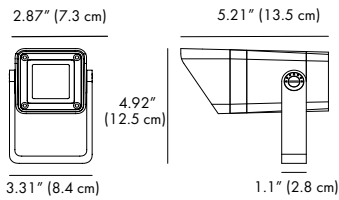

LIGHT SOURCE:

1×8W

LENS:

B71

SELECTED DEGREE:

24°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

45 mA

CONSUMPTION:

10 W


LUMINANCE:

792 lm

CODE: BO-B3DWU0460-SP



MEDIUM (M)

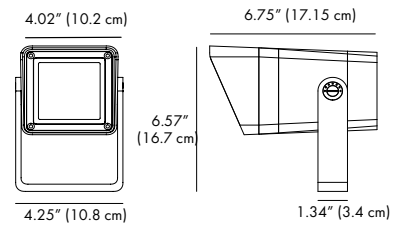

LIGHT SOURCE:

4×4W

LENS:

FB11B4

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

78 mA

CONSUMPTION:

17.4 W

LUMINANCE:

1227 lm



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



LIGHTING INFORMATION



HOUSING	12# Die-casting aluminium finishing or powder painting T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LENS	OPTICS lens, efficiency ≥ 85%
LIGHT WINDOW	Tempered glass, T=4mm
CABLE GLAND	IP68 PG-9 PA66
GASKET	Tooling shaped seal
BRACKET	Powder coated aluminum
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=2.0m

REGULAR PAINTING COLOR

 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005
---	---	--

OPTICS


Referenced Degree(°)θ1/2

	B71	15°	24°	33°	45°	60°
	FB11B4	9°	15°	20°	30°	45° 60°

ACCESSORIES


SPIKE

PC/ABS alloys

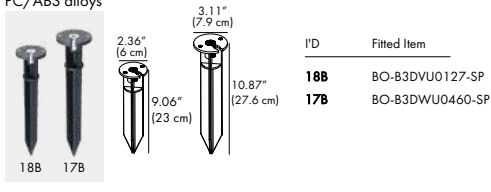


I'D	Fitted Item
18B	BO-B3DVU0127-SP
17B	BO-B3DWU0460-SP

STAINLESS STEEL

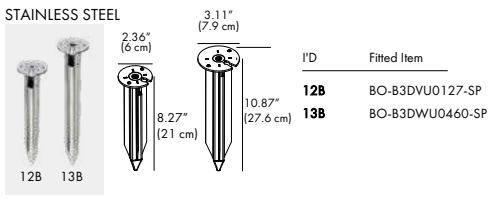

I'D	Fitted Item
12B	BO-B3DVU0127-SP
13B	BO-B3DWU0460-SP

TREE POLE STRAP

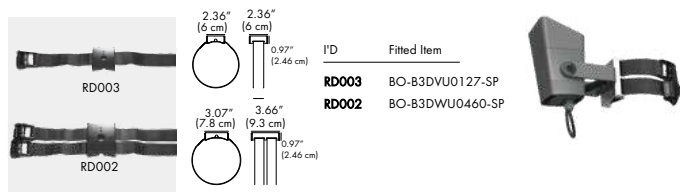


I'D	Fitted Item
RD003	BO-B3DVU0127-SP
RD002	BO-B3DWU0460-SP

OVERVIEW



WATER PROOF SOLUTION

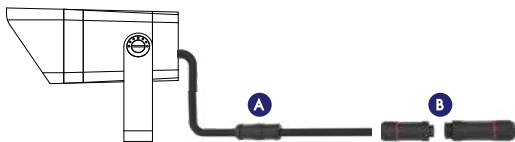

- A Water-Stopper (Included)**
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector (Option)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.




sales@gordonbullard.com
www.bullardoutdoor.com



991 South Gull Lake Dr
Richland, MI 49083
USA

1-877-964-4646




PHOTOMETRIC

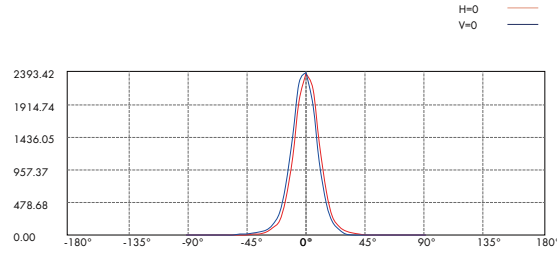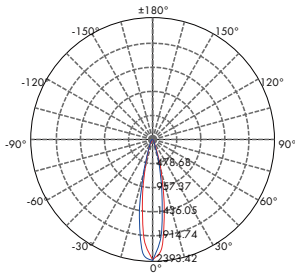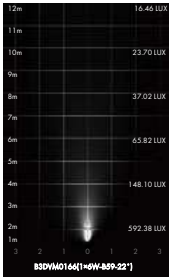

Lux distance Curve

Distance	Illuminance at a Distance	
	Center Beam LUX	Beam Width V x H
2m	592.38 LUX	0.7m 0.7m
4m	148.10 LUX	1.5m 1.5m
6m	65.82 LUX	2.2m 2.2m
8m	37.02 LUX	3.0m 3.0m
10m	23.70 LUX	3.7m 3.7m
12m	16.46 LUX	4.4m 4.5m

Vert.Spread:20.9 Horiz.Spread:21.2

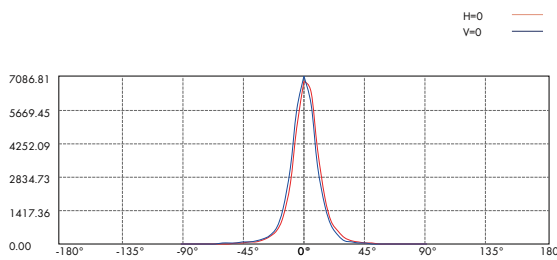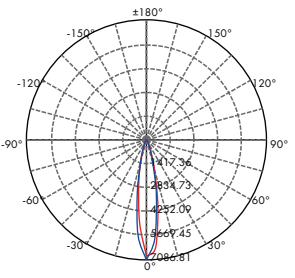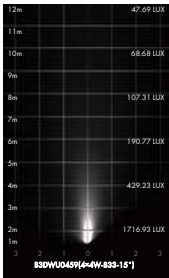

Lux distance Curve

Distance	Illuminance at a Distance	
	Center Beam LUX	Beam Width V x H
2m	1716.93 LUX	0.7m 0.7m
4m	429.23 LUX	1.3m 1.3m
6m	190.77 LUX	2.0m 2.0m
8m	107.31 LUX	2.7m 2.7m
10m	68.68 LUX	3.4m 3.3m
12m	47.69 LUX	4.0m 4.0m

Vert.Spread:19.1 Horiz.Spread:18.8


sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

HOW TO ORDER:

CODE:

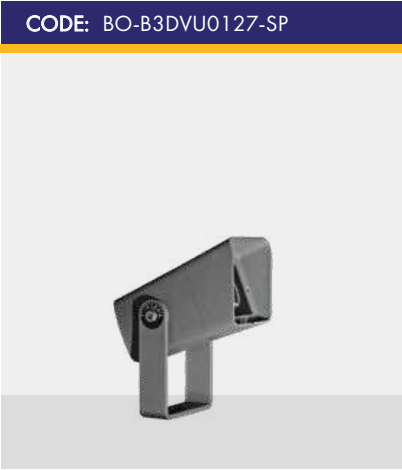

SMALL (S)



MEDIUM (M)

EXAMPLE:




BO-B3DVU0127-SP-KAP7037-18B-A

1. CHOOSE FIXTURE SIZE:

BO-B3DVU0127-SP SMALL

BO-B3DWU0460-SP MEDIUM


2. BODY FINISH OPTIONS:

-  **-KAP 7037** Dark Grey
-  **-KAP 9022** Silver Grey
-  **-RAL 9005** Sanded Black

3. SPIKE (OPTIONAL):

STAINLESS STEEL:

-12B
-13B

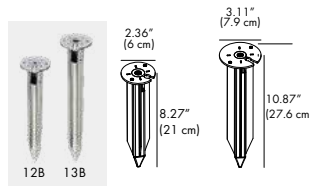


I'D	Fitted Item
12B	BO-B3DVU0127-SP
13B	BO-B3DWU0460-SP



PC/ABS alloys:

-18B
-17B

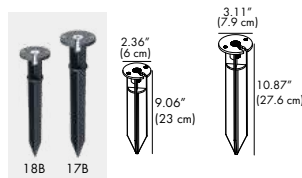

I'D	Fitted Item
18B	BO-B3DVU0127-SP
17B	BO-B3DWU0460-SP



HOW TO ORDER:

CODE:

CODE: BO-B3DVU0127-SP



SMALL (S)

CODE: BO-B3DWU0460-SP



MEDIUM (M)


EXAMPLE:

BO-B3DVU0127-SP-KAP7037-17B-RD003-A-B

4. TREE POLE STRAP:

-RD003

-RD002

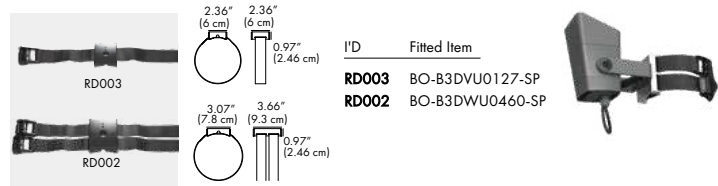


I'D	Fitted Item
RD003	BO-B3DVU0127-SP
RD002	BO-B3DWU0460-SP

5. WATER PROOF SOLUTION (included):

-A Water-Stopper (Included)

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

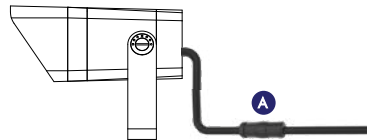

6. WATER PROOF SOLUTION (optional):

-B IP67 Jiffy quick plug/socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

