


BO-D1GB0334-WL

2.75" (7 cm)

1.85" (4.7 cm)








CODE:

1.85" (4.7 cm)





LIGHT SOURCE:

3 × 0.7W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

29 mA

CONSUMPTION:

3.1W

LUMINANCE:

CW=39 | WW=36

IK:

10

LIGHT SOURCE:

3 × 0.7W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

29 mA

CONSUMPTION:

3.1W

LUMINANCE:

CW=25 | WW=22

IK:

10





LIGHTING INFORMATION

FRONT COVER

12# Die-casting aluminum powder coated. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B

HOUSING

12# Die-casting aluminum powder coated. T=60-80µm. Adhesion of ISO class 1/ ASTM class 4B

LIGHT WINDOW UVstop & Fireproof PC

CABLE GLAND IP67 Copper and nicked coated **GASKET** Molding shaped silicone seal

RECESSED SLEEVE Stainless steel 178#

LED DRIVER Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE -20°C~40°C

POWER CABLE

Outside of luminaire H05RN-F 3×1.0mm², L=0.5m(120V/240V)

LED SMD3030 ΙP IP65

Triac PWM Available 1-10V Dali Customized DIMMING SUPPORT

REGULAR PAINTING COLOR

Basic

Dark Grey **KAP 7037**

Secondary

Silver Grey KAP 9022

Sanded Black RAL 9005

RECESSED SLEEVE (Included)



178# Stainless steel 2.6" (2.66")


3.3" (8.5 cm)





2.55" (6.55 cm)

DIAGRAM OF INSTRUCTION



FEATURES



• Front cover without screws



• Use the high-strength clips for installation and ixation.(please refer remark 1)


sales@gordonbullarda.com www.bullardoutdoor.com 1-877-964-4646 C



991 South Gull Lake Dr Richland, MI 49083 USA



PHOTOMETRIC

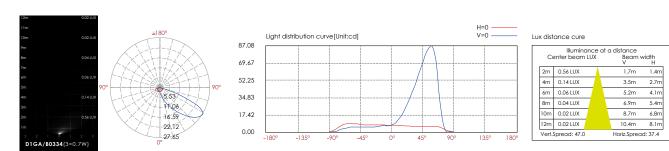





VIZO

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D1GA0334-WL-BKAP 7037

BO-D1GA0334-WL-BKAP 7037

1.CHOOSE FIXTURE SIZE:

BO-D1GA0334-WL

BO-D1GB0334-WL

2.BODY FINSIH OPTIONS:

-BKAP 7037 Dark Grey

-RAL 9023 Silver Grey

-RAL 9005 Sanded Black