




CODE: BO-C3EME0458-SP



SMALL (S)

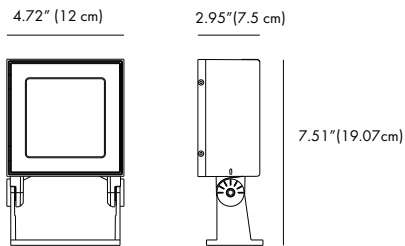

LIGHT SOURCE:

4x3W NICHIA

LENS:

C18

SELECTED DEGREE:

65°x55°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

56 mA

CONSUMPTION:

12,6 mA

LUMINANCE:

520 lm


IK:

05

CODE: BO-C3FME1057-SP



MEDIUM (L)

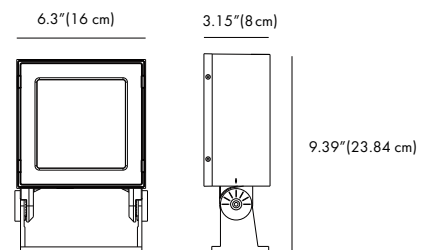

LIGHT SOURCE:

10x1.8W NICHIA

LENS:

C18

SELECTED DEGREE:

85°x55°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

93mA

CONSUMPTION:

20.9 mA

LUMINANCE:

680 lm

IK:

06



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



LIGHTING INFORMATION

HOUSING	12# Die-casting aluminium finishing or powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered glass.T=3mm
LED	NICHIA
LED DRIVER	Constant Voltage Input,Constant Current Output
CABLE GLAND	IP68 PG-9 PA66
GASKET	Tooling shaped seal
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=2.0m

REGULAR PAINTING COLOR

 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005
---	---	--

OPTICS Referenced Degree(°)θ1/2

 C18	$L01\frac{80}{60} F077YS$
--	---------------------------

FEATURE



Gear : The gear between the luminaire housing and the U bracket to prevent sliding.

OVERVIEW




WATER PROOF SOLUTION



- A Water-Stopper (Included)**
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector (Option)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

LIGHT APPLICATION



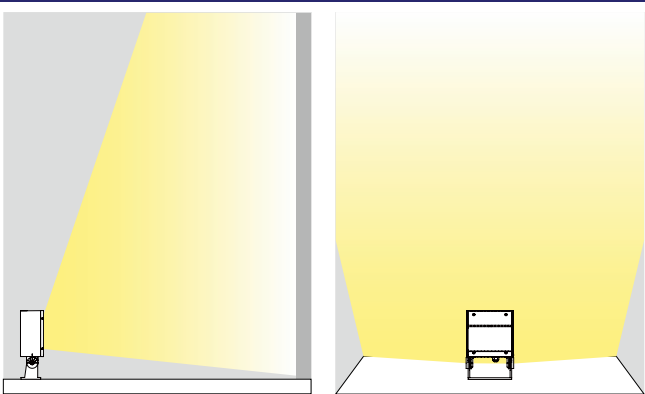


sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA




PHOTOMETRIC

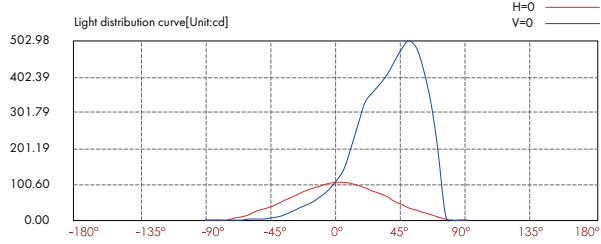

Lux distance cure

Center beam LUX	Beam width	
	V	H
2m 26.95 LUX	2.5m	2.1m
4m 6.74 LUX	5.0m	4.1m
6m 2.99 LUX	7.5m	6.2m
8m 1.68 LUX	9.9m	8.3m
10m 1.08 LUX	12.4m	10.3m
12m 0.75 LUX	14.9m	12.4m

Ver.Spread: 63.7 Horiz.Spread: 54.7

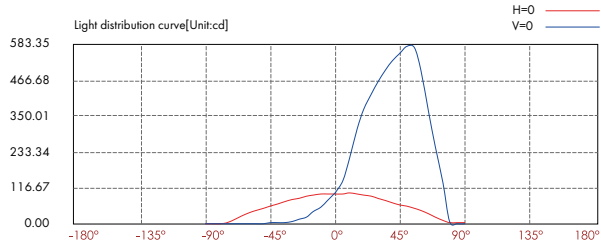

Lux distance cure

Center beam LUX	Beam width	
	V	H
2m 24.40 LUX	2.7m	2.0m
4m 6.10 LUX	5.3m	4.1m
6m 2.71 LUX	8.0m	6.1m
8m 1.53 LUX	10.6m	8.2m
10m 0.98 LUX	13.3m	10.2m
12m 0.68 LUX	16.0m	12.3m

Ver.Spread: 67.3 Horiz.Spread: 54.3

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HOW TO ORDER:

CODE:

CODE: BO-C3EME0458-SP



SMALL (S)

CODE: BO-C3FME1057-SP



MEDIUM (M)




EXAMPLE:

BO-C3EME0458-SP-KAP7037-A-B

1. CHOOSE FIXTURE SIZE:

BO-C3EME0458-SP SMALL
BO-C3FME1057-SP MEDIUM


2. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

3. WATER PROOF SOLUTION (included)

-A A Water-Stopper (Included)

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.



4. WATER PROOF SOLUTION (optional):

-B IP67 Jiffy quick plug/socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA