

CODE:

BO-1ED7GBC0556-WL

LIGHT SOURCE:

5 × 1W

SELECTED DEGREE:

92° × 75°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

31mA

CONSUMPTION:

6.4W

LUMINANCE:

792 lm

IK:

03

CODE:

BO-1ED7HBC0956-WL

LIGHT SOURCE:

9 × 1W

SELECTED DEGREE:

92° × 75°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

59 mA

CONSUMPTION:

10.5W

LUMINANCE:

836 lm

IK:

04



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA


LIGHTING INFORMATION

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80µm.Adhesion of ISO class 1/ASTM class 4B
GLASS	T=3mm
GASKET	Tooling shaped seal
LED	OSRAM
DRIVER	Driver inside builded
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=0.3m
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized


REGULAR PAINTING COLOR

Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

DIAGRAM OF INSTRUCTION

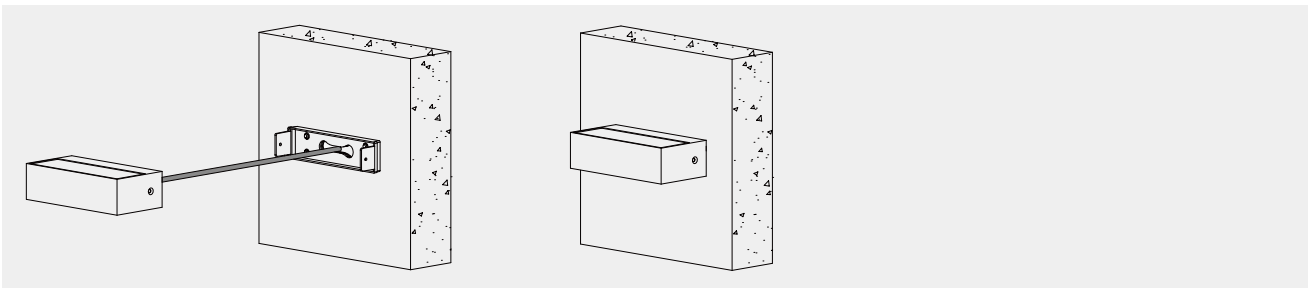

PHOTOMETRIC

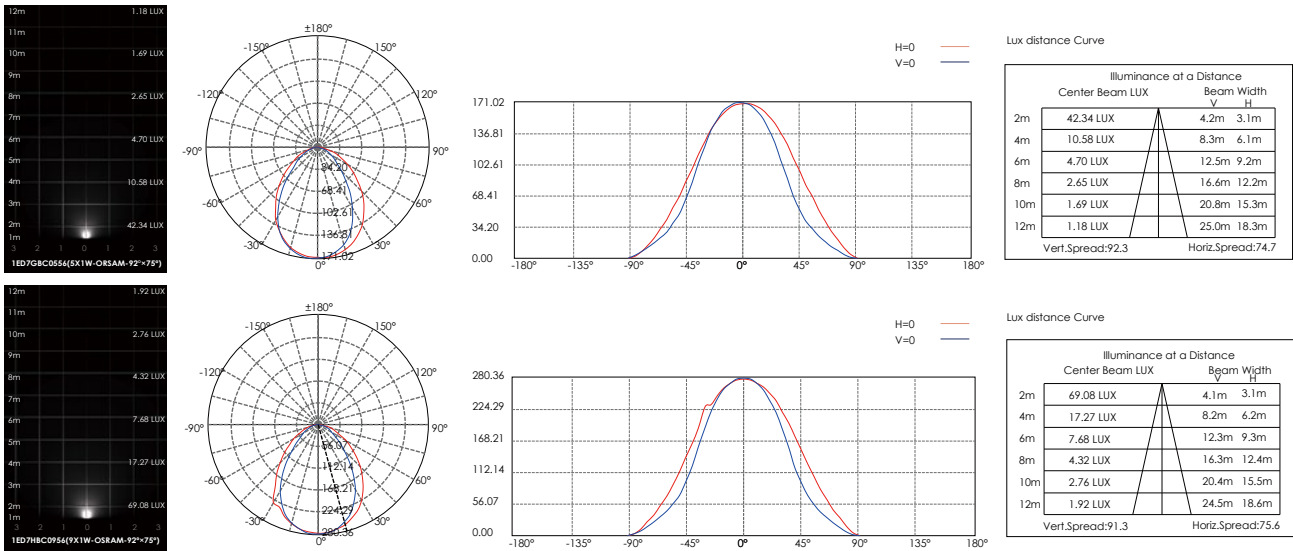

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA