

CODE: BO-B8VH0126-CL







CODE: BO-B8WH0170-CL



CODE: BO-B8XH0174-CL



CODE: BO-B8YH0176-CL

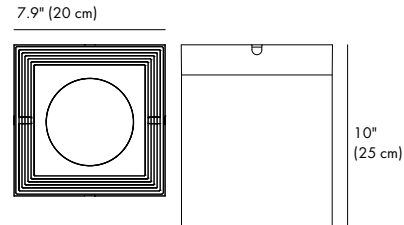

LIGHT SOURCE:

1 × 6W

LENS / SELECTED DEGREE(°)Ø1/2

B71 / 60°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

36 mA

CONSUMPTION:

8W

LUMINANCE:

699 lm

IK:

08

LIGHT SOURCE:

1 × 18W

LENS / SELECTED DEGREE(°)Ø1/2

B66 / 55°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

90 mA

CONSUMPTION:

21W

LUMINANCE:

2098 lm

IK:

08

LIGHT SOURCE:

1 × 29W

LENS / SELECTED DEGREE(°)Ø1/2

B57 / 60°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

146 mA

CONSUMPTION:

31W

LUMINANCE:

2777 lm

IK:

08

LIGHT SOURCE:

1 × 40W

LENS / SELECTED DEGREE(°)Ø1/2

B57 / 60°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

190 mA

CONSUMPTION:

45W

LUMINANCE:

4620 lm

IK:

08

HOUSING MATERIAL	Extruded aluminum alloy #6063
PAINTING	Powder coating, T= 60~80 μm. Adhesion of ISO class 1 / ASTM class 4B
REFLECTOR	OPTICS reflector. efficiency≥85%
LED	NICHIA
CRI	90
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
POWER CABLE	Outside of luminaire H05RN-F 3×1.0mm ² , L=0.3m(110-277V)
OPERATING TEMPERATURE	-20° C~40° C

FINISH OPTIONS

Basic	Secondary
 Dark Grey KAP 7037	 Sanded Black RAL 9005
	 Sanded White RAL 9003

OPTICS

Referenced Degree(°)θ1/2

	B71	15°	24°	33°	45°	60°
	B66	15°	20°	25°	38°	55°
	B57	15°	25°	36°	60°	



FEATURES



Safety hook



Hook at the fixator for safer wiring, leave the hook for protection.

PHOTOMETRIC

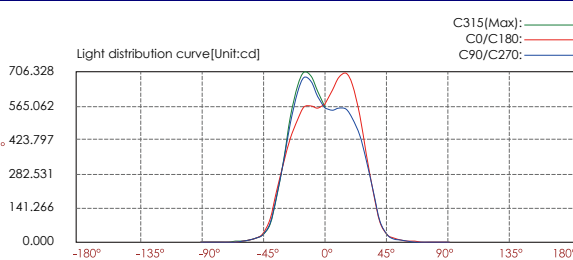




Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	H	
2m 143.86 LUX	2.5m	2.5m	
4m 35.97 LUX	5.1m	5.0m	
6m 15.98 LUX	7.6m	7.5m	
8m 8.99 LUX	10.2m	10.1m	
10m 5.75 LUX	12.7m	12.6m	
12m 4.00 LUX	15.3m	15.1m	
Horiz.Spread:64.9	Vert.Spread:64.4		

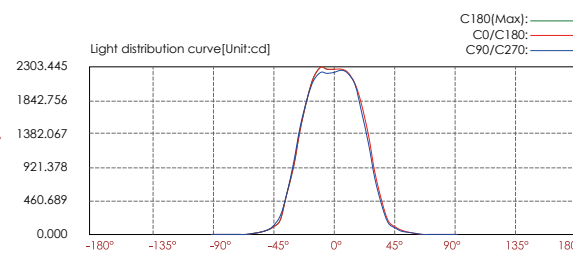




Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	H	
2m 570.40 LUX	2.1m	2.1m	
4m 142.60 LUX	4.2m	4.2m	
6m 63.38 LUX	6.3m	6.3m	
8m 35.65 LUX	8.4m	8.4m	
10m 22.82 LUX	10.5m	10.4m	
12m 15.84 LUX	12.7m	12.5m	
Horiz.Spread:55.6	Vert.Spread:55.2		

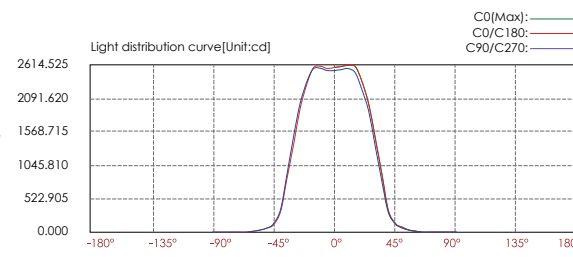

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	H	
2m 645.83 LUX	2.5m	2.5m	
4m 161.46 LUX	4.9m	4.9m	
6m 71.76 LUX	7.4m	7.4m	
8m 40.36 LUX	9.9m	9.8m	
10m 25.83 LUX	12.3m	12.3m	
12m 17.94 LUX	14.8m	14.7m	
Horiz.Spread:63.3	Vert.Spread:63.0		

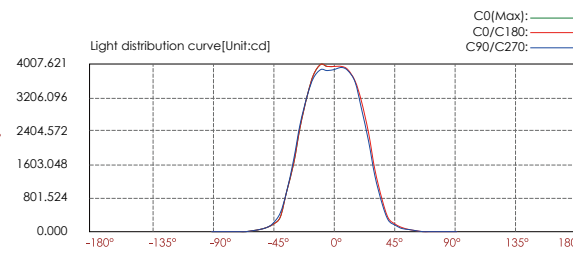

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	H	
2m 570.40 LUX	2.1m	2.1m	
4m 142.60 LUX	4.2m	4.2m	
6m 63.38 LUX	6.3m	6.3m	
8m 35.65 LUX	8.4m	8.4m	
10m 22.82 LUX	10.5m	10.4m	
12m 15.84 LUX	12.7m	12.5m	
Horiz.Spread:55.6	Vert.Spread:55.2		

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

MIRAM COLLECTION

CODE: BO-B8VH0126-CL



SMALL (S)

CODE: BO-B8WH0170-CL



MEDIUM (S)

CODE: BO-B8XH0174-CL



LARGE (S)

CODE: BO-B8YH0176-CL



EXTRA LARGE (S)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-C3EME0458-SP-K30-KAP7037-A-B

1. CHOOSE FIXTURE SIZE:

BO-B8VH0126-CL	SMALL
BO-B8WH0170-CL	MEDIUM
BO-B8XH0174-CL	LARGE
BO-B8YH0176-CL	EXTRA LARGE

2. CHOOSE CCT

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black