


CODE: BO-B8ELB0459-CL



LIGHT SOURCE:

4 × 3.5W

SELECTED DEGREE:

30°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

73 mA

CONSUMPTION:

17W


LUMINANCE:

1206 lm

IK:

06

CODE: BO-B3LA0366-CL

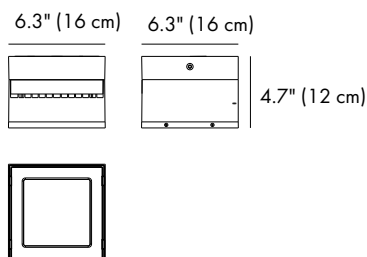

LIGHT SOURCE:

9 × 3W

SELECTED DEGREE:

30°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

133 mA

CONSUMPTION:

30W

LUMINANCE:

2541 lm

IK:

06

HOUSING MATERIAL	Extruded aluminum alloy #6063
PAINTING	Powder coating, T= 60~80 µm. Adhesion of ISO class 1 / ASTM class 4B
REFLECTOR	OPTICS reflector. efficiency≥85%
CRI	90
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
LED	NICHIA
POWER CABLE	Outside of luminaire H05RN-F 3×1.0mm ² , L=0.3m(110-277V)
OPERATING TEMPERATURE	-20 °C~40 °C

FINISH OPTIONS

Basic




Secondary






ACCESSORIES

BEVEL CUT HOOD



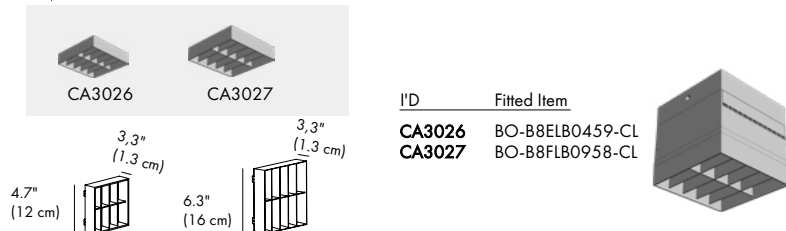


PHOTOMETRIC

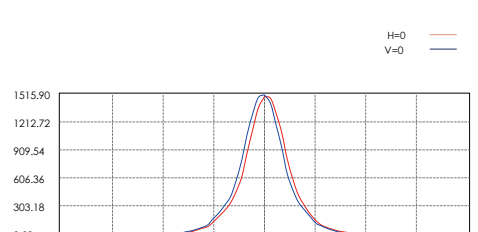




Lux distance Curve

Illuminance at a Distance			
Center Beam LUX	Beam Width V	Beam Width H	
2m 369.27 LUX	1.4m	1.4m	
4m 92.32 LUX	2.8m	2.8m	
6m 41.03 LUX	4.2m	4.3m	
8m 23.08 LUX	5.6m	5.7m	
10m 14.77 LUX	7.0m	7.1m	
12m 10.26 LUX	8.4m	8.5m	
Vert.Spread:38.6		Horiz.Spread:39.0	

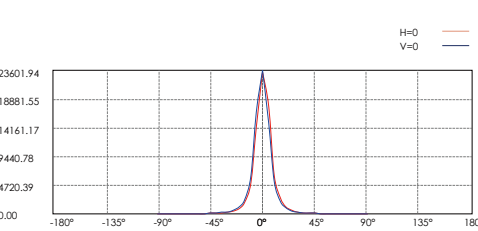

Lux distance Curve

Illuminance at a Distance			
Center Beam LUX	Beam Width V	Beam Width H	
2m 5827.80 LUX	0.5m	0.5m	
4m 1456.95 LUX	1.0m	1.0m	
6m 647.53 LUX	1.5m	1.5m	
8m 364.24 LUX	2.0m	2.0m	
10m 233.11 LUX	2.4m	2.4m	
12m 161.88 LUX	2.9m	2.9m	
Vert.Spread:14.0		Horiz.Spread:14.0	

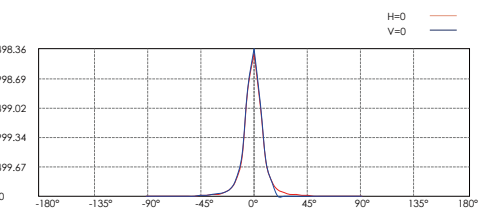

Lux distance Curve

Illuminance at a Distance			
Center Beam LUX	Beam Width V	Beam Width H	
2m 17602.81 LUX	0.5m	0.5m	
4m 4400.70 LUX	1.0m	1.0m	
6m 1955.87 LUX	1.4m	1.5m	
8m 1100.18 LUX	1.9m	2.0m	
10m 704.11 LUX	2.4m	2.5m	
12m 488.97 LUX	2.9m	3.0m	
Vert.Spread:13.8		Horiz.Spread:14.2	

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

CODE: BO-B8ELB0459-CL



SMALL (S)

CODE: BO-B3LA0366-CL



MEDIUM (S)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-B8ELB0459-CL-K30-KAP7037-CA3026

1. CHOOSE FIXTURE SIZE:

BO-B8ELB0459-CL SMALL

BO-B3LA0366-CL MEDIUM

2. CHOOSE CCT

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

4. BELVET CUT HOOD

CA3026



CA3027

