

CODE: BO-D7AL2832-WL



CODE: BO-D7AK1833-WL





CODE: BO-D7AJ0634-WL





4.72" (12 cm)

2.46" (6.25 cm)





4.72" (12 cm)

3.3" (8.4 cm)



4.72" (12 cm)

2.75" (7 cm)



LIGHT SOURCE:

28x0.1W

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

15 mA

CONSUMPTION:

3.5 W

LUMINANCE:

18 lm

CRI:

90

IK:

08

LIGHT SOURCE:

18x0.15W

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

27 mA

CONSUMPTION:

3.6 W

LUMINANCE:

157 lm

CRI:

90

IK:

08

LIGHT SOURCE:

6x0.5W

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

27 mA

CONSUMPTION:

3.4 W

LUMINANCE:

48 lm

CRI:

90

IK:

07



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	UVstop & Fireproof PC T=2.5mm
GASKET	Tooling shaped seal
DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C-40°C
CCT	3000K / 3500K / 4000K / 5000K / Custom on request*
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=0.3m

REGULAR PAINTING COLOR

Basic

Dark Grey
KAP 7037


Secondary

Silver Grey
KAP 9022

Sanded Black
RAL 9005

DIAGRAM OF INSTRUCTION

BO-D7AL2832-WL

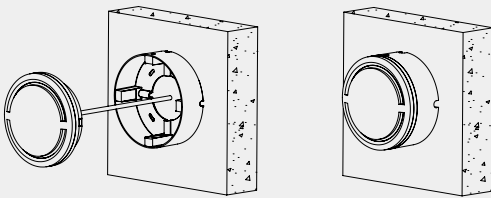

BEAM DEMO



BO-D7AL2832-WL



BO-D7AK1833-WL



BO-D7AJ0634-WL

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646





991 South Gull Lake Dr

Richland, MI 49083




USA

PHOTOMETRIC

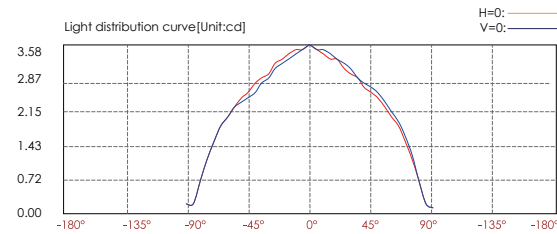



Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	0.90 LUX	8.9m	9.3m
4m	0.22 LUX	17.8m	18.5m
6m	0.10 LUX	26.7m	27.8m
8m	0.06 LUX	35.6m	37.0m
10m	0.04 LUX	44.5m	46.3m
12m	0.02 LUX	53.4m	55.5m
Ver.Spread:131.7		Horiz.Spread:133.3	

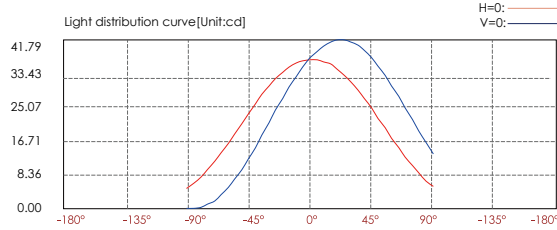

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	9.24 LUX	5.8m	5.5m
4m	2.31 LUX	11.5m	10.9m
6m	1.03 LUX	17.3m	16.4m
8m	0.58 LUX	23.1m	21.8m
10m	0.37 LUX	28.8m	27.3m
12m	0.26 LUX	34.6m	32.7m
Ver.Spread:110.5		Horiz.Spread:107.6	

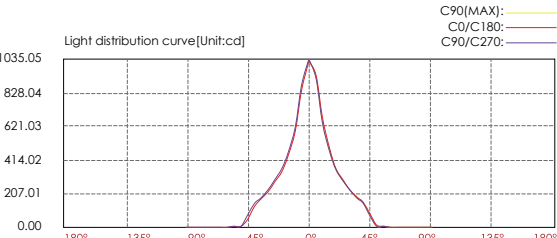

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	256.04 LUX	0.9m	0.9m
4m	64.01 LUX	1.9m	1.9m
6m	28.45 LUX	2.8m	2.8m
8m	16.00 LUX	3.8m	3.8m
10m	10.24 LUX	4.7m	4.7m
12m	7.11 LUX	5.7m	5.6m
Ver.Spread:26.5		Horiz.Spread:26.4	

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HOW TO ORDER:

CODE:

CODE: BO-D7AL2832-WL



CODE: BO-D7AK1833-WL



CODE: BO-D7AJ0634-WL



EXAMPLE:

BO-D7AL2832-WL-K30-KAP7037

1. CHOOSE FIXTURE MODEL:

BO-D7AL2832-WL

BO-D7AL2832-WL

BO-D7AK1833-WL

BO-D7AJ0634-WL

2. CHOOSE CCT:

K30 -	3000K
K35 -	3500K
K40 -	4000K
K50 -	5000K
CUS* -	Custom on request

3. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA