




CODES: BO-RB2CNR0126-IN / BO-RB2CNS0126-IN



Ø: 3.9" (10 cm)



3.9" (10 cm)



3.55"
(9 cm)

4.5"
(11.5 cm)

LIGHT SOURCE:

1 × 6W COB NICHIA

REFLECTOR:

R8

SELECTED DEEGRE

24°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

40 mA

CONSUMPTION:

8.5W

LUMINANCE:

CW=909 | WW=744

IK:

08

HOUSING

12# Die-casting aluminum grey powder coated

T=60-80µm. Adhesion of ISO class 1 / ASTM class 4B

Tempered step glass. T=4mm

Full area=2,463kgs

OPTICS Reflector efficiency ≥ 90%

Molding shaped silicone seal

90

3000K / 3500K / 4000K / 5000K / Custom on request

Constant Voltage Input, Constant Current Output

-20°C ~ 40°C

Outside of luminaire

110-277V" H05RN-F 3×1.0mm², L=0.5m

PC/ABS ALLOYS

Triac PWM, 1-10V, Dali, Customized

IP67

-20°C ~ 40°C

LIGHT WINDOW

GLASS PRESSURE CAPACITY

REFLECTOR

GASKET

CRI

CCT

LED DRIVER

OPERATING TEMPERATURE

POWER CABLE

RECESSED SLEEVE

DIMMING SUPPORT

IP

OPERATING TEMPERATURE

OPTICS

Referenced Degree(°)



R8

15°

24°

38°

60°

WATER PROOF SOLUTION



A Water-Stopper(Included)

A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector(Optional)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

SLEEVE (Included)

Option1

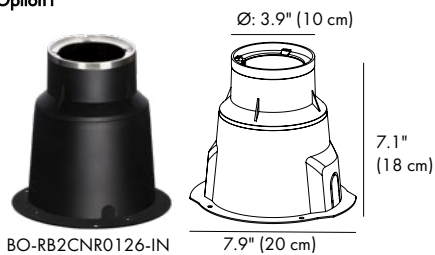

Option2




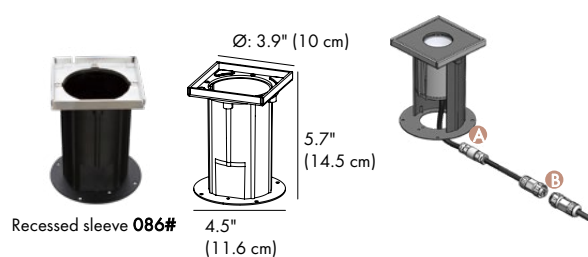




FIGURE A

Ground

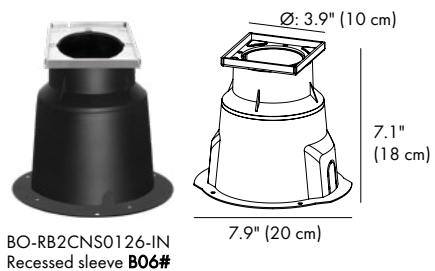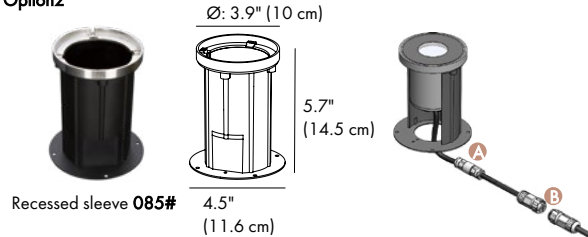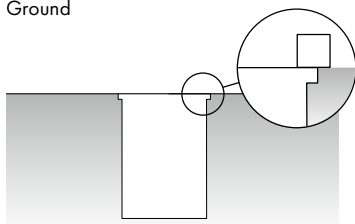

• After installation, the fixture's surface and the floor are on the same level.

PHOTOMETRIC

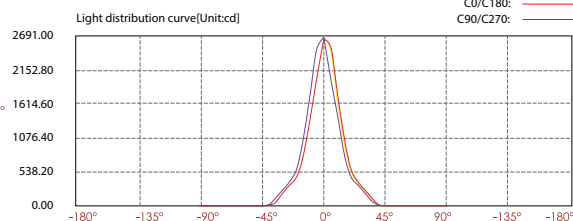

Lux distance cure

Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	659.59 LUX	0.8m	0.8m
4m	164.90 LUX	1.7m	1.6m
6m	73.29 LUX	2.5m	2.5m
8m	41.22 LUX	3.3m	3.3m
10m	26.38 LUX	4.2m	4.1m
12m	18.32 LUX	5.0m	4.9m

Ver.Spread:23.5 Horiz.Spread:23.2

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

HOW TO ORDER:

CODE:

CODE: BO-RB2CNR0126-IN



ROUND

CODE: BO-RB2CNS0126-IN



SQUARE

EXAMPLE:

BO-RB2CNR0126-IN-K30

BO-RB2CNR0126-IN

1.CHOOSE FIXTURE MODEL:

BO-RB2CNR0126-IN ROUND

BO-RB2CNS0126-IN SQUARE

2.CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request