



CODE: BO-D1HA1034-WL

CODE: BO-D1HB1034-WL

CODE: BO-D1HE1634-WL

CODE: BO-D1HC1634-WL



3.93" (10 cm)

3.3" (8.5 cm)

3.93" (10 cm)



3.3" (8.5 cm)

3.93" (10 cm)


3.3" (8.5 cm)

3.93" (10 cm)


3.3" (8.5 cm)





3.93"
(10 cm)



3.93"
(10 cm)



3.93"
(10 cm)



3.93"
(10 cm)

LIGHT SOURCE:

10 × 0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

60 mA

CONSUMPTION:

6.5W

LUMINANCE:

CW=124.6 | WW=112.9

IK:

07

LIGHT SOURCE:

10×0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

60 mA

CONSUMPTION:

6.5W

LUMINANCE:

CW=130 | WW=123

IK:

07

LIGHT SOURCE:

16 × 0.2W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

34 mA

CONSUMPTION:

3.8W

LUMINANCE:

CW=50 | WW=45

IK:

06

LIGHT SOURCE:

16 × 0.2W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

34 mA

CONSUMPTION:

3.8W

LUMINANCE:

CW=35 | WW=32

IK:

06

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

FRONT COVER	BO-D1HA1034-WL / BO-D1HB1034-WL: 12# Die-casting aluminum KAP7037 powder coated. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B BO-D1HE1634-WL / BO-D1HC1634-WL: Hard chromeplated Stainless steel 316#
HOUSING	12# Die-casting RAL9005 powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	UVstop & Fireproof PC
CABLE GLAND	IP67 copper and nicked coated
GASKET	Molding shaped silicone seal
RECESSED SLEEVE	PC/ABS ALLOYS 092#
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire DC power: H05RN-F 3×1.0mm², L=0.5m(120V/240V)
LED	SMD3030
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized

REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

RECESSED SLEEVE (Included)



092#


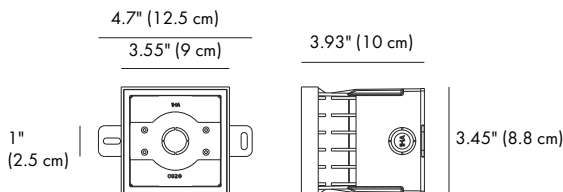


DIAGRAM OF INSTRUCTION



FEATURES

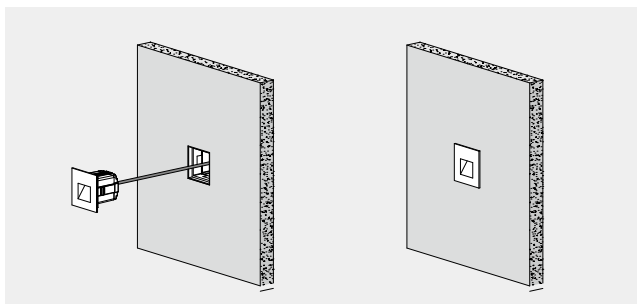

- Front cover without screws



- Use the high-strength clips for installation and fixation. (please refer remark ①)



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646





991 South Gull Lake Dr

Richland, MI 49083



USA

PHOTOMETRIC

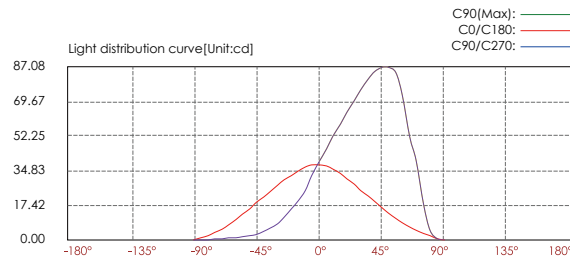



Lux distance cure

Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	9.48 LUX	2.6m	3.3m
4m	2.37 LUX	5.1m	6.5m
6m	1.05 LUX	7.7m	9.8m
8m	0.59 LUX	10.2m	13.1m
10m	0.38 LUX	12.8m	16.3m
12m	0.26 LUX	15.4m	19.6m
Ver.Spread: 65.3		Horiz.Spread: 78.6	

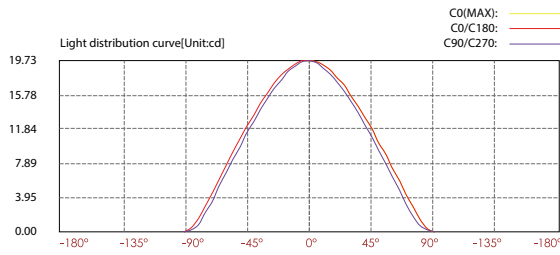

Lux distance cure


Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	4.93 LUX	4.60m	5.20m
4m	1.23 LUX	9.30m	10.3m
6m	0.55 LUX	13.9m	15.5m
8m	0.31 LUX	18.5m	20.6m
10m	0.20 LUX	23.2m	25.8m
12m	0.14 LUX	27.8m	30.9m
Ver.Spread:98.4		Horiz.Spread:104.4	

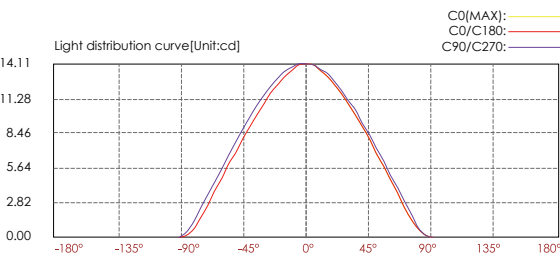


Lux distance cure

Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	3.53 LUX	5.10m	4.60m
4m	0.88 LUX	10.3m	9.30m
6m	0.39 LUX	15.4m	13.9m
8m	0.22 LUX	20.5m	18.5m
10m	0.14 LUX	25.7m	23.2m
12m	0.10 LUX	30.8m	27.8m
Ver.Spread:104.2		Horiz.Spread:98.4	


CODE: BO-D1HA1034-WL

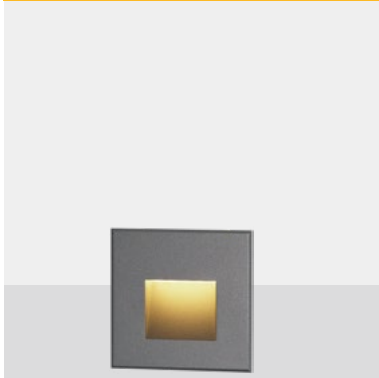


CODE: BO-D1HB1034-WL

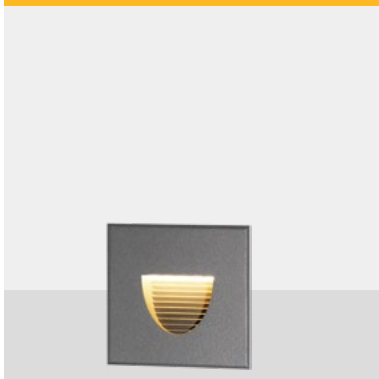

CODE: BO-D1HE1634-WL

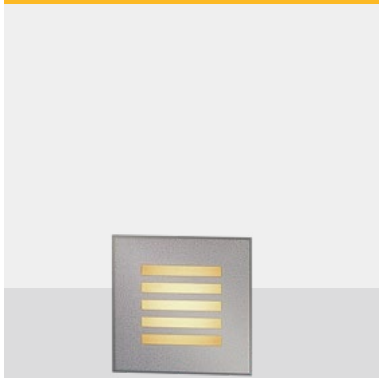

CODE: BO-D1HC1634-WL

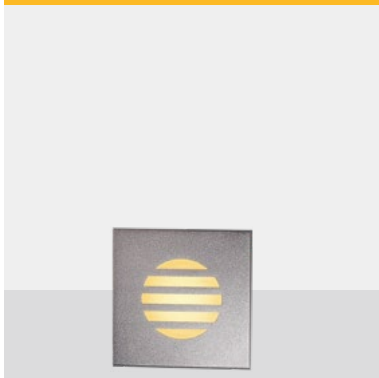

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D1HA1034-WL-BKAP 7037

BO-D1HA1034-
WL-BKAP 7037

1. CHOOSE FIXTURE SIZE:

BO-D1HA1034-WL

BO-D1HB1034-WL

BO-D1HE1634-WL

BO-D1HC1634-WL

2. BODY FINISH OPTIONS:



-BKAP 7037

Dark Grey



-RAL 9023

Silver Grey



-RAL 9005

Sanded Black

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA