

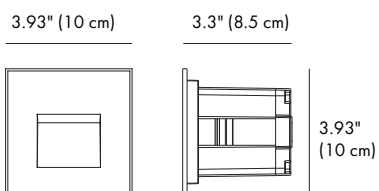
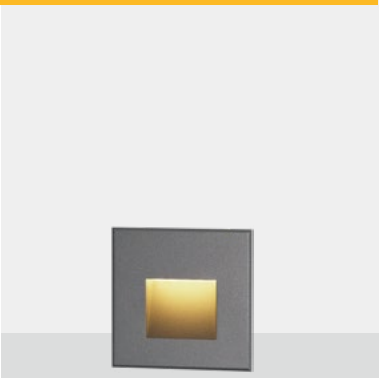




CODE: BO-D1HA1034-WL

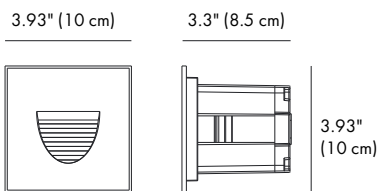



CODE: BO-D1HB1034-WL

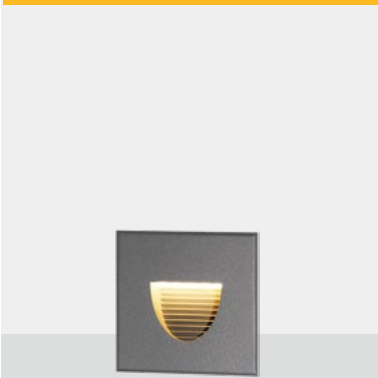

CODE: BO-D1HE1634-WL

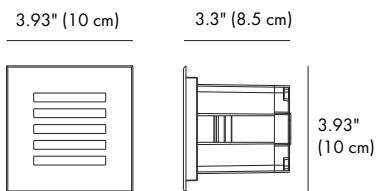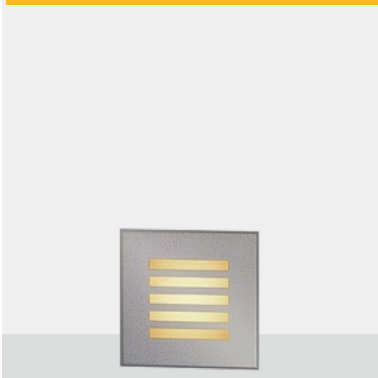

CODE: BO-D1HC1634-WL

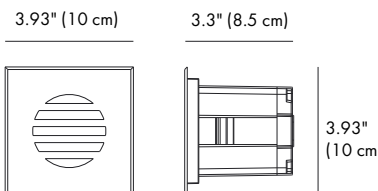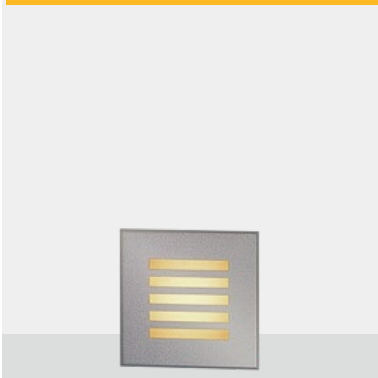

LIGHT SOURCE:
10 × 0.5W NICHIA

INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
60 mA

CONSUMPTION:
6.5W

LUMINANCE:
CW=124.6 | WW=112.9

IK:
07

LIGHT SOURCE:
10×0.5W NICHIA

INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
60 mA

CONSUMPTION:
6.5W

LUMINANCE:
CW=130 | WW=123

IK:
07

LIGHT SOURCE:
16 × 0.2W NICHIA

INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
34 mA

CONSUMPTION:
3.8W

LUMINANCE:
CW=50 | WW=45

IK:
06

LIGHT SOURCE:
16 × 0.2W NICHIA

INPUT VOLTAGE:
110-277V

OPERATING CURRENT:
34 mA

CONSUMPTION:
3.8W

LUMINANCE:
CW=35 | WW=32

IK:
06

LIGHTING INFORMATION

FRONT COVER	BO-D1HA1034-WL / BO-D1HB1034-WL: 12# Die-casting aluminum KAP7037 powder coated. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B BO-D1HE1634-WL / BO-D1HC1634-WL: Hard chromeplated Stainless steel 316#
HOUSING	12# Die-casting RAL9005 powder coated aluminum. T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	UVstop & Fireproof PC
CABLE GLAND	IP67 copper and nicked coated
GASKET	Molding shaped silicone seal
RECESSED SLEEVE	PC/ABS ALLOYS 092#
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire DC power: H05RN-F 3×1.0mm², L=0.5m(120V/240V)
LED	SMD3030
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
DIMMING SUPPORT	Triac PWM Available, 1-10V, Dali, Customized

REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

RECESSED SLEEVE (Included)

092#


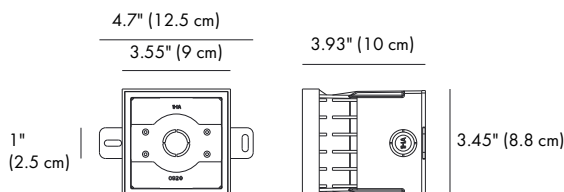


DIAGRAM OF INSTRUCTION



FEATURES

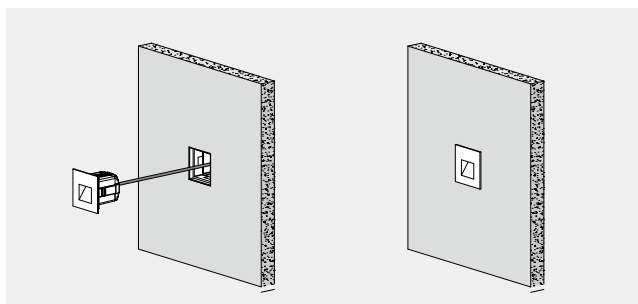

- Front cover without screws



- Use the high-strength clips for installation and ixation.(please refer remark ①)



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646





991 South Gull Lake Dr

Richland, MI 49083



USA

PHOTOMETRIC

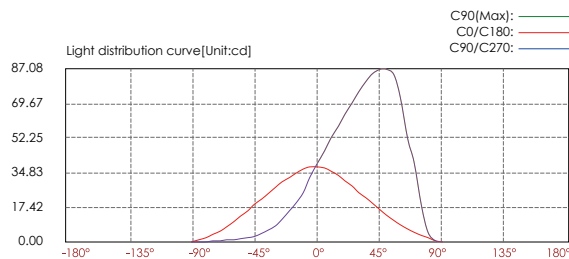



Lux distance cure

Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	9.48 LUX	2.6m	3.3m
4m	2.37 LUX	5.1m	6.5m
6m	1.05 LUX	7.7m	9.8m
8m	0.59 LUX	10.2m	13.1m
10m	0.38 LUX	12.8m	16.3m
12m	0.26 LUX	15.4m	19.6m
Ver.Spread: 65.3		Horiz.Spread: 78.6	

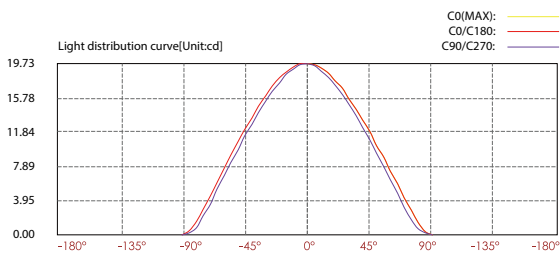

Lux distance cure

Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	4.93 LUX	4.60m	5.20m
4m	1.23 LUX	9.30m	10.3m
6m	0.55 LUX	13.9m	15.5m
8m	0.31 LUX	18.5m	20.6m
10m	0.20 LUX	23.2m	25.8m
12m	0.14 LUX	27.8m	30.9m
Ver.Spread:98.4		Horiz.Spread:104.4	

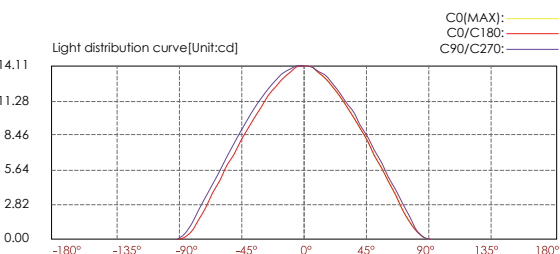


Lux distance cure


Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	3.53 LUX	5.10m	4.60m
4m	0.88 LUX	10.3m	9.30m
6m	0.39 LUX	15.4m	13.9m
8m	0.22 LUX	20.5m	18.5m
10m	0.14 LUX	25.7m	23.2m
12m	0.10 LUX	30.8m	27.8m
Ver.Spread:104.2		Horiz.Spread:98.4	

BLAZE COLLECTION

CODE: BO-D1HA1034-WL

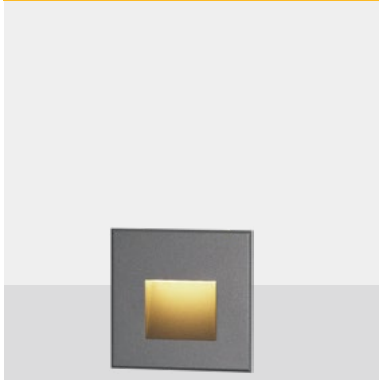


CODE: BO-D1HB1034-WL

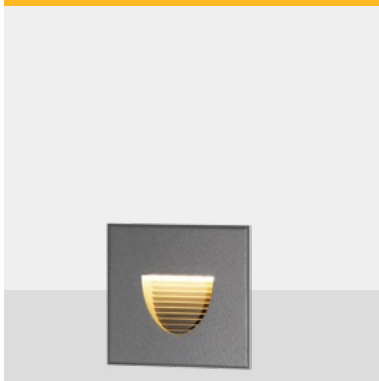

CODE: BO-D1HE1634-WL



CODE: BO-D1HC1634-WL

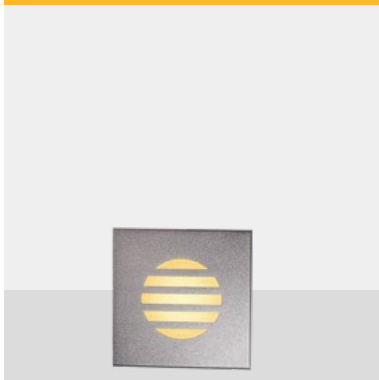

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D1HA1034-WL-BKAP 7037-K30-092#

BO-D1HA1034-WL-
BKAP 7037-
K30-092#

1. CHOOSE FIXTURE MODEL:

BO-D1HA1034-WL

BO-D1HB1034-WL

BO-D1HE1634-WL

BO-D1HC1634-WL

2. BODY FINISH OPTIONS:

-BKAP 7037



Dark Grey

-RAL 9023



Silver Grey

-RAL 9005



Sanded Black

3. CHOOSE CCT

-K30

3000K

-K35

3500K

-K40

4000K

-K50

5000K

-CUS*

Custom on request

4. RECESSED SLEEVE (Included)

-092#



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2023 All Rights Reserved

Updated 28/02/24

01/20/24