


CODE: BO-D7CY0934-WL

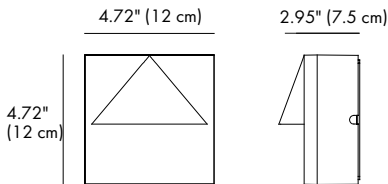

LIGHT SOURCE:

9×0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

46 mA

CONSUMPTION:

6.3 W

LUMINANCE:

199 lm


CRI:

90

IK:

07

CODE: BO-D7CX0934-WL

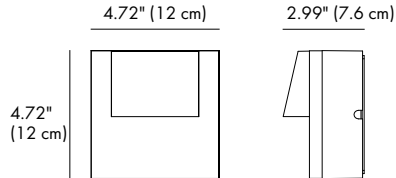

LIGHT SOURCE:

9×0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

46 mA

CONSUMPTION:

6.3 W

LUMINANCE:

142 lm


CRI:

90

IK:

07

CODE: BO-D7CZ0934-WL

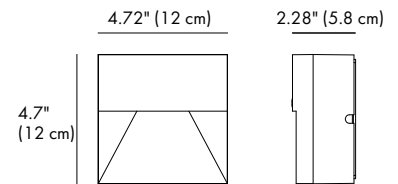

LIGHT SOURCE:

9×0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

46 mA

CONSUMPTION:

6.3 W

LUMINANCE:

158 lm

CRI:



90

IK:

07



CODE: BO-D7CN1434-WL

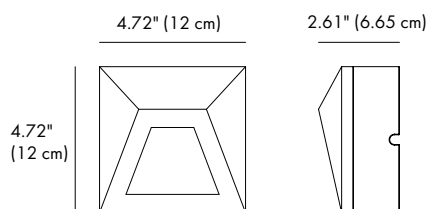

LIGHT SOURCE:

14×0.5W EDISON

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

32 mA

CONSUMPTION:

7.5 W

LUMINANCE:

112 lm


CRI:

90

IK:

10

CODE: BO-D7CW2832-WL

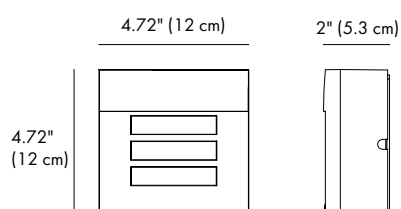

LIGHT SOURCE:

28×0.08W EDISON

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

16 mA

CONSUMPTION:

2.5 W

LUMINANCE:

84 lm

CRI:

90

IK:

05

LIGHTING INFORMATION


HOUSING&FRONT COVER	12# Die-casting aluminum finishing or powder painting T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	BO-D7CY0934-WL / BO-D7CX0934-WL / BO-D7CZ0934-WL / BO-D7CN1434: Glass=2mm BO-D7CW2832-WL: UVstop & Fireproof PC=3mm
MOUNTING SLEEVE	ADC12# 151#
LED DRIVER	Constant voltage input, constant current output
OPERATING TEMPERATURE	-20°C-40°C
CCT	3000K / 3500K / 4000K / 5000K / Custom on request*
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.3m
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized

REGULAR PAINTING COLOR

Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

DIAGRAM OF INSTRUCTION

BO-D7CY0934-WL

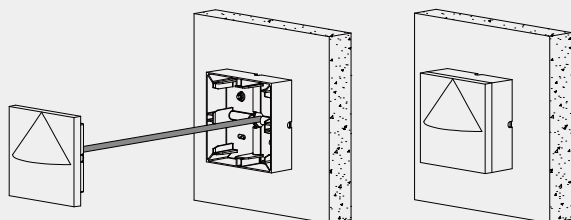

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646






991 South Gull Lake Dr

Richland, MI 49083

USA

PHOTOMETRIC

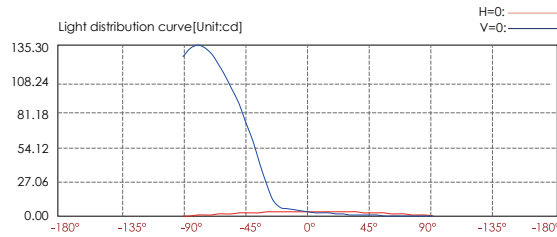




Lux distance cure

Beam width
V H

Center beam LUX	Beam width V	H
2m 0.86 LUX	4.9m	1.7m
4m 0.21 LUX	9.9m	3.4m
6m 0.10 LUX	14.8m	5.1m
8m 0.05 LUX	19.7m	6.8m
10m 0.03 LUX	24.6m	8.5m
12m 0.02 LUX	29.6m	10.2m

Ver.Spread:101.9 Horiz.Spread:46.0

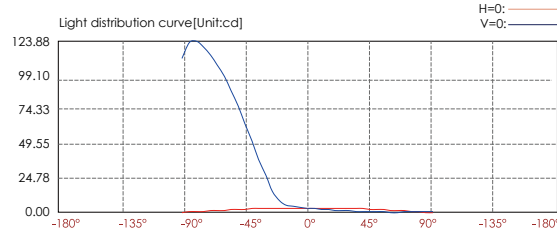



Lux distance cure

Beam width
V H

Center beam LUX	Beam width V	H
2m 0.86 LUX	4.8m	1.6m
4m 0.21 LUX	9.5m	3.3m
6m 0.10 LUX	14.3m	4.9m
8m 0.05 LUX	19.0m	6.6m
10m 0.03 LUX	23.8m	8.2m
12m 0.02 LUX	28.5m	9.9m

Ver.Spread:99.9 Horiz.Spread:44.7


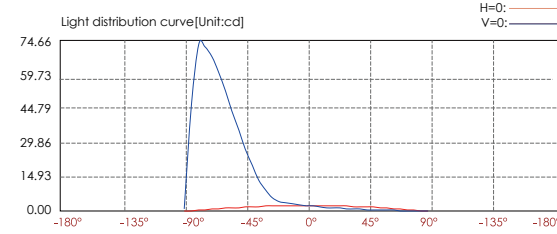



Lux distance cure

Beam width
V H

Center beam LUX	Beam width V	H
2m 0.62 LUX	3.2m	1.3m
4m 0.16 LUX	6.4m	2.6m
6m 0.07 LUX	9.6m	3.8m
8m 0.04 LUX	12.7m	5.1m
10m 0.02 LUX	15.9m	6.4m
12m 0.02 LUX	19.1m	7.7m

Ver.Spread:77.1 Horiz.Spread:35.5

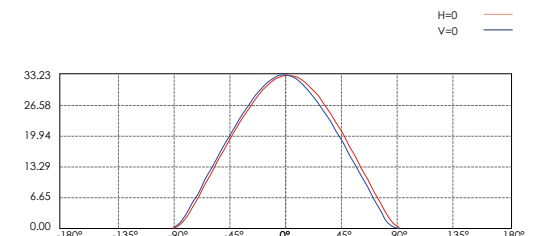

Lux distance Curve

Beam Width
V H

Center Beam LUX	Beam Width V	H
2m 7.11 LUX	5.1m	3.7m
4m 1.78 LUX	10.3m	7.5m
6m 0.79 LUX	15.4m	11.2m
8m 0.44 LUX	20.6m	15.0m
10m 0.28 LUX	25.7m	18.7m
12m 0.20 LUX	30.9m	22.4m

Vert.Spread:104.4 Horiz.Spread:86.2

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HOW TO ORDER:

CODE:

CODE: BO-D7CY0934-WL




CODE: BO-D7CX0934-WL



CODE: BO-D7CZ0934-WL



CODE: BO-D7CN1434-WL



CODE: BO-D7CW2832-WL



EXAMPLE:

BO-D7CY0934-WL-K30-KAP7037

BO-D7CY0934-WL

1. CHOOSE FIXTURE MODEL:

BO-D7CY0934-WL

BO-D7CX0934-WL

BO-D7CZ0934-WL

BO-D7CN1434-WL

BO-D7CW2832-WL

2. CHOOSE CCT:

K30 - 3000K

K35 - 3500K

K40 - 4000K

K50 - 5000K

CUS* - Custom on request

3. BODY FINISH OPTIONS:



-KAP 7037 Dark Grey



-KAP 9022 Silver Grey



-RAL 9005 Sanded Black

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA