

CODE:

BO-C7EMG0458-WL

LIGHT SOURCE:

4 × 3.5W

LENS:

C18

SELECTED DEGREE:

65°×55°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

56 mA

CONSUMPTION:


12.6W

LUMINANCE:

520 lm

IK:

06



CODE:

BO-C7FMG1057-WL

LIGHT SOURCE:

10 × 1.8W

LENS:

C18

SELECTED DEGREE:

85°×55°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

93 mA

CONSUMPTION:

21W

LUMINANCE:

680 lm

IK:

06



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA



LIGHTING INFORMATION

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered Glass. T=3mm
CABLE GLAND	IP68 PG-9 PA66
GASKET	Tooling shaped seal
LED	SMD 3535
LED DRIVER	Constant Voltage Input, Constant Current Output
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.3m
DIMMING	Triac PWM Available
SUPPORT	1-10V Dali Customized

REGULAR PAINTING COLOR

Basic

Dark Grey
KAP 7037

Secondary

Silver Grey
KAP 9022

Sanded Black
RAL 9005

OPTICS


Referenced Degree(°)θ1/2




C18

L0180
60 F077YS

DIAGRAM OF INSTRUCTION

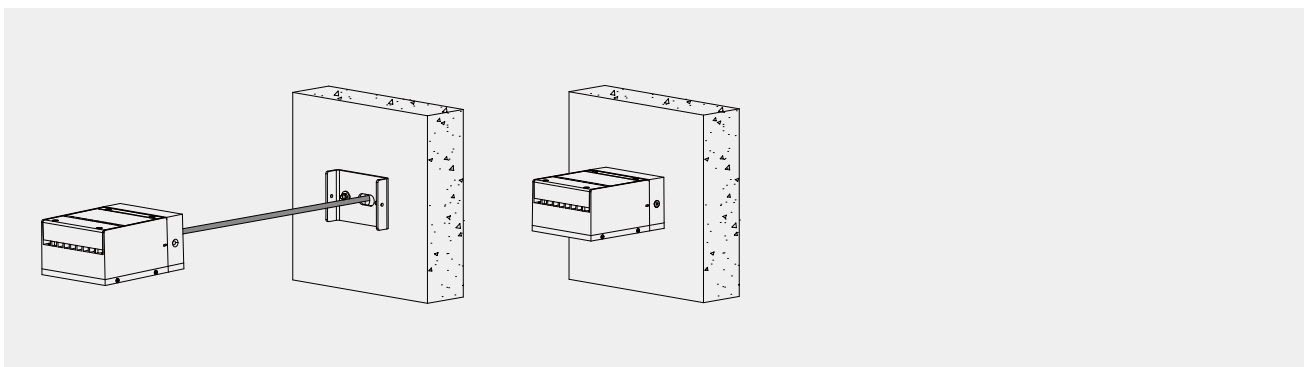

BEAM DEMO

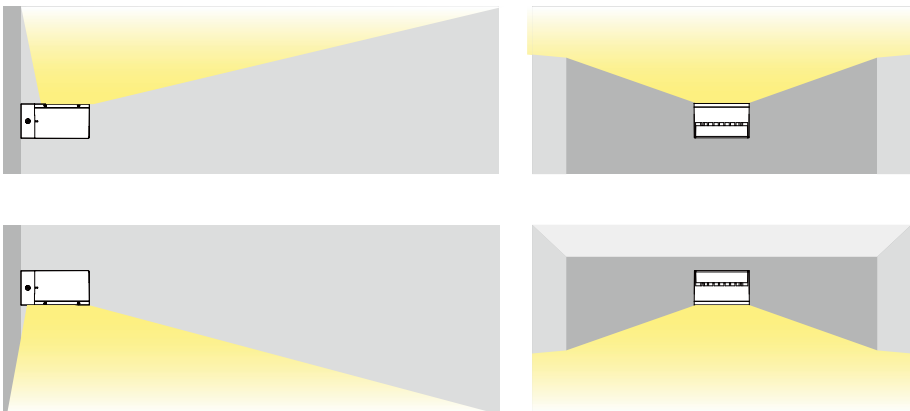

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr




Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.






PHOTOMETRIC

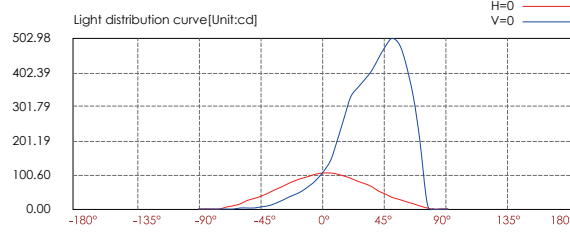

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	26.95 LUX	2.5m	2.1m
4m	6.74 LUX	5.0m	4.1m
6m	2.99 LUX	7.5m	6.2m
8m	1.68 LUX	9.9m	8.3m
10m	1.08 LUX	12.4m	10.3m
12m	0.75 LUX	14.9m	12.4m
Ver.Spread: 63.7		Horiz.Spread: 54.7	

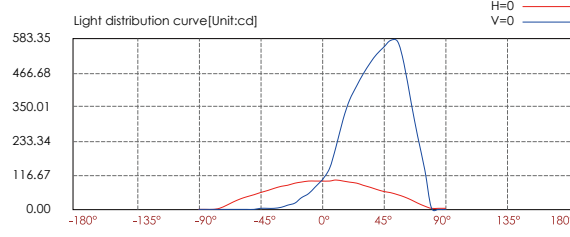

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width		
	V	H	
2m	24.40 LUX	2.7m	2.0m
4m	6.10 LUX	5.3m	4.1m
6m	2.71 LUX	8.0m	6.1m
8m	1.53 LUX	10.6m	8.2m
10m	0.98 LUX	13.3m	10.2m
12m	0.68 LUX	16.0m	12.3m
Ver.Spread: 67.3		Horiz.Spread: 54.3	



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA