




CODE: BO-B2CAR0158-IN

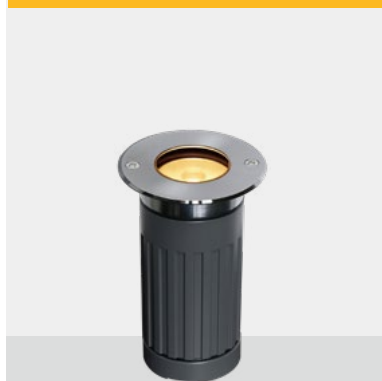


Ø: 2.55" (6.5 cm)

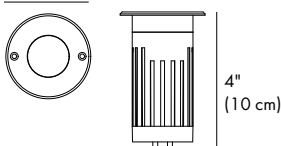

CODE: BO-B2CAS0158-IN

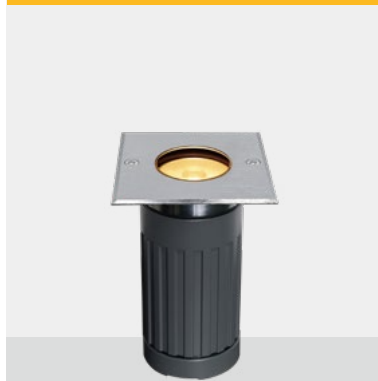

L/W: 2.55" (6.5 cm)

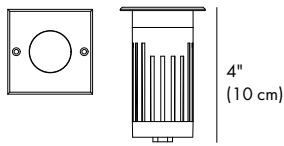

## LIGHT SOURCE:

1 × 3W

## LENS:

B73

## SELECTED DEGREE:

30°

## INPUT VOLTAGE:

110-277V

## OPERATING CURRENT:

26 mA

## CONSUMPTION:

5.4 W

## LUMINANCE:

CW=305 WW=267

## LIGHT SOURCE:

1 × 3W

## LENS:

B73

## SELECTED DEGREE:

30°

## INPUT VOLTAGE:

110-277V

## OPERATING CURRENT:

26 mA


## CONSUMPTION:

5.4 W

## LUMINANCE:

CW=305 WW=267

## WATER PROOF SOLUTION

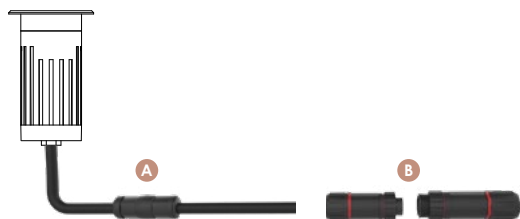

### A Water-Stopper(Included)

A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

### IP67 Jiffy quick plug/socket connector(Optional)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FRONT COVER	316# stainless steel forged molding with hard chromeplated
HOUSING	1070# grey powder coated aluminum forged molding T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered step glass.T=5mm
GASKET	Silicon rubber molding shaped seal
POWER CABLE	Outside of luminaire 110-0277V: H05RN-F 3×1.0mm <sup>2</sup> , L=0.5m
CABLE GLAND	IP67 Copper and nicked coated
LED TYPE	Nichia
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
LED DRIVER	Constant Voltage Input, Constant Current Output
LENS	OPTICS Reflector efficiency≥90%
RECESSED SLEEVE MATERIAL	PC/ABS ALLOYS
GLASS PRESSURE CAPACITY	Full area=783kgs
DIMMING SUPPORT	Triac PWM, 1-10V,Dali , Customized
IP	IP67
IK	08
OPERATING TEMPERATURE	-20° C~40° C


## OPTICS

Referenced Degree(°)θ1/2


	B33	9°	15°	20°	45°	60°
	B73	30°				

## SLEEVE (Included)

### Option1

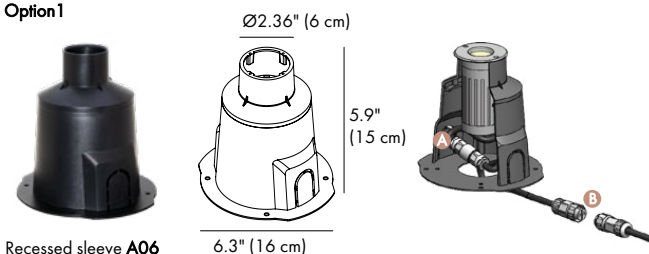

### Option2

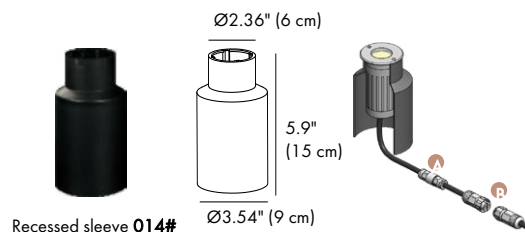

## HONEYCOMB LOUVER (Option)






Louver **Mh014**



Optional Accessory Honeycomb Louver.

The measured luminous flux data does not contain the honeycomb, and the data containing is reduced 20 to 30%.

## PHOTOMETRIC

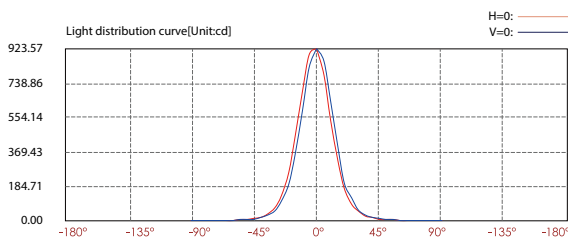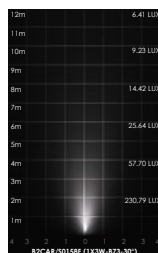

Lux distance curve

Center beam LUX	Beam width V	Beam width H
2m: 230.79 LUX	0.9m	0.9m
4m: 57.70 LUX	1.9m	1.9m
6m: 25.64 LUX	2.8m	2.8m
8m: 14.42 LUX	3.8m	3.8m
10m: 9.23 LUX	4.7m	4.7m
12m: 6.41 LUX	5.7m	5.6m

Ver.Spread:26.7 Horiz.Spread:26.5

sales@gordonbullarda.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

# DORS

## HOW TO ORDER:

## CODE:

CODE: BO-B2CAR0158-IN



CODE: BO-B2CAS0158-IN



### EXAMPLE:

BO-B2CAR0158-IN-K30-DIM-Mh015

BO-B2CAR0158-IN

## 1. CHOOSE FIXTURE MODEL:

BO-B2CAR0158-IN      ROUND

BO-B2CAS0158-IN      SQUARE

## 2. CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

## 3. DIMMING OPTIONS:

PWM -	Triac PWM
DIM -	1-10V
DALI -	DALI
CUS* -	Custom on request

## 3. HONEYCOMB LOUVER: (optional)

-Mh014 

