




CODE: BO-B4UB0657-UL

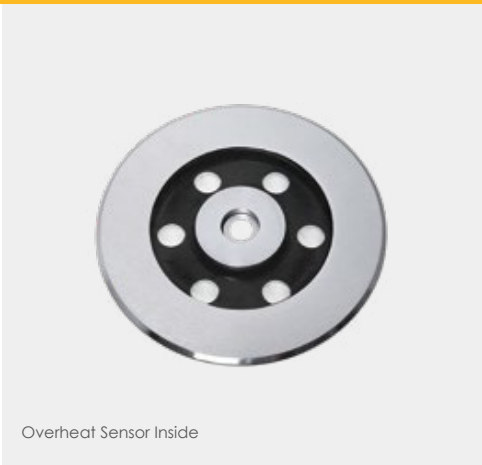

Ø: 4.7" (12 cm)

2.55" (6.5 cm)

Ø: 0.62" (1.6 cm)



## LIGHT SOURCE:

6 x 1.5W

## LENS:

B15

## SELECTED DEEGRE

20°

## INPUT VOLTAGE:

110-277V

## OPERATING CURRENT:

500 mA

## CONSUMPTION:

12W

## LUMINANCE:

825

## FRONT COVER & HOUSING LIGHT

Hard chromeplated molding shaped stainless steel SUS 316#

## WINDOW

Step tempered glass. T=8mm

## CABLE GLAND

IP68 PG-13.5 copper with nickel-coated

## GASKET

Silicone gasket

## CCT

3000K / 3500K / 4000K / 5000K / Custom on request

## CRI

90

## PCB

Excellent heat conductivity aluminum.coefficient of heat Conductivity≥2.0w/mk

## LED DRIVER

Constant Voltage Input,Constant Current Output

## OPERATING TEMPERATURE BUILT-

Temperature of water between -20°C~40°C less than 1 meter depth

## IN OVERHEAT SENSOR SYSTEM

Automatic Shutdown at 75°C

## POWER CABLE OPTIONAL

Outside of luminaire H07RN-F 2×1.0mm<sup>2</sup> with water-stopper, L=1m, 3m, 5m

## DIMMING SUPPORT

Triac PWM, 1-10V,Dali ,Customized

## OPTICS

Referenced Degree(°)



B15

10°

15°

20°

30°

## WATER PROOF SOLUTION



A

### Water-Stopper(Included)

A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B

### IP68 Jiffy quick plug/socket connector(Optional)

A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

IP68  
OUTDOOR  
RATED



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

## DETAILED VIEW






Central Ejective



Water jet pipe G3/4"taper



## PHOTOMETRIC

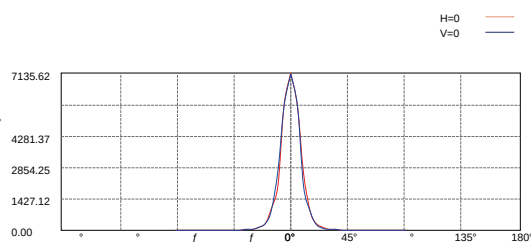

Lux distance Curve

| Illuminance at a Distance<br>& H Q W H U %04BD P / 8 eam Width |     |      |      |  |  |
|----------------------------------------------------------------|-----|------|------|--|--|
| 2m                                                             | /06 | 0.6m | 0.6m |  |  |
| 4m                                                             | /06 | 1.1m | 1.2m |  |  |
| 6m                                                             | /06 | 1.7m | 1.7m |  |  |
| 8m                                                             | /02 | .3m  | 2.3m |  |  |
| 10m                                                            | /02 | P    | P    |  |  |
| 12m                                                            | /03 | .4m  | 3.5m |  |  |

Vert.Spread:16.4H oriz.Spread:16.5

## HOW TO ORDER:

## CODE:

CODE: BO-B4UB0657-UL

### EXAMPLE:

BO-B4UB0657-UL-K30-DIM-A-B

BO-B4UB0657-  
UL-K30-DIM-A-B

## 1. CHOOSE FIXTURE MODEL:

BO-B4UB0657-UL

## 2. CHOOSE CCT:

|       |                   |
|-------|-------------------|
| -K30  | 3000K             |
| -K35  | 3500K             |
| -K40  | 4000K             |
| -K50  | 5000K             |
| -CUS* | Custom on request |

## 3. DIMMING OPTIONS:

|       |                   |
|-------|-------------------|
| -PWM  | Triac PWM         |
| -DIM  | 1-10V             |
| -DALI | DALI              |
| -CUS* | Custom on request |

## 4. WATER PROOF SOLUTION (included):

- A Water-Stopper (Included)**  
IP-68 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.



## HOW TO ORDER:

## CODE:

CODE: BO-B4UB0657-UL

### EXAMPLE:

BO-B4UB0657-UL-K30-DIM-A-B

BO-B4UB0657-  
UL-K30-DIM-A-B

## 5. WATER PROOF SOLUTION (optional):

- B **IP68 Jiffy quick plug/socket connector (Option)**  
A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

