



CODE: BO-B6JD0656-WL

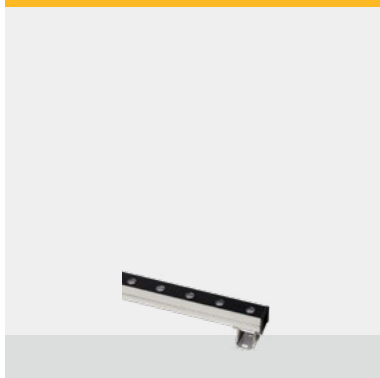


SMALL (S)

CODE: BO-B6JD1256-WL



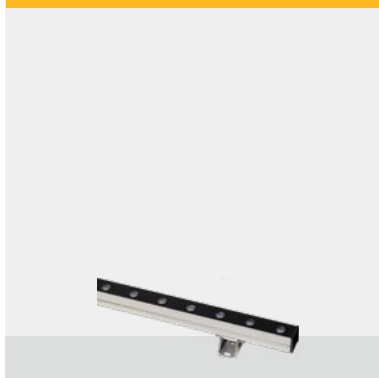


MEDIUM (M)

CODE: BO-B6JD2456-WL

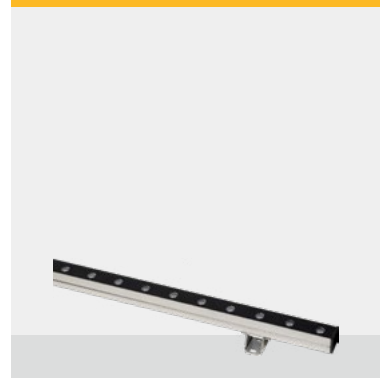

LARGE (M)

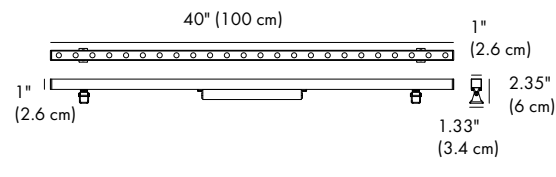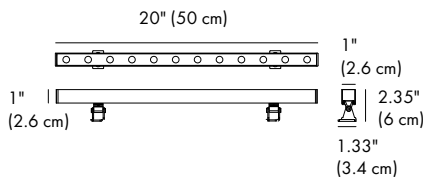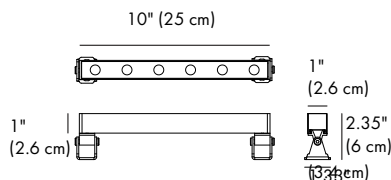

LIGHT SOURCE:

6 × 1W

LENS:

B38

SELECTED DEGREE:

30°(B38/30°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

30 mA

CONSUMPTION:

6.5W

LUMINANCE:

CW=540 | WW=432

IK:

02

LIGHT SOURCE:

12 × 1W

LENS:

B38

SELECTED DEGREE:

30°(B38/30°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

65 mA

CONSUMPTION:

15W

LUMINANCE:

CW=1080 | WW=864

IK:

02

LIGHT SOURCE:

24 × 1W

LENS:

B38

SELECTED DEGREE:

30°(B38/30°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

135 mA

CONSUMPTION:

31.5W


LUMINANCE:

CW=2140 | WW=1976

IK:

02

WATER PROOF SOLUTION



B IP67 Jiffy quick plug/socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

C High voltage driver IP65



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING	Extruded aluminum anodized finishing
BRACKET	Aluminum anodized finishing
LIGHT WINDOW	Tempered glass.T=2mm
GASKET	Glass and housing are silicone sealed
LENS	OPTICS lens efficiency≥85%
LED	Single color ORSAM LED
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire H05RN-F 3×1.0mm², L=0.5m 110-277V
DIMMING SUPPORT	Triac PWM Available, 1-10V, Dali, Customized

OPTICS:



B38

30°


40°

50°


60°

25°×50°

ANTI GLARE LOUVER(Optional)

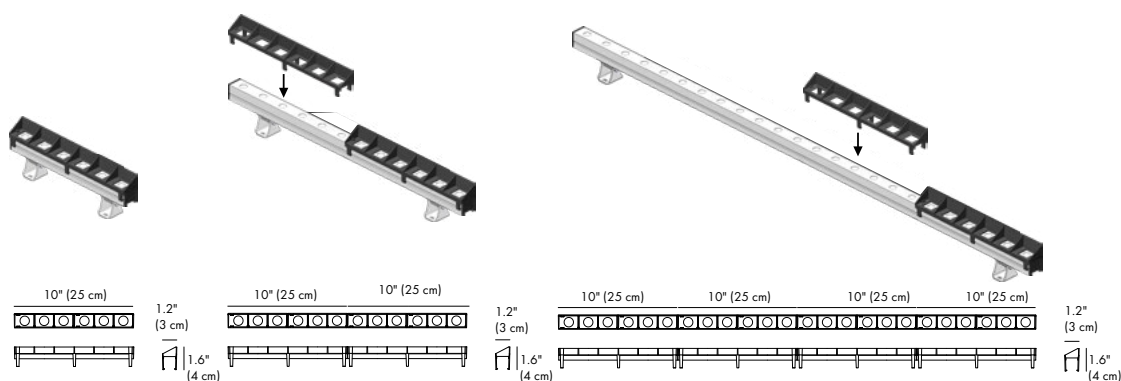

HIGH VOLTAGE INPUT (110V-277V) POWER CALBE WIRING TYPE

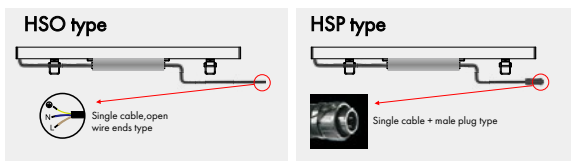

•High voltage input default: HSO type power cable, waterproof socket connector are not included(optional).




sales@gordonbullard.com
www.bullardoutdoor.com



991 South Gull Lake Dr
Richland, MI 49083
USA

1-877-964-4646 C




PHOTOMETRIC (Non anti glare louver)

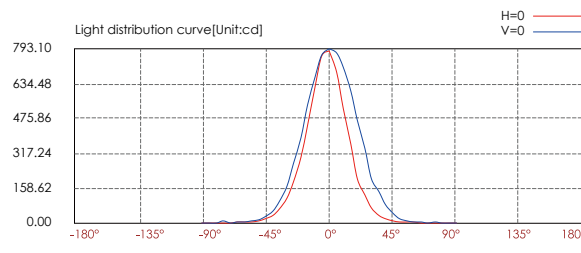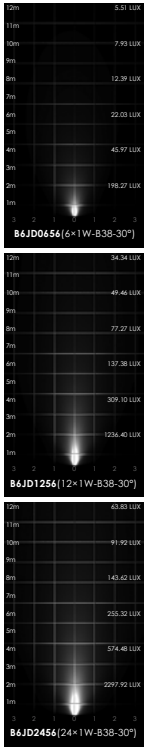

Lux distance cure

Distance (m)	Center beam LUX	Beam width V (m)	Beam width H (m)
2m	198.27 LUX	1.1m	1.6m
4m	49.57 LUX	2.2m	3.1m
6m	22.03 LUX	3.3m	4.7m
8m	12.39 LUX	4.4m	6.3m
10m	7.93 LUX	5.5m	7.8m
12m	5.51 LUX	6.6m	9.4m




Ver.Spread: 30.7 Horiz.Spread: 42.9

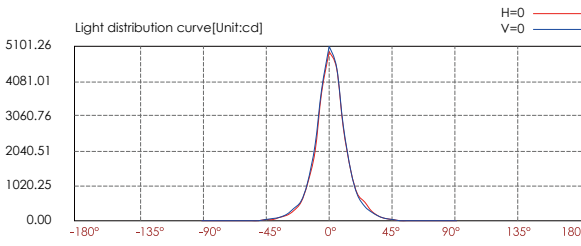

Lux distance cure

Distance (m)	Center beam LUX	Beam width V (m)	Beam width H (m)
2m	1236.40 LUX	0.7m	0.7m
4m	309.10 LUX	1.3m	1.4m
6m	137.38 LUX	2.0m	2.1m
8m	77.27 LUX	2.7m	2.8m
10m	49.46 LUX	3.4m	3.5m
12m	34.34 LUX	4.0m	4.2m

Ver.Spread: 19.1 Horiz.Spread: 19.8

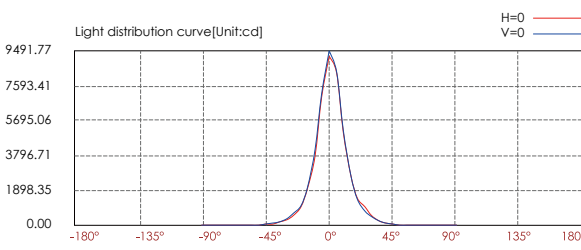

Lux distance cure

Distance (m)	Center beam LUX	Beam width V (m)	Beam width H (m)
2m	2297.92 LUX	0.7m	0.7m
4m	574.48 LUX	1.4m	1.4m
6m	255.32 LUX	2.1m	2.1m
8m	143.62 LUX	2.8m	2.8m
10m	91.92 LUX	3.5m	3.5m
12m	63.83 LUX	4.2m	4.2m

Ver.Spread: 20.0 Horiz.Spread: 20.0

GLINT COLLECTION

CODE: BO-B6JD0656-WL



(SMALL)

CODE: BO-B6JD1256-WL



(MEDIUM)

CODE: BO-B6JD2456-WL



(LARGE)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-B6JD0656-WL-K30-C-6004#

BO-B6JD0656-WL-
K30-C-6004#

1.CHOOSE FIXTURE SIZE:


BO-B6JD0656-WL	SMALL
BO-B6JD1256-WL	MEDIUM
BO-B6JD2456-WL	LARGE

2.CHOOSE CCT

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request


3.WATER PROOF SOLUTIONS: (included)

-C



4.WATER PROOF SOLUTIONS: (optional)

-B



5.ANTI GLARE LOUVER (Optional)

-6004#



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA