




CODE: BO-B7DH0224-WL



SMALL (S)

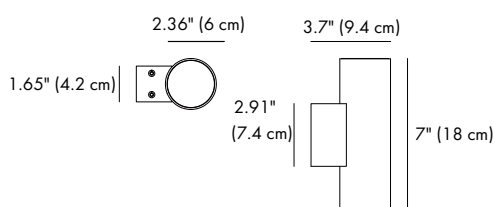

LIGHT SOURCE:

2×4.5W COB NICHIA

LENS:

B54

SELECTED DEGREE:

24°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

49 mA

CONSUMPTION:

10.7 W

LUMINANCE:

WW=282×2 lm

CRI:

90


IK:

05

CODE: BO-R7AH0227-WL



MEDIUM (M)

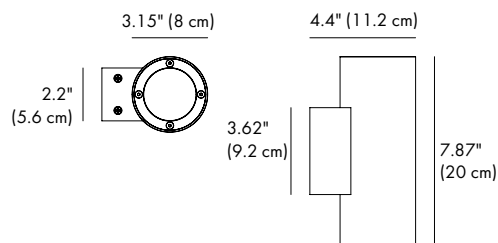

LIGHT SOURCE:

2×8W COB NICHIA

REFLECTOR:

R8

SELECTED DEGREE:

24°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

91 mA

CONSUMPTION:

20.8 W

LUMINANCE:

WW=986×2 lm

CRI:

90

IK:

10



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083


USA



CODE: BO-R7BH0229-WL



LARGE (L)

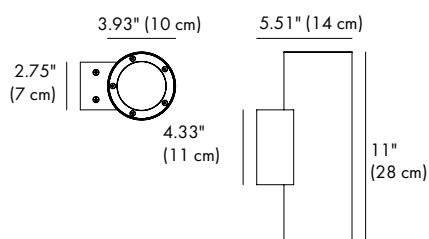

LIGHT SOURCE:

2×12W COB NICHIA

REFLECTOR:

R18

SELECTED DEGREE:

22°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

116 mA

CONSUMPTION:

25 W

LUMINANCE:

CW=1289×2 | WW=1079×2

CRI:

90


IK:

10

CODE: BO-R7CH0270-WL



EXTRA LARGE (XL)

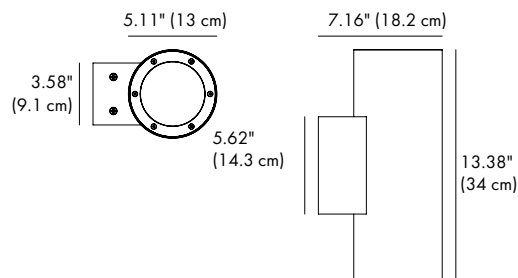

LIGHT SOURCE:

2×18W COB NICHIA

REFLECTOR:

R19

SELECTED DEGREE:

22°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

182 mA

CONSUMPTION:

42 W

LUMINANCE:

CW=2224×2 | WW=2036×2

CRI:

90

IK:

10

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING MATERIAL	Extruded aluminum alloy #6063
PAINTING	Powder coating ,T= 60-80 μm. Adhesion of ISOclass V1/ASTM class 4B
CCT	3000K / 3500K / 4000K / 5000K / Custom on request*
REFLECTOR	OPTICS reflector. efficiency≥85%
LED	NICHIA
OPERATING TEMPERATURE	-20°C- 40°C
POWER CABLE	Outside of luminaire 110-277V : H05RN-F 3×1.0mm ² , L=0.3m

REGULAR PAINTING COLOR


Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

OPTICS

Referenced Degree(°)θ1/2

	B54	15°	24°	38°	
	R8	15°	24°	38°	60°
	R18	12°	22°	35°	55°
	R19	10°	22°	38°	

DIAGRAM OF INSTRUCTION

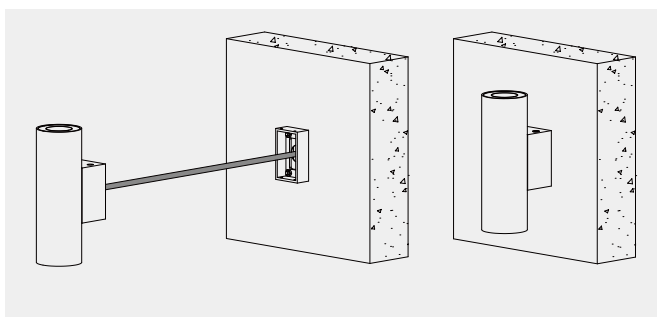

BEAM DEMO



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646






991 South Gull Lake Dr

Richland, MI 49083




USA

PHOTOMETRIC

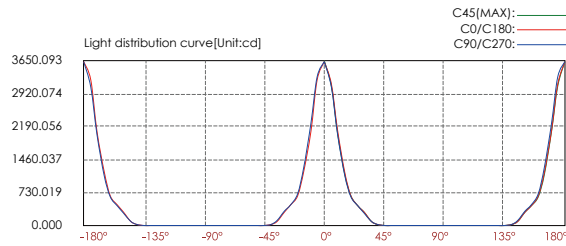




Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	907.54 LUX	0.8m	0.8m
4m	226.89 LUX	1.6m	1.7m
6m	100.84 LUX	2.5m	2.5m
8m	56.72 LUX	3.3m	3.3m
10m	36.30 LUX	4.1m	4.2m
12m	25.21 LUX	4.9m	5.0m
Vert.Spread:23.5		Horiz.Spread:23.1	

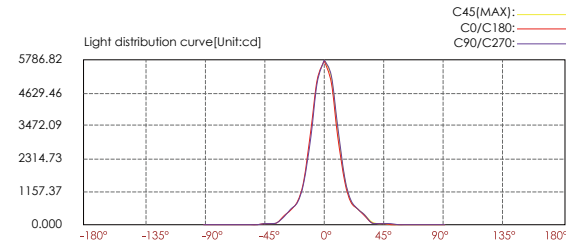

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	1433.55 LUX	0.8m	0.8m
4m	358.39 LUX	1.6m	1.6m
6m	159.28 LUX	2.4m	2.3m
8m	89.60 LUX	3.1m	3.1m
10m	57.34 LUX	3.9m	3.9m
12m	39.82 LUX	4.7m	4.7m
Vert.Spread:22.2		Horiz.Spread:22.0	

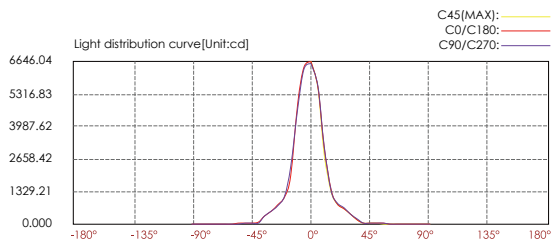

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	1659.74 LUX	0.8m	0.8m
4m	414.93 LUX	1.6m	1.6m
6m	184.42 LUX	2.5m	2.4m
8m	103.73 LUX	3.3m	3.1m
10m	66.39 LUX	4.1m	3.9m
12m	46.10 LUX	4.9m	4.7m
Vert.Spread:23.3		Horiz.Spread:22.2	

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HEL CURT COLLECTION

CODE: BO-B7DH0224-WL



SMALL (S)

CODE: BO-R7AH0227-WL



MEDIUM (M)

CODE: BO-R7BH0229-WL



LARGE (XL)

CODE: BO-R7CH0270-WL



EXTRA LARGE (XL)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-B7DH0224-WL-K30-KAP7037

BO-B7DH0224-WL

1. CHOOSE FIXTURE SIZE:

BO-B7DH0224-WL	SMALL
BO-R7AH0227-WL	MEDIUM
BO-R7BH0229-WL	LARGE
BO-R7CH0270-WL	EXTRA LARGE

2. CHOOSE CCT:

K30 -	3000K
K35 -	3500K
K40 -	4000K
K50 -	5000K
CUS* -	Custom on request

3. BODY FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA