




CODE: BO-D1CY0934-WL

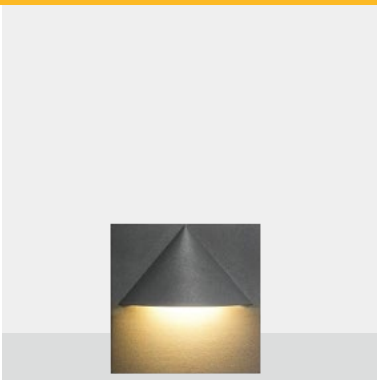

CODE: BO-D1CX0934-WL


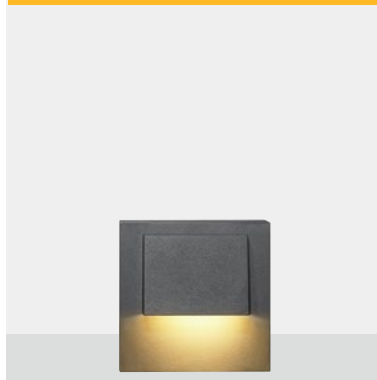


CODE: BO-D1CZ0934-WL

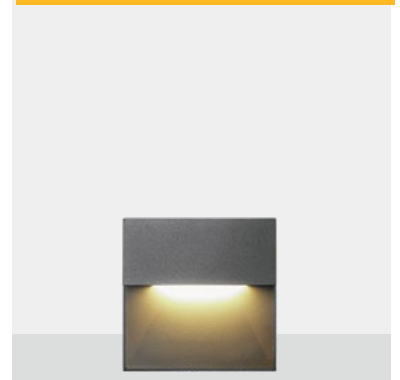

4.7" (12 cm)



2.35" (6 cm)



4.7"
(12 cm)

4.7" (12 cm)



2.25" (5.7 cm)



4.7"
(12 cm)

4.7" (12 cm)

1.7" (4.3 cm)



4.7"
(12 cm)

LIGHT SOURCE:

9 × 0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

46 mA

CONSUMPTION:

6.3W

LUMINANCE:

199 lm

IK:

07

LIGHT SOURCE:

9 × 0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

46 mA

CONSUMPTION:

6.3W

LUMINANCE:

172 lm

IK:

07

LIGHT SOURCE:

9 × 0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

46 mA

CONSUMPTION:

6.3W

LUMINANCE:

158 lm

IK:

06

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr


Richland, MI 49083

USA


CODE: BO-D1CN1434-WL

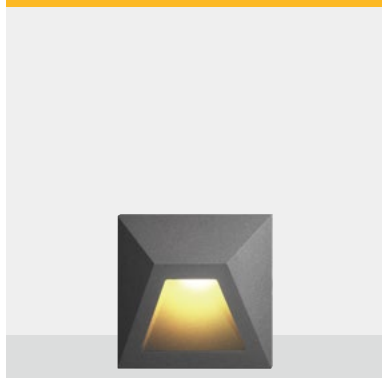


CODE: BO-D1CW2832-WL

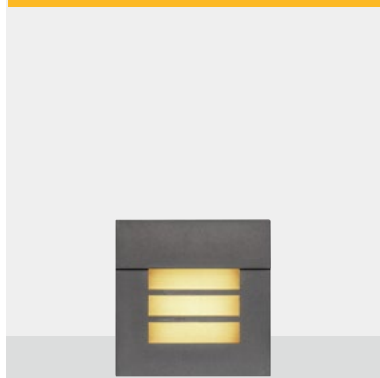

4.7" (12 cm)




2.1" (5.3 cm)




4.7"
(12 cm)

4.7" (12 cm)



1.45" (3.7 cm)



4.7"
(12 cm)

LIGHT SOURCE:

14 × 0.5W

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

32 mA

CONSUMPTION:

7.5W

LUMINANCE:

112 lm

IK:

05

LIGHT SOURCE:

28 × 0.08W

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

16 mA

CONSUMPTION:

2.5W

LUMINANCE:

84 lm

IK:

10

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING	12# Die-casting dark grey powder coated aluminum T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	UVstop & Fireproof PC: BO-D1CW2832-WL Glass: BO-D1CY0934-WL, BO-D1CX0934-WL, BO-D1CZ0934-WL, BO-D1CN1434-WL
CABLE GLAND	IP66
GASKET	Tooling shaped seal
RECESSED SLEEVE	PC/ABS ALLOYS 150#
LED DRIVER	Constant Voltage Input, Constant Current Output
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire DC power: H05RN-F 3×1.0mm², L=0.3m 110-277V
DIMMING SUPPORT	Triac PWM Available, 1-10V, Dali, Customized

REGULAR PAINTING COLOR

Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

RECESSED SLEEVE (Included)



150#


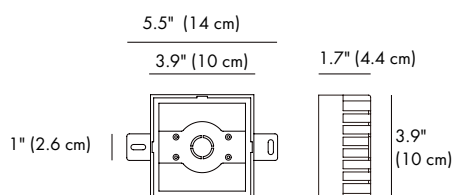


DIAGRAM OF INSTRUCTION



FEATURES

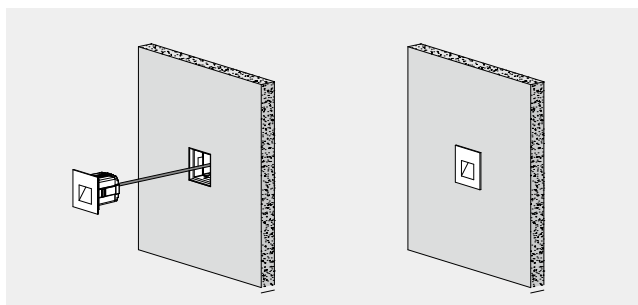

- Front cover without screws



- Use the high-strength clips for installation and ixation.
(please refer remark **1** & **2**)

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646






991 South Gull Lake Dr

Richland, MI 49083

USA

PHOTOMETRIC

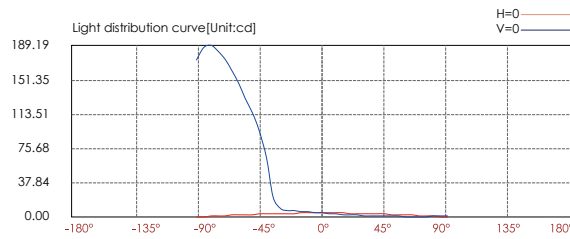

Light distribution curve[Unit:cd]



H=0: —
V=0: —

Lux distance curve

Center beam LUX Beam width V H

Distance (m)	Center beam LUX	Beam width V (m)	H (m)
2m	0.57 LUX	4.2m	1.5m
4m	0.14 LUX	8.3m	3.0m
6m	0.06 LUX	12.5m	4.5m
8m	0.04 LUX	16.6m	5.9m
10m	0.02 LUX	20.8m	7.4m
12m	0.02 LUX	24.9m	8.9m

Vert.Spread:92.2 Horiz.Spread:40.8

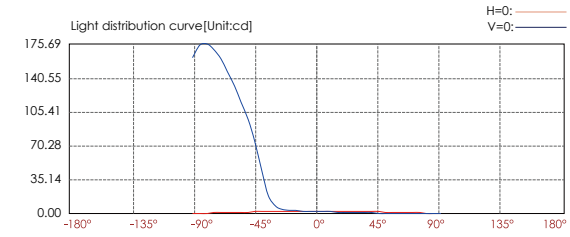

Light distribution curve[Unit:cd]




H=0: —
V=0: —

Lux distance curve

Center beam LUX Beam width V H

Distance (m)	Center beam LUX	Beam width V (m)	H (m)
2m	0.52 LUX	3.5m	0.8m
4m	0.13 LUX	6.9m	1.6m
6m	0.06 LUX	10.4m	2.4m
8m	0.03 LUX	13.8m	3.2m
10m	0.02 LUX	17.3m	4.0m
12m	0.01 LUX	20.8m	4.8m

Vert.Spread:81.7 Horiz.Spread:22.6

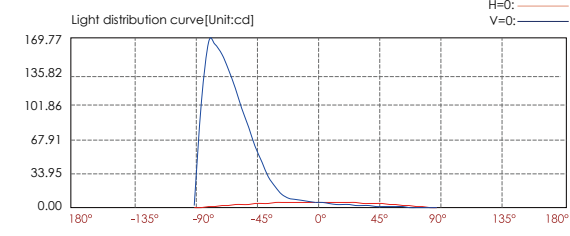

Light distribution curve[Unit:cd]



H=0: —
V=0: —

Lux distance curve

Center beam LUX Beam width V H

Distance (m)	Center beam LUX	Beam width V (m)	H (m)
2m	8.25 LUX	5.1m	4.9m
4m	2.06 LUX	10.1m	9.8m
6m	0.92 LUX	15.2m	14.7m
8m	0.52 LUX	20.3m	19.6m
10m	0.33 LUX	25.3m	24.5m
12m	0.23 LUX	30.4m	29.4m

Vert.Spread:103.5 Horiz.Spread:101.7

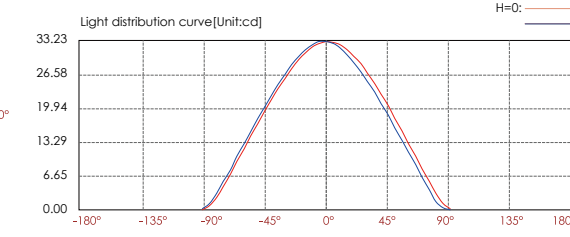

Light distribution curve[Unit:cd]

H=0: —
V=0: —

Lux distance curve

Center beam LUX Beam width V H

Distance (m)	Center beam LUX	Beam width V (m)	H (m)
2m	8.25 LUX	5.1m	4.9m
4m	2.06 LUX	10.1m	9.8m
6m	0.92 LUX	15.2m	14.7m
8m	0.52 LUX	20.3m	19.6m
10m	0.33 LUX	25.3m	24.5m
12m	0.23 LUX	30.4m	29.4m

Vert.Spread:103.5 Horiz.Spread:101.7

INFILUM COLLECTION

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D1CX0934-WL-RAL9023-K40-150#

BO-D1CX0934-WL-
RAL 9023-K40-150#

1. CHOOSE FIXTURE MODEL:

BO-D1CY0934-WL

BO-D1CX0934-WL

BO-D1CZ0934-WL

BO-D1CN1434-WL

BO-D1CW2832-WL

2. BODY FINISH OPTIONS:

-BKAP 7037  Dark Grey

-RAL 9023  Silver Grey

-RAL 9005  Sanded Black

3. CHOOSE CCT

-K30 3000K

-K35 3500K

-K40 4000K

-K50 5000K

-CUS* Custom on request

4. RECESSED SLEEVE (Included)

-150#



CODE: BO-D1CY0934-WL




CODE: BO-D1CX0934-WL




CODE: BO-D1CZ0934-WL



CODE: BO-D1CN1434-WL



CODE: BO-D1CW2832-WL



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA