


CODES: BO-RB2CCR0125-IN / BO-RB2CNS0126-IN

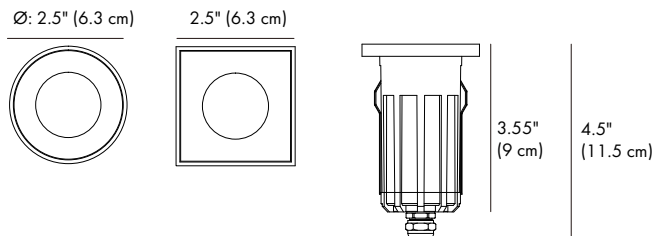

LIGHT SOURCE:

1 × 5W COB NICHIA

REFLECTOR:

R7

SELECTED DEGREE

24°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

29 mA

CONSUMPTION:

5.8W

LUMINANCE:

CW=553 / WW=490

IK:

06

FRONT COVER & HOUSING

Hard chromeplated molding shaped SUS 316L# stainless steel housing

LIGHT WINDOW

Tempered step glass.T=4mm

GLASS PRESSURE CAPACITY

Full area=1,960kgs

REFLECTOR

OPTICS Reflector efficiency≥90%

CRI

90

CCT

3000K / 3500K / 4000K / 5000K / Custom on request

GASKET

Molding shaped silicone seal

RECESSED SLEEVE

PC/ABS ALLOYS

LED DRIVER

Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE

-20°C~40°C

POWER CABLE

Outside of luminaire
110-277V: H05RN-F 3×1.0mm², L=0.5m

DIMMING SUPPORT

Triac PWM Available: 1-10V / Dali / Customized

OPTICS

Referenced Degree(°)



R7

18°

24°

32°

WATER PROOF SOLUTION



A Water-Stopper(Included)

A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector(Optional)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.




sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

SLEEVE (Included)

Option1

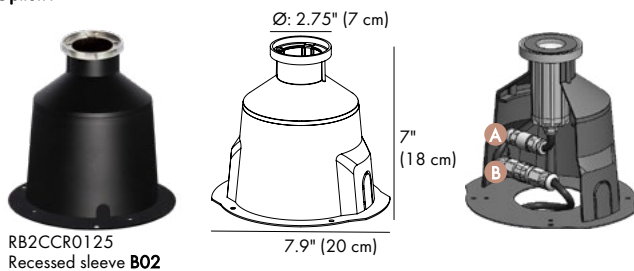

Option2




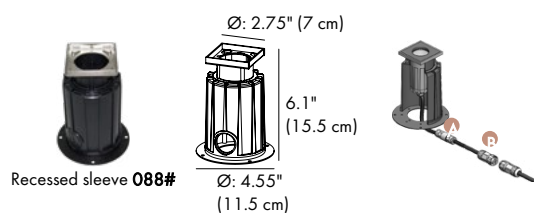




FIGURE A

Ground

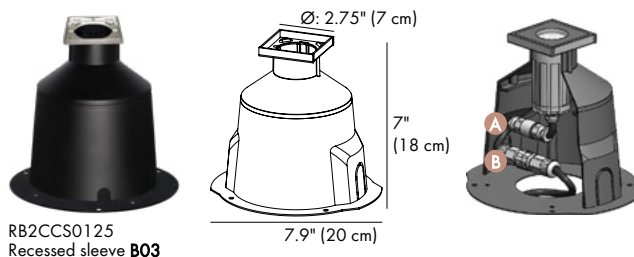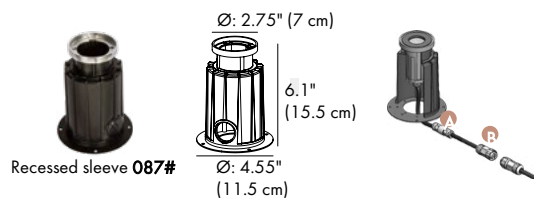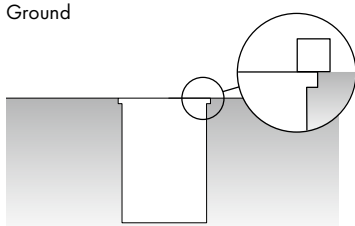

• After installation, the fixture's surface and the floor are on the same level.

PHOTOMETRIC

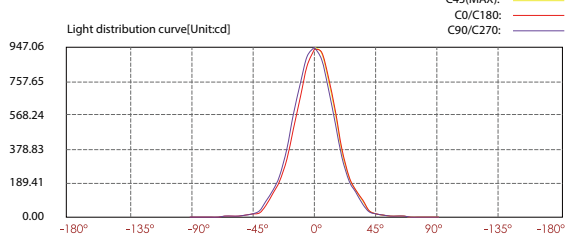

Lux distance curve

Center beam LUX	Beam width V	Beam width H
2m 233.30 LUX	1.2m	1.2m
4m 58.32 LUX	2.4m	2.4m
6m 25.92 LUX	3.6m	3.6m
8m 14.58 LUX	4.9m	4.8m
10m 9.33 LUX	6.1m	6.0m
12m 6.48 LUX	7.3m	7.2m

Ver.Spread:33.8 Horiz.Spread:33.3

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

LITUP

HOW TO ORDER:

CODE:

CODE: BO-RB2CCR0125-IN



ROUND

CODE: BO-RB2CNS0126-IN



SQUARE

EXAMPLE:

BO-RB2CCR0125-IN-K30-DIM

BO-RB2CNR0126-IN

1.CHOOSE FIXTURE MODEL:

BO-RB2CCR0125-IN ROUND

BO-RB2CNS0126-IN SQUARE

2.CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3.DIMMING OPTIONS:

PWM -	Triac PWM
DIM -	1-10V
DALI -	DALI
CUS* -	Custom on request