







CODE: BO-D1CG0734-WL

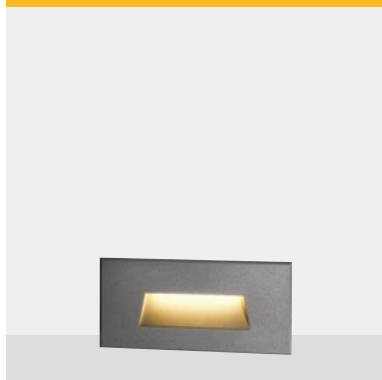

CODE: BO-D1CA0734-WL

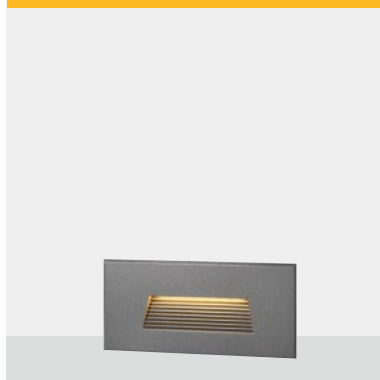

CODE: BO-D1CC1834-WL

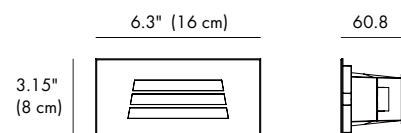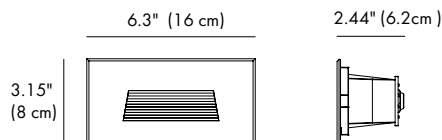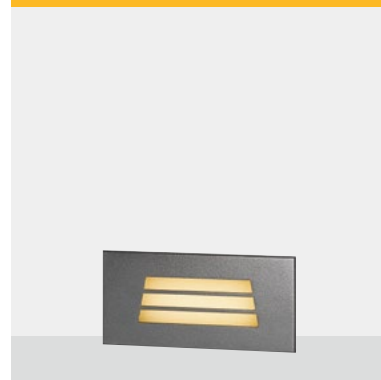

LIGHT SOURCE:

7 × 0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

25 mA

CONSUMPTION:

4.6W

LUMINANCE:

CW=145 | WW=137

IK:

10

LIGHT SOURCE:

7 × 0.5W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

25 mA

CONSUMPTION:

4.6W

LUMINANCE:

CW=140 | WW=131

IK:

10

LIGHT SOURCE:

18 × 0.2W NICHIA

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

22 mA

CONSUMPTION:

4.3W

LUMINANCE:

CW=65 | WW=56

IK:

09

LIGHTING INFORMATION

FRONT COVER	BO-D1CC1834-WL: Made by hard chrome-plated stainless steel 316L# BO-D1FL1234-WL, BO-D1CA0734-WL: 12# Die-casting aluminum
HOUSING	12# Die-casting grey powder coated aluminum T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	UVstop & Fireproof PC
CABLE GLAND	IP68 PG-9 PA66
GASKET	Molding shaped silicone seal
RECESSED SLEEVE	PC/ABS ALLOYS 090#
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire H05RN-F 3×1.0mm², L=0.5m 110-277V
IP	IP65
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized

REGULAR PAINTING COLOR

Basic


Dark Grey
KAP 7037

Secondary

Silver Grey
KAP 9022

Sanded Black
RAL 9005

RECESSED SLEEVE (Included)

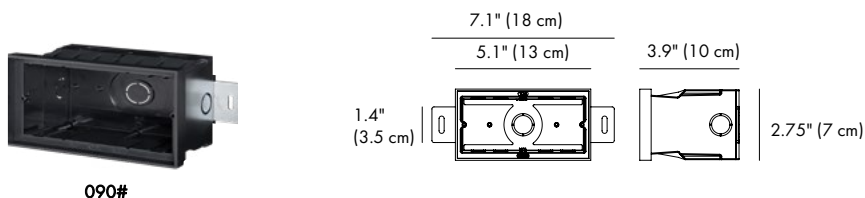

FEATURES



Front cover without screws



Use the high-strength clips for installation and fixation. (please refer remark (1) & (2))




sales@gordonbullarda.com
www.bullardoutdoor.com



991 South Gull Lake Dr
Richland, MI 49083
USA

1-877-964-4646




PHOTOMETRIC

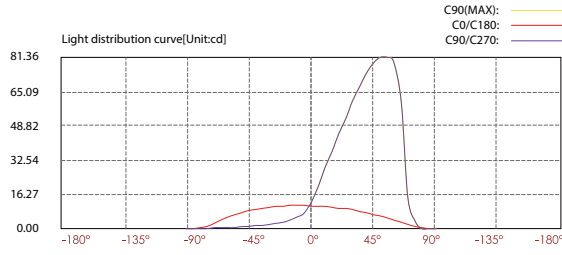

Lux distance cure

Illuminance at a distance		
Center beam LUX	Beam width V	H
2m	2.71 LUX	1.90m 3.90m
4m	0.68 LUX	3.70m 7.80m
6m	0.30 LUX	5.60m 11.6m
8m	0.17 LUX	7.40m 15.5m
10m	0.11 LUX	9.30m 19.4m
12m	0.08 LUX	11.2m 23.3m



Ver.Spread:49.9 Horiz.Spread:88.3

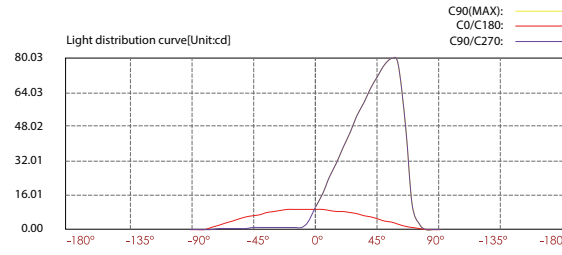

Lux distance cure

Illuminance at a distance		
Center beam LUX	Beam width V	H
2m	2.33 LUX	1.7m 3.70m
4m	0.58 LUX	3.3m 7.40m
6m	0.26 LUX	5.0m 11.1m
8m	0.15 LUX	6.6m 14.8m
10m	0.09 LUX	8.3m 18.5m
12m	0.06 LUX	9.9m 22.2m

Ver.Spread:44.9 Horiz.Spread:85.7

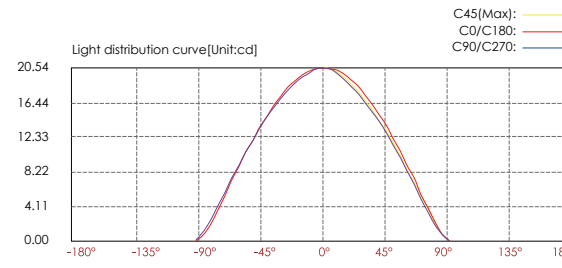

Lux distance cure

Illuminance at a distance		
Center beam LUX	Beam width V	H
2m	5.11 LUX	5.6m 5.9m
4m	1.28 LUX	11.3m 11.8m
6m	0.57 LUX	16.9m 17.6m
8m	0.32 LUX	22.5m 23.5m
10m	0.20 LUX	28.2m 29.4m
12m	0.14 LUX	33.8m 35.3m

Vert.Spread: 109.3 Horiz.Spread: 111.6

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

LITZY COLLECTION

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D1CG0734-WL-BKAP 7037

BO-D1CG0734-
WL-BKAP 7037

1. CHOOSE FIXTURE MODEL:

BO-D1CG0734-WL

BO-D1CA0734-WL

BO-D1CC1834-WL

2. BODY FINISH OPTIONS:



-BKAP 7037

Dark Grey



-RAL 9023


Silver Grey




-RAL 9005

Sanded Black


CODE: BO-D1CG0734-WL

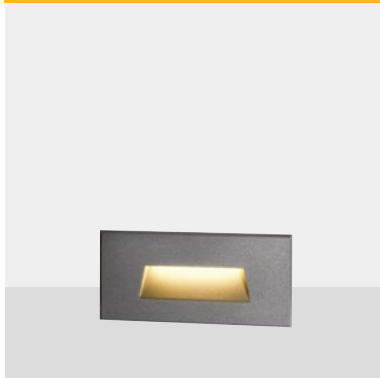

CODE: BO-D1CA0734-WL

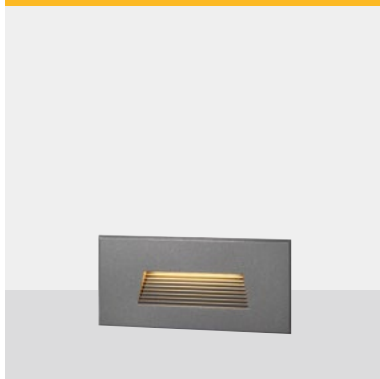

CODE: BO-D1CC1834-WL

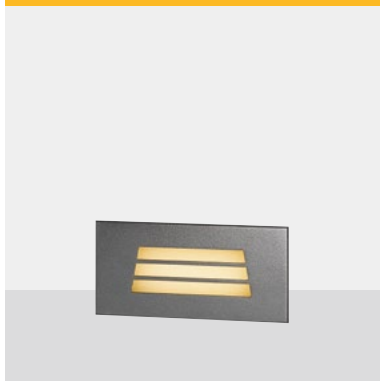

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA