


CODE: BO-B2RKB0657P-IN



SMALL (S)

12.8" (32.5 cm)



LIGHT SOURCE:

6 × 2W

LENS:

B33

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

57 mA

CONSUMPTION:

12.1W


LUMINANCE:

WW=1226 lm

IK:


06

CODE: BO-B2RKB1257P-IN

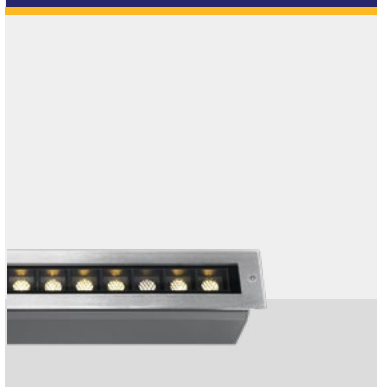

MEDIUM (M)

22.2" (56.5 cm)



LIGHT SOURCE:

12 × 2W

LENS:

B33

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

148 mA

CONSUMPTION:

31.5W


LUMINANCE:

WW=2432 lm

IK:



06

CODE: BO-B2RKB2457P-IN

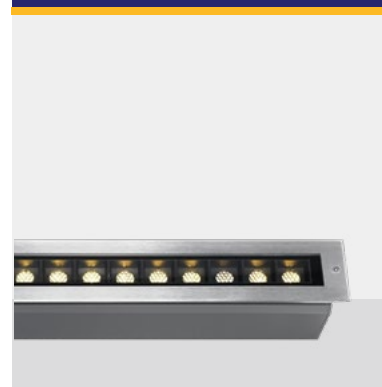

LARGE (L)

41" (104 cm)



LIGHT SOURCE:

12 × 2W

LENS:

B33

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATION CURRENT:

224 mA

CONSUMPTION:

51.1W

LUMINANCE:

WW=4924 lm

IK:

06

SLEEVE (Included)

SLEEVE (Included)

B2RKB0657P-IN
Recessed sleeve **142#**


B2RKB1257P
Recessed sleeve **143#**

B2RKB2457P
Recessed sleeve **144#**




12.36" (31.4 cm)



21.81" (55.4 cm)



1034

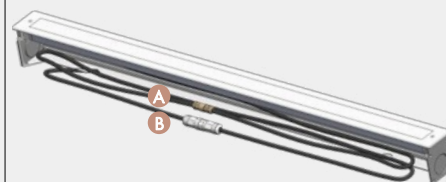

LIGHTING INFORMATION

HOUSING	Extruded aluminum, powder coated
FRONT COVER	Hard chrome-plated stainless steel SUS 316L
LIGHT WINDOW	Tempered step glass. T=6mm
LENS	OPTICS lens. efficiency ≥ 85%
CABLE GLAND	IP68 PG-9 PA66
GASKET	Glass and housing are silicone sealed
LED	Single color OSRAM LED
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
OPERATING TEMPERATURE	-20°C ~ 40°C
POWER CABLE	Outside of luminaire : 110-277V: H05RN-F 3×1.0mm², L=0.5m
MOUNTING SLEEVE	Powder Coated Aluminum
DIMMING SUPPORT	Triac PWM, 1-10V, Dali, Customized

OPTICS

Referenced Degree(°) θ1/2



B33

9°

15°

20°

45°

60°

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646





991 South Gull Lake Dr

Richland, MI 49083



USA

PHOTOMETRIC

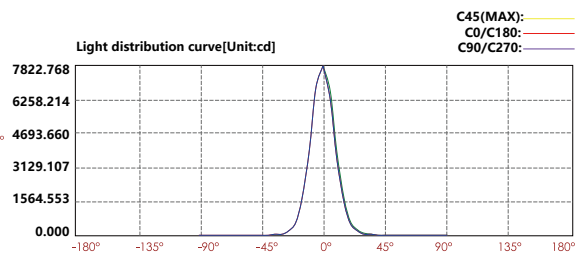




Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m 1950.23 LUX	0.7m	0.7m	
4m 487.56 LUX	1.4m	1.4m	
6m 216.69 LUX	2.1m	2.1m	
8m 121.89 LUX	2.7m	2.7m	
10m 78.01 LUX	3.4m	3.4m	
12m 54.17 LUX	4.1m	4.1m	
Ver.Spread:19.5		Horiz.Spread:19.5	

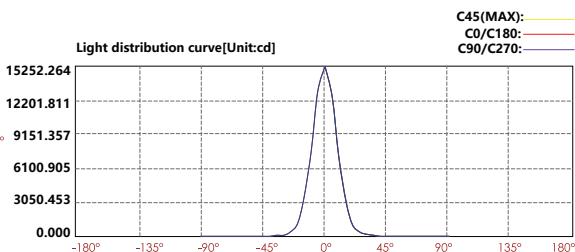

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m 3813.07 LUX	0.7m	0.7m	
4m 953.27 LUX	1.4m	1.4m	
6m 423.67 LUX	2.1m	2.1m	
8m 238.32 LUX	2.8m	2.8m	
10m 152.52 LUX	3.5m	3.5m	
12m 105.92 LUX	4.2m	4.2m	
Ver.Spread:19.7		Horiz.Spread:19.7	

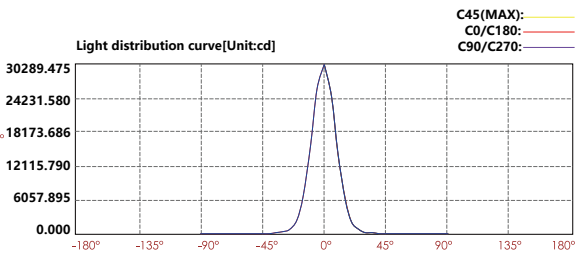

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m 7572.37 LUX	0.7m	0.7m	
4m 1893.09 LUX	1.4m	1.4m	
6m 841.37 LUX	2.1m	2.1m	
8m 473.27 LUX	2.8m	2.8m	
10m 302.89 LUX	3.5m	3.5m	
12m 210.34 LUX	4.2m	4.2m	
Ver.Spread:20.1		Horiz.Spread:20.0	

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

HOW TO ORDER:

CODE:

CODE: BO-B2RKB0657P-IN

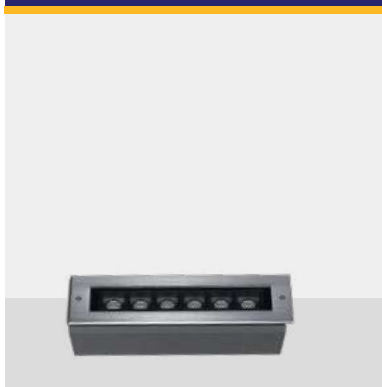

SMALL (S)

CODE: BO-B2RKB1257P-IN



MEDIUM (M)

CODE: BO-B2RKB2457P-IN



LARGE (L)

EXAMPLE:

BO-B2RKB0657P-IN-K30-DIM-B

BO-B2RKB0657P-
IN-K30-DIM-B

1. CHOOSE FIXTURE SIZE:

BO-B2RKB0657P-IN	SMALL
BO-B2RKB1257P-IN	MEDIUM
BO-B2RKB2457P-IN	LARGE

2. CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. DIMMING OPTIONS:

PWM -	Triac PWM
DIM -	1-10V
DALI -	DALI
CUS* -	Custom on request

4. WATER PROOF SOLUTION (included):

- B **IP67 Jiffy quick plug/socket connector (Option)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

