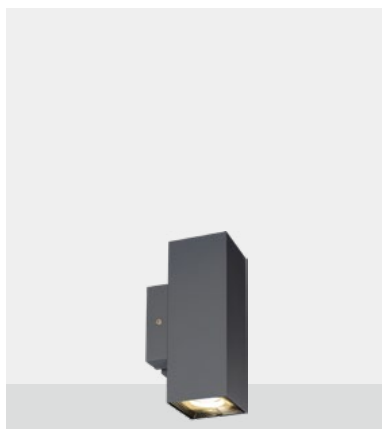


CODE:

BO-R7VF0225-WL

LIGHT SOURCE:

2 × 5W

REFLECTOR:

R7

SELECTED DEGREE:

24°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

68 mA

CONSUMPTION:


15W

LUMINANCE:

2 × 480 lm

IK:

05

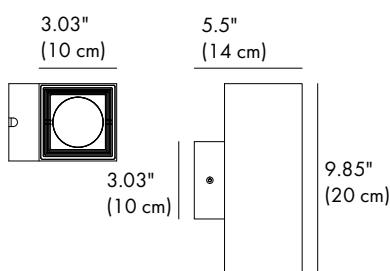

CODE:

BO-R7WF0229-WL

LIGHT SOURCE:

2 × 12W

REFLECTOR:

R17

SELECTED DEGREE:

18°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

116 mA

CONSUMPTION:

26W

LUMINANCE:

2 × 1204 lm

IK:

05



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING	12# Die-casting aluminum finishing or powder painting
LIGHT WINDOW	T=60-80μm. Adhesion of ISO class 1 /ASTM class 4B
GASKET	Tempered Glass 3mm
LED DRIVER	Tooling shaped seal
LED	Constant voltage input, constant current output NICHIA
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.3m

REGULAR PAINTING COLOR


Basic	Secondary	
 Dark Grey KAP 7037	 Silver Grey KAP 9022	 Sanded Black RAL 9005

OPTICS


Referenced Degree(°)θ1/2

		18°	24°	32°
	R7			
	R17	12°	18°	32°

DIAGRAM OF INSTRUCTION

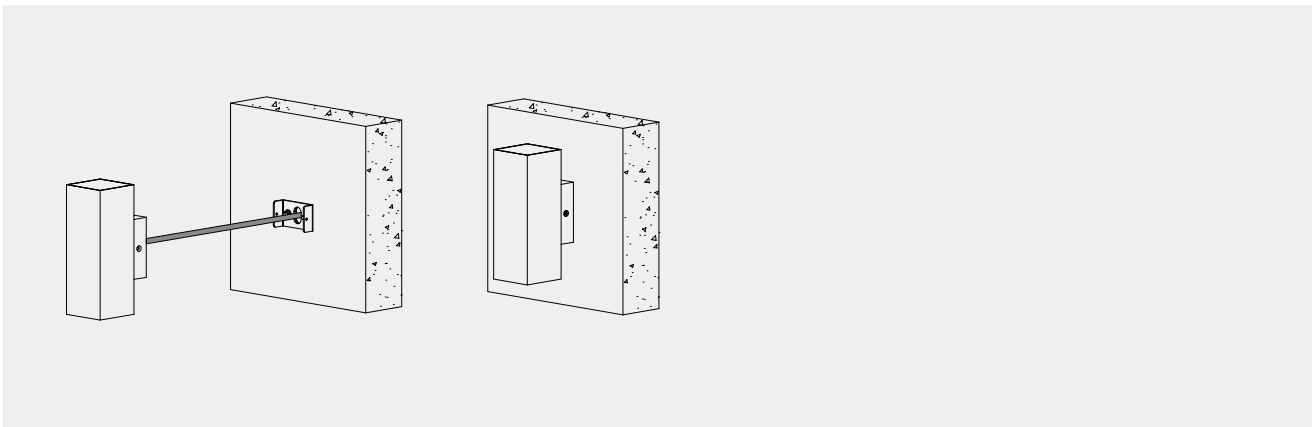

BEAM DEMO

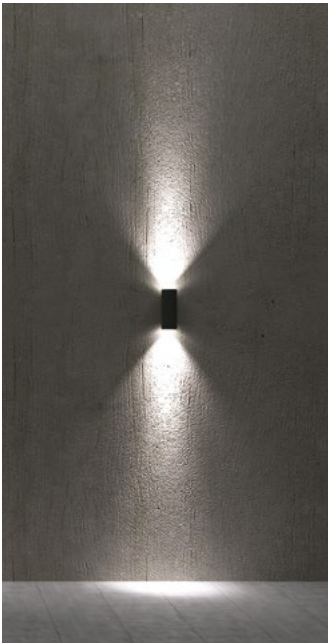

IP66
OUTDOOR
RATED



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr




Richland, MI 49083

USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.





PHOTOMETRIC

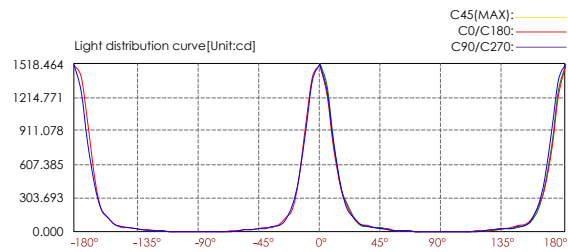

Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	375.64 LUX	0.8m	0.8m
4m	93.91 LUX	1.6m	1.6m
6m	41.74 LUX	2.4m	2.4m
8m	23.48 LUX	3.2m	3.2m
10m	15.03 LUX	4.0m	4.0m
12m	10.43 LUX	4.8m	4.8m
Ver.Spread:22.5		Horiz.Spread:22.7	

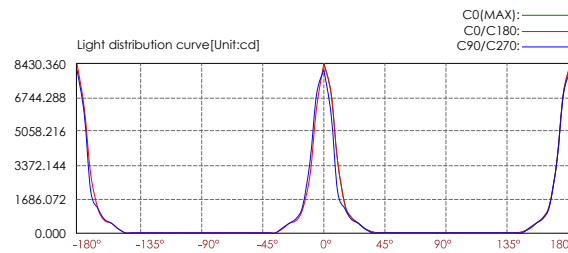

Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX		V	H
2m	2107.59 LUX	0.6m	0.6m
4m	526.90 LUX	1.2m	1.2m
6m	234.18 LUX	1.9m	1.8m
8m	131.72 LUX	2.5m	2.3m
10m	84.30 LUX	3.1m	2.9m
12m	58.54 LUX	3.7m	3.5m
Ver.Spread:16.7		Horiz.Spread:17.6	



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA