



CODE: BO-D2FU0110-IN



Ø: 4.56" (11.6 cm)



4.4"
(11.2 cm)

LIGHT SOURCE:

GU-10

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

N/A

CONSUMPTION:

N/A

LUMINANCE:

N/A

IK:

10

FRONT COVER

Hard chromeplated Stainless steel SUS 316L#

HOUSING

12# Die-casting grey powder coated aluminum T=60-80µm

LIGHT WINDOW

Adhesion of ISO class 1/ASTM class 4B

GASKET

Tempered step glass.T=6mm

POWER CABLE

Molding shaped silicone seal

CRI

Outside of luminaire : H05RN-F 3×1.0mm², L=0.5m(110-277V)

CABLE GLAND

90

LED TYPE

IP68 PG-9 PA66

LED DRIVER

N/A

LENS

Constant Voltage Input, Constant Current Output

RECESSED SLEEVE MATERIAL

OPTICS lens.efficiency≥85%

GLASS PRESSURE CAPACITY

PC/ABS ALLOYS

IP


Full area=1,226kgs

OPERATING TEMPERATURE

IP67

-20°C~40°C

WATER PROOF SOLUTION

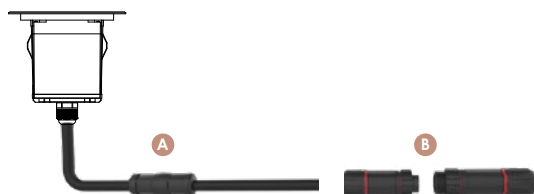

A Water-Stopper(Included)

A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector(Optional)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

SLEEVE (Included)




Option 1

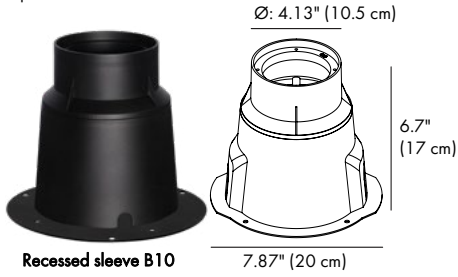

Option 2



PHOTOMETRIC

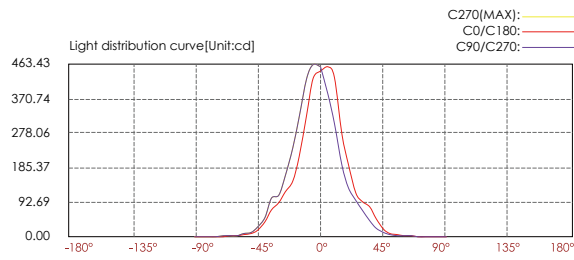

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m 111.41 LUX	1.2m	1.2m	
4m 27.85 LUX	2.4m	2.3m	
6m 12.38 LUX	3.7m	3.5m	
8m 6.96 LUX	4.9m	4.6m	
10m 4.46 LUX	6.1m	5.8m	
12m 3.09 LUX	7.3m	7.0m	

Ver.Spread:33.9 Horiz.Spread:32.4

LITUP

HOW TO ORDER:

CODE:

CODE: BO-RB2CCR0125-IN



EXAMPLE:

BO-RB2CCR0125-IN-K30-DIM

BO-RB2CNR0126-IN

1. CHOOSE FIXTURE MODEL:

BO-RB2CCR0125-IN ROUND

BO-RB2CNS0126-IN SQUARE

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all sheet sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.