



CODE: BO-B2BPR0157-IN ○
BO-B2BPS0157-IN □

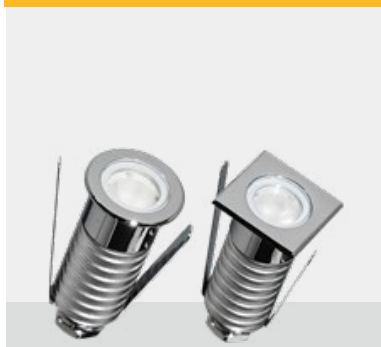

LIGHT SOURCE:

1 × 1.5W

LENS:

B15

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

83 mA



CONSUMPTION:

2 W

LUMINANCE:

136 lm

CODE: BO-B2BPR0157-IN ○
BO-B2BPS0157-IN □

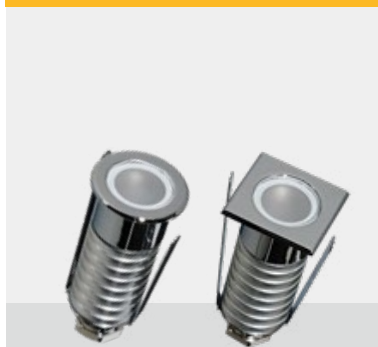

LIGHT SOURCE:

1 × 0.5W

LENS:

-

SELECTED DEGREE:

70°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA

CONSUMPTION:

0.62 W

LUMINANCE:

23 lm


WATER PROOF SOLUTION




- A Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

SLEEVE (Included)

Option1

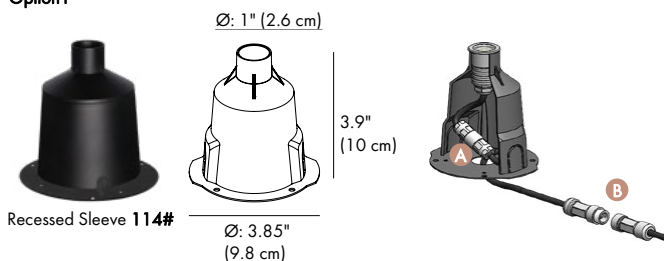

Option2

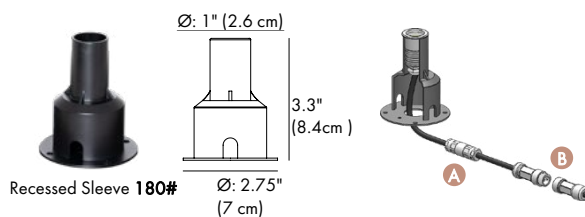

LIGHTING INFORMATION

FRONT COVER	Hard chromeplated stainless steel SUS 316#
HOUSING	Aluminum anodized finshing or powder painting
LIGHT WINDOW	Tempered glass.T=2mm
GASKET	Silicon rubber molding shaped seal
POWER CABLE	Outside of luminaire : 110-277V: H05RN-F 2×1.0mm², L=0.3m IP67
CABLE GLAND	Nickel coated copper
LED TYPE	BO-B2BPR0157-IN, BO-B2BPS0157-IN: OSRAM BO-D2BPR0134-IN, BO- D2BPS0134-IN: SEOUL
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
LED DRIVER	Constant Current Input
LENS	OPTICS lens.efficiency≥85%
RECESSED SLEEVE	PC/ABS ALLOYS
DIMMING SUPPORT	Triac PWM, 1-10V,Dali , Customized
IP	IP67
IK	02
OPERATING TEMPERATURE	-20 °C~40 °C

OPTICS

Referenced Degree(°)θ1/2



B15




10°

15°

20°

30°

PHOTOMETRIC

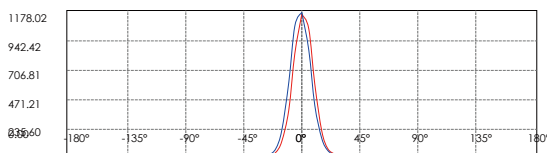

Lux distance Curve

Illuminance at a Distance			
Center Beam LUX	Beam Width	V	H
2m	286.90 LUX	0.6m	0.7m
4m	71.72 LUX	1.3m	1.3m
6m	31.88 LUX	1.9m	2.0m
8m	17.93 LUX	2.5m	2.6m
10m	11.48 LUX	3.2m	3.3m
12m	7.97 LUX	3.8m	3.9m

Vert.Spread:18.0 Horiz.Spread:18.6

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

HOW TO ORDER:

CODE:

CODE: BO-B2BPR0157-IN ○
BO-B2BPS0157-IN □

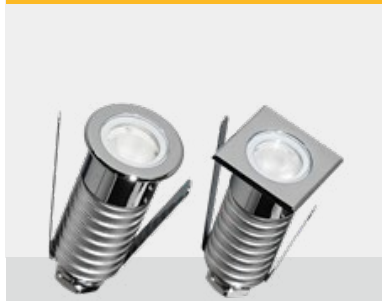

CODE: BO-B2BPR0157-IN ○
BO-B2BPS0157-IN □



EXAMPLE:

BO-B2BPR0157-IN-K30-DIM-A-B

BO-B2BPR0157-IN-
K30-DIM-A-B

1. CHOOSE FIXTURE MODEL:

BO-B2BPR0157-IN (round)

BO-B2BPS0157-IN (square)

BO-B2BPR0157-IN (round)

BO-B2BPS0157-IN (square)

2. CHOOSE CCT:


-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. DIMMING OPTIONS:

-PWM	Triac PWM
-DIM	1-10V
-DALI	DALI
-CUS*	Custom on request

4. WATER PROOF SOLUTION (included):

- A Water-Stopper(Included)**
IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HOW TO ORDER:

CODE:

CODE: BO-B2BPR0157-IN ○
BO-B2BPS0157-IN □

EXAMPLE:

BO-B2BPR0157-IN-K30-DIM-A-B

BO-B2BPR0157-IN-
K30-DIM-A-B

6. WATER PROOF SOLUTION (optional):

- B IP67 Jiffy quick plug/socket connector (Option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



CODE: BO-B2BPR0157-IN ○
BO-B2BPS0157-IN □

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA