







CODE: BO-B3TMS0158-SP

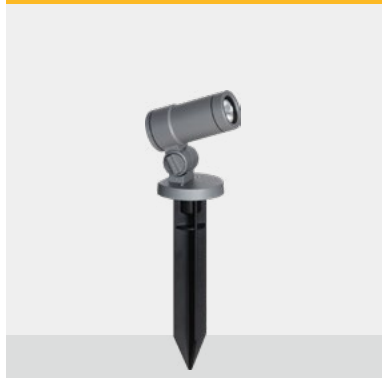

CODE: BO-B3TNS0126-SP

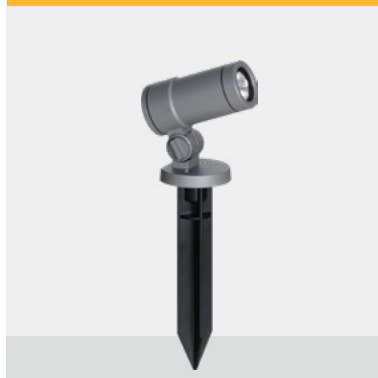

CODE: BO-B3TOS0128-SP

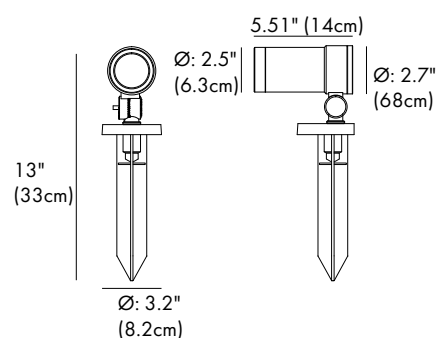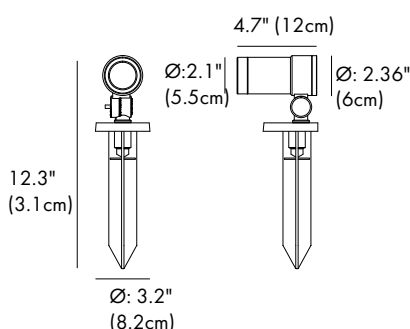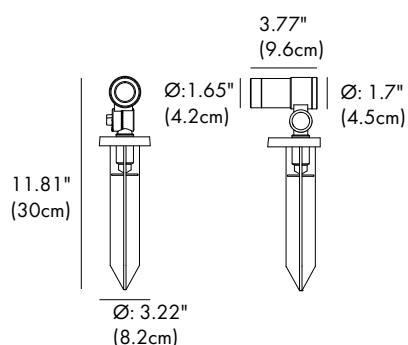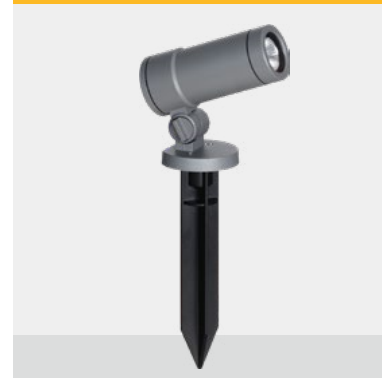

LIGHT SOURCE:

1×3W NICHIA

LENS:

B33

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

26 mA

CONSUMPTION:

5.4 W

LUMINANCE:

CW = 305 lm
WW = 274 lm

LIGHT SOURCE:

1×6W NICHIA

LENS:

B51

SELECTED DEGREE:

28°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

385 mA

CONSUMPTION:

6.8 W

LUMINANCE:

CW = 740 lm
WW = 667 lm

LIGHT SOURCE:

1×10W NICHIA

LENS:

B52

SELECTED DEGREE:

24°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

570 mA

CONSUMPTION:

12.3 W

LUMINANCE:

CW = 1200 lm
WW = 1315 lm





sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

CODE: BO-B3TPS0171-SP

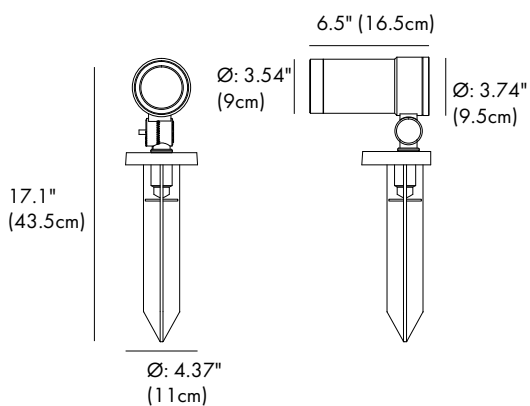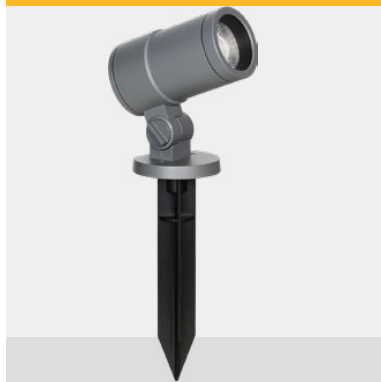

LIGHT SOURCE:

1×20 W NICHIA

LENS:

B66

SELECTED DEGREE:

25°

INPUT VOLTAGE:

110-277 V

OPERATING CURRENT:

93 mA

CONSUMPTION:

25.8 W

LUMINANCE:

CW=2200

WW=2071



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

ACCESSORIES (Optional)


SPIKE STAINLESS STEEL

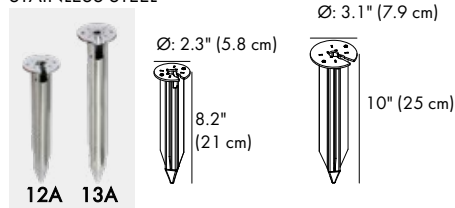

I'D	Fitted Item
12A	BO-B3TMS0158-SP BO-B3TNS0126-SP BO-B3TOS0128-SP
13	BO-B3TPS017-SP




PC/ABS alloys

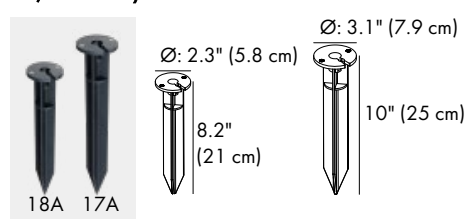

I'D	Fitted Item
18A	BO-B3TMS0158-SP BO-B3TNS0126-SP BO-B3TOS0128-SP
17A	BO-B3TPS017-SP




TREE POLE STRAP

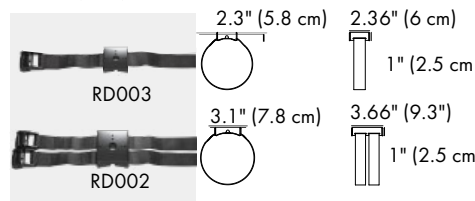

I'D	Fitted Item
RD003	BO-B3TMS0158-SP BO-B3TNS0126-SP BO-B3TOS0128-SP
RD002	BO-B3TPS017-SP




BEVEL CUT HOOD

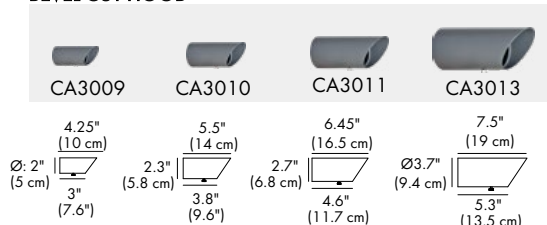

I'D	Fitted Item
CA3009	BO-B3TMS0158-SP
CA3010	BO-B3TNS0126-SP
CA3011	BO-B3TOS0128-SP
CA3013	BO-B3TPS017-SP




HONEYCOMB LOUVER

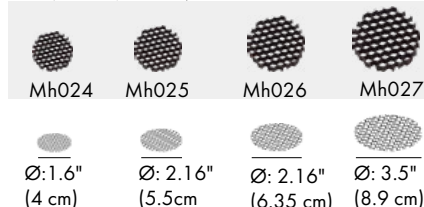

I'D	Fitted Item
Mh024	BO-B3TMS0158-SP
Mh025	BO-B3TNS0126-SP
Mh026	BO-B3TOS0128-SP
Mh027	BO-B3TPS017-SP



WATER PROOF SOLUTION

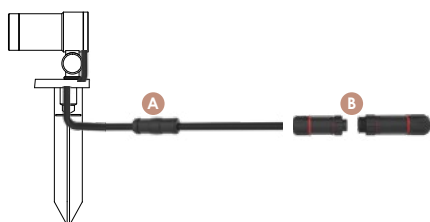

A Water-Stopper(Included)
A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

B IP67 Jiffy quick plug/socket connector(Option)
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80μm.Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	Tempered glass.T=4mm
GASKET	Tooling shaped seal
LED	Nichia
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
LED DRIVER	Constant Voltage Input, Constant Current Output
LENS/REFLECTOR	OPTICS lens,efficiency≥85%
OPERATING TEMPERATURE	-20℃ ~40℃
POWER	Outside of luminaire 110-277V: H05RN-F 3×1.0mm ² , L=2.0m
DIMMING SUPPORT	Triac PWM, 1-10V, Dali ,Customized

FINISH OPTIONS




Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

OPTICS

Referenced Degree(°)Ø1/2

		9°	15°	20°	45°	60°
	B33					
	B52	20°	36°			
	B66	15°	25°	38°		
	B51	20°	28°	36°	60°	



PHOTOMETRIC (Non Antiglare louver)

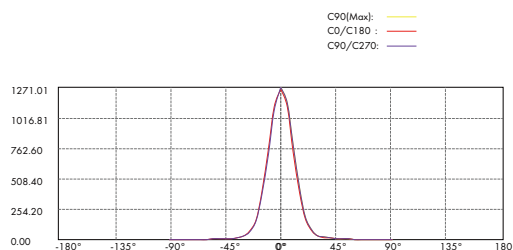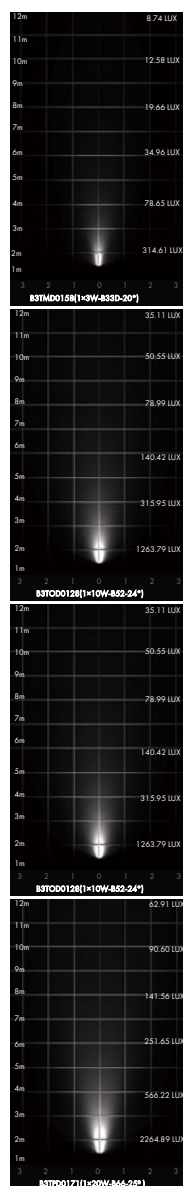

Lux distance Curve

Illuminance at a Distance		
Center Beam LUX	Beam Width V	Beam Width H
2m	314.61 LUX	0.8m 0.8m
4m	78.65 LUX	1.6m 1.6m
6m	34.96 LUX	2.5m 2.5m
8m	19.66 LUX	3.3m 3.3m
10m	12.58 LUX	4.1m 4.1m
12m	8.74 LUX	4.9m 4.9m



Vert.Spread:23.3 Horiz.Spread:23.2

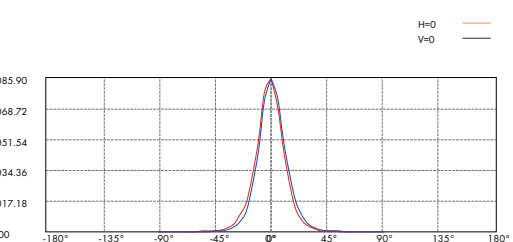

Lux distance Curve

Illuminance at a Distance		
Center Beam LUX	Beam Width V	Beam Width H
2m	1263.79 LUX	0.8m 0.8m
4m	315.95 LUX	1.6m 1.6m
6m	140.42 LUX	2.4m 2.4m
8m	78.99 LUX	3.2m 3.2m
10m	50.55 LUX	4.0m 4.0m
12m	35.11 LUX	4.8m 4.8m



Vert.Spread:22.8 Horiz.Spread:22.6

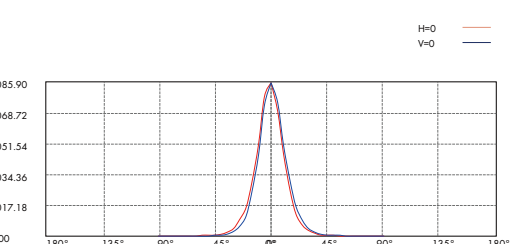

Lux distance Curve

Illuminance at a Distance		
Center Beam LUX	Beam Width V	Beam Width H
2m	1263.79 LUX	0.8m 0.8m
4m	315.95 LUX	1.6m 1.6m
6m	140.42 LUX	2.4m 2.4m
8m	78.99 LUX	3.2m 3.2m
10m	50.55 LUX	4.0m 4.0m
12m	35.11 LUX	4.8m 4.8m

Vert.Spread:22.8 Horiz.Spread:22.6

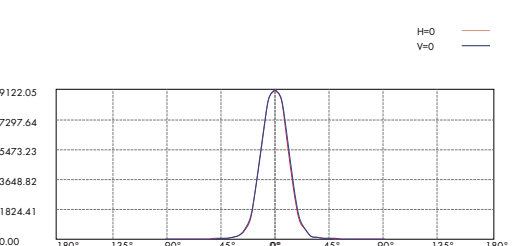

Lux distance Curve

Illuminance at a Distance		
Center Beam LUX	Beam Width V	Beam Width H
2m	2264.89 LUX	0.9m 0.9m
4m	566.22 LUX	1.8m 1.8m
6m	251.65 LUX	2.7m 2.8m
8m	141.56 LUX	3.6m 3.7m
10m	90.60 LUX	4.5m 4.6m
12m	62.91 LUX	5.4m 5.5m

Vert.Spread:25.5 Horiz.Spread:25.8

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

SARIN COLLECTION

CODE: BO-R3EJU0126-SP



(SMALL)

CODE: BO-B3TNS0126-SP



(MEDIUM)

CODE: BO-B3TOS0128-SP



(LARGE)

CODE: BO-B3TPS0171-SP



(EXTRA LARGE)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-R3EJU0126-SP-K30-PWM-KAP 7037-CA3023-A-B-CA3009-Mh024

BO-R3EJU0126-SP

1. CHOOSE FIXTURE SIZE:

BO-R3EJU0126-SP	SMALL
BO-B3TNS0126-SP	MEDIUM
BO-B3TOS0128-SP	LARGE
BO-B3TPS0171-SP	EXTRA LARGE

2. CHOOSE CCT

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. DIMMING OPTIONS:

-PWM	Triac PWM
-DIM	1-10V
-DALI	DALI
-CUS*	Custom on request

4. FINISH OPTIONS:

	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

SARIN COLLECTION

HOW TO ORDER:

CODE:


EXAMPLE:

BO-R3EJU0126-SP-K30-PWM-KAP 7037-CA3023-A-B-CA3009-Mh024

BO-R3EJU0126-SP

5.WATER PROOF SOLUTIONS: (included)

-A




A

Water-Stopper

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

6.WATER PROOF SOLUTIONS: (optional)

-B

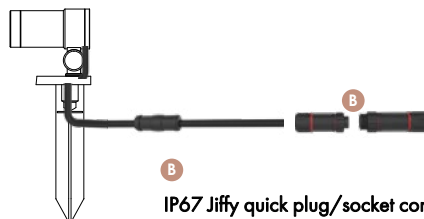

B

IP67 Jiffy quick plug/socket connector A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

7.SPIKE (stainless steel)

-12A BO-B3TMS0158-SP
BO-B3TNS0126-SP
BO-B3TOS0128-SP



-13A BO-B3TPS017-SP



8.SPIKE (PC/ABS alloys)

-18A BO-B3TMS0158-SP
BO-B3TNS0126-SP
BO-B3TOS0128-SP



-17A BO-B3TPS017-SP



CODE: BO-R3EJU0126-SP



(SMALL)

CODE: BO-B3TNS0126-SP



(MEDIUM)

CODE: BO-B3TOS0128-SP



(LARGE)

CODE: BO-B3TPS0171-SP



(EXTRA LARGE)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

SARIN COLLECTION

HOW TO ORDER:

CODE:

EXAMPLE:

BO-R3EJU0126-SP-K30-PWM-KAP 7037-CA3023-A-B-CA3009-Mh024

BO-R3EJU0126-SP

9.TREE POLE STRAP (optional)

-RD003 BO-B3TMS0158-SP
BO-B3TNS0126-SP
BO-B3TOS0128-SP



-RD002 BO-B3TPS0171-SP



10.BEVEL CUT HOOD (optional)

-CA3009 BO-B3TMS0158-SP



-CA3010 BO-B3TNS0126-SP



-CA3011 BO-B3TOS0128-SP



-CA3013 BO-B3TPS017-SP



11. HONEYCOMB LOUVER (optional)

-Mh024 BO-B3TMS0158-SP



-Mh025 BO-B3TNS0126-SP



-Mh026 BO-B3TOS0128-SP



-Mh027 BO-B3TPS017-SP



CODE: BO-R3EJU0126-SP



(SMALL)

CODE: BO-B3TNS0126-SP



(MEDIUM)

CODE: BO-B3TOS0128-SP



(LARGE)

CODE: BO-B3TPS0171-SP



(EXTRA LARGE)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA