



CODE: BO-A6LE0658-WL

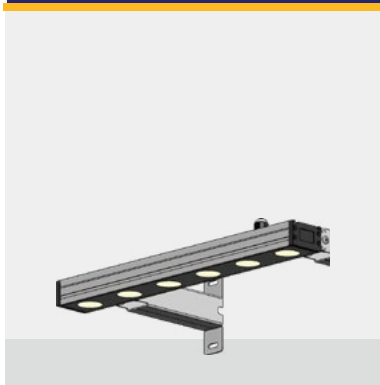

SMALL (S)



LIGHT SOURCE:

6 × 4W

LENS:

A24

SELECTED DEGREE:

15°(A24/15°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

114 mA

CONSUMPTION:

26.1W


LUMINANCE:

CW=2236 | WW=1834


IK:

05

CODE: BO-A6LE1258-WL

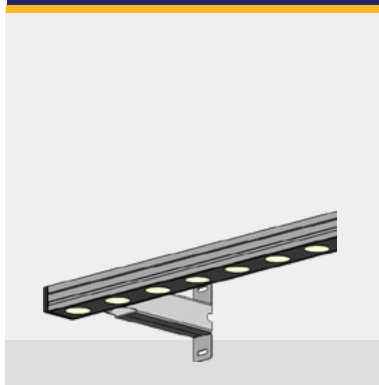

MEDIUM (M)

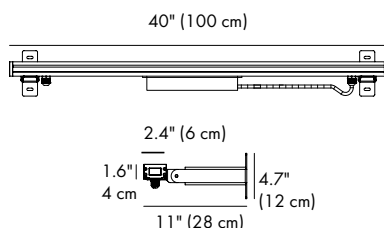

LIGHT SOURCE:

12 × 4W

LENS:

A24

SELECTED DEGREE:

15°(A24/15°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

214 mA

CONSUMPTION:

51W


LUMINANCE:

CW=4417 | WW=3622

IK:

05

WATER PROOF SOLUTION

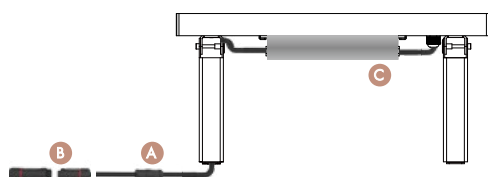

- A Water-Stopper(Included)**
A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.
- C High voltage driver IP65**



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

LIGHTING INFORMATION

HOUSING	Extruded aluminum anodized finishing
BRACKET	Aluminum anodized finishing
LIGHT WINDOW	Tempered glass, T=2mm
CABLE GLAND	IP-68 PG-13.5 PA66
GASKET	Glass and housing are silicone sealed
LENS	OPTICS lens efficiency ≥ 85%
LED	NICHIA SMD 3535
OPERATING TEMPERATURE	-20°C ~ 40°C
POWER CABLE	Outside of luminaire HO5RN-F 3×1.0mm², L=0.5m 110-277V
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized


OPTICS:




A24

15° 30° 15°×30° 15°×45°


ANTI GLARE LOUVER(Optional)

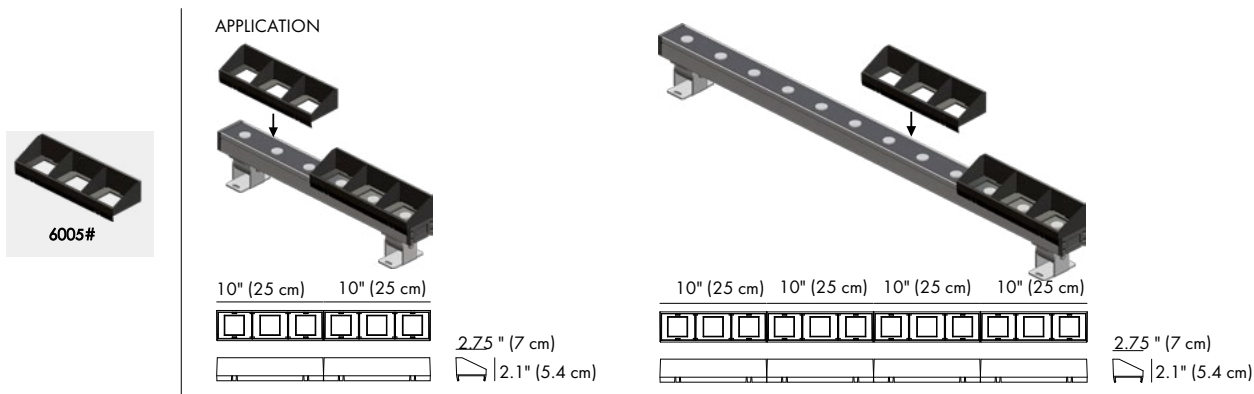

EXTERNAL BRACKET (Optional)

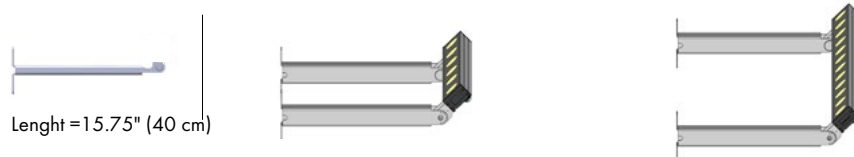

HIGH VOLTAGE INPUT (110V-277V) POWER CABLE WIRING TYPE

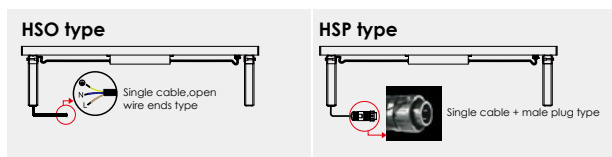

- High voltage input default: Single HSO type power cable, waterproof plugs are not included.
- (Other power cable type and plugs are optional)




sales@gordonbullarda.com
www.bullardoutdoor.com



991 South Gull Lake Dr
Richland, MI 49083
USA



1-877-964-4646

PHOTOMETRIC (Non anti glare louver)

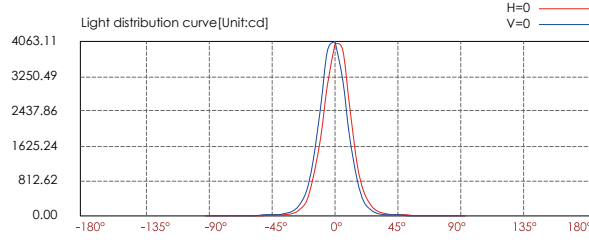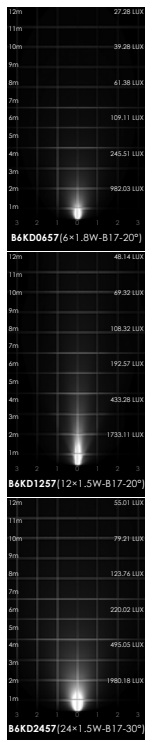



Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	982.03 LUX	0.7m	0.8m
4m	245.51 LUX	1.5m	1.5m
6m	109.11 LUX	2.2m	2.3m
8m	61.38 LUX	3.0m	3.0m
10m	39.28 LUX	3.7m	3.8m
12m	27.28 LUX	4.5m	4.5m
Ver.Spread: 21.2		Horiz.Spread: 21.4	

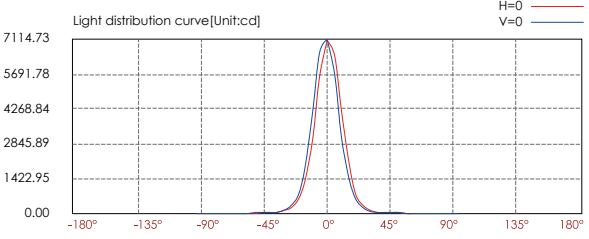

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	1733.11 LUX	0.7m	0.7m
4m	433.28 LUX	1.4m	1.4m
6m	192.57 LUX	2.2m	2.2m
8m	108.32 LUX	2.9m	2.9m
10m	69.32 LUX	3.6m	3.6m
12m	48.14 LUX	4.3m	4.3m
Ver.Spread: 20.5		Horiz.Spread: 20.6	

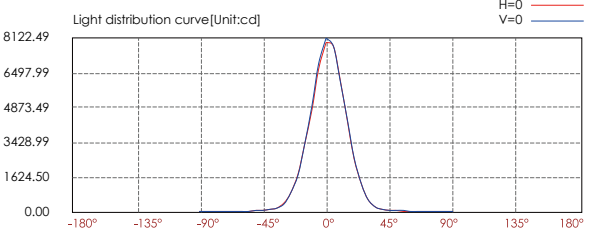

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	1980.18 LUX	1.0m	1.0m
4m	495.05 LUX	2.0m	2.0m
6m	220.02 LUX	2.9m	3.0m
8m	123.76 LUX	3.9m	4.0m
10m	79.21 LUX	4.9m	5.0m
12m	55.01 LUX	5.9m	6.0m
Ver.Spread: 27.6		Horiz.Spread: 27.9	

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083


USA

SENTO MAX COLLECTION

CODE: BO-A6LE0658-WL

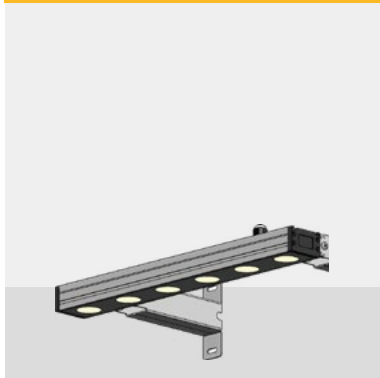

CODE: BO-A6LE1258-WL

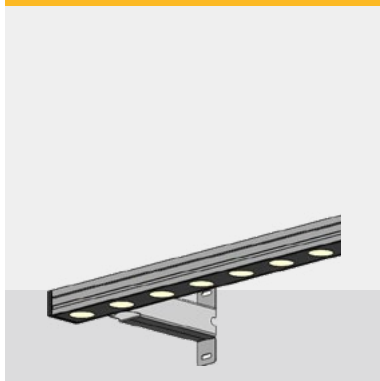

HOW TO ORDER:

CODE:

EXAMPLE:

BO-A6LE0658-WL-6005#-L40

BO-A6LE0658-
WL-6005#-L40

1.CHOOSE FIXTURE SIZE:

BO-A6LE0658-WL

BO-A6LE1258-WL

2.ANTI GLARE LOUVER (Optional)

6005#



2.ANTI GLARE LOUVER (Optional)

L40



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA