



CODE: BO-A6LE0658-WL

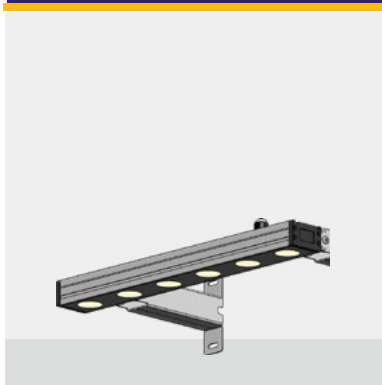

SMALL (S)



LIGHT SOURCE:

6 × 4W

LENS:

A24

SELECTED DEGREE:

15°(A24/15°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

114 mA

CONSUMPTION:

26.1W


LUMINANCE:

CW=2236 | WW=1834


IK:

05

CODE: BO-A6LE1258-WL

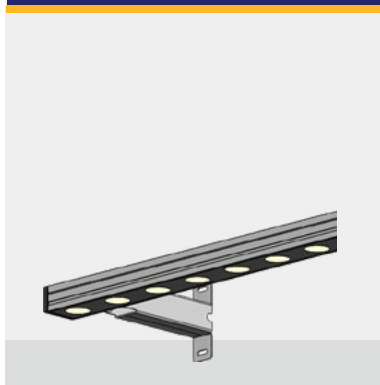

MEDIUM (M)

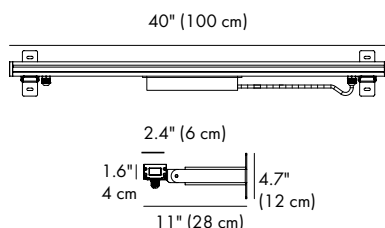

LIGHT SOURCE:

12 × 4W

LENS:

A24

SELECTED DEGREE:

15°(A24/15°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

214 mA

CONSUMPTION:

51W


LUMINANCE:

CW=4417 | WW=3622

IK:

05

WATER PROOF SOLUTION

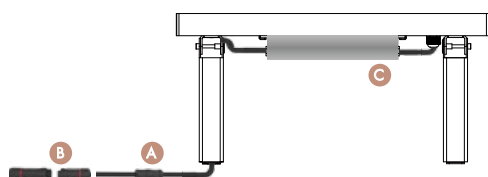

- A Water-Stopper(Included)**
A IP-65 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP67 Jiffy quick plug/socket connector(Optional)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.
- C High voltage driver IP65**



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

LIGHTING INFORMATION

HOUSING	Extruded aluminum anodized finishing
BRACKET	Aluminum anodized finishing
LIGHT WINDOW	Tempered glass, T=2mm
CABLE GLAND	IP-68 PG-13.5 PA66
GASKET	Glass and housing are silicone sealed
LENS	OPTICS lens efficiency ≥ 85%
LED	NICHIA SMD 3535
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
OPERATING TEMPERATURE	-20°C ~ 40°C
POWER CABLE	Outside of luminaire H05RN-F 3×1.0mm², L=0.5m 110-277V
DIMMING SUPPORT	Triac PWM Available, 1-10V, Dali, Customized


OPTICS:




A24

15° 30° 15°×30° 15°×45°


ANTI GLARE LOUVER(Optional)

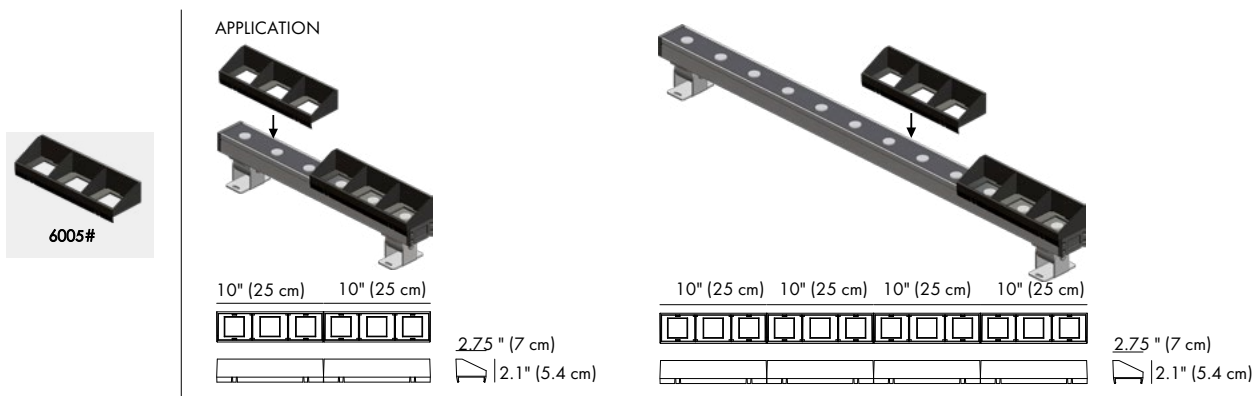

EXTERNAL BRACKET (Optional)

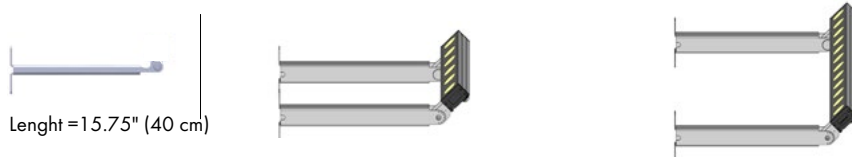

HIGH VOLTAGE INPUT (110V-277V) POWER CABLE WIRING TYPE

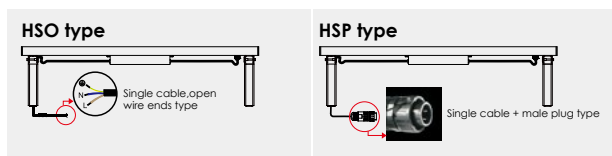

- High voltage input default: Single HSO type power cable, waterproof plugs are not included.
- (Other power cable type and plugs are optional)




sales@gordonbullard.com
www.bullardoutdoor.com



991 South Gull Lake Dr
Richland, MI 49083
USA

1-877-964-4646

PHOTOMETRIC (Non anti glare louver)

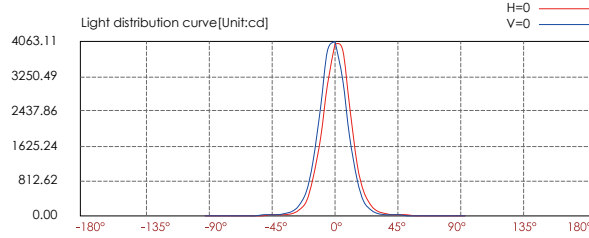
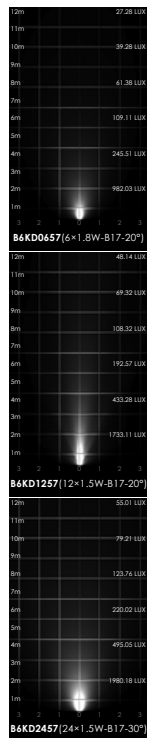


Lux distance cure

Beam width
V H

Center beam LUX	Beam width V	H
2m 982.03 LUX	0.7m	0.8m
4m 245.51 LUX	1.5m	1.5m
6m 109.11 LUX	2.2m	2.3m
8m 61.38 LUX	3.0m	3.0m
10m 39.28 LUX	3.7m	3.8m
12m 27.28 LUX	4.5m	4.5m

Ver.Spread: 21.2 Horiz.Spread: 21.4

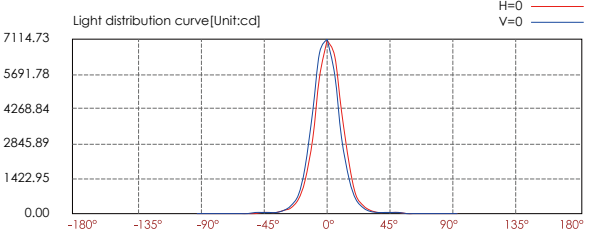



Lux distance cure

Beam width
V H

Center beam LUX	Beam width V	H
2m 1733.11 LUX	0.7m	0.7m
4m 433.28 LUX	1.4m	1.4m
6m 192.57 LUX	2.2m	2.2m
8m 108.32 LUX	2.9m	2.9m
10m 69.32 LUX	3.6m	3.6m
12m 48.14 LUX	4.3m	4.3m

Ver.Spread: 20.5 Horiz.Spread: 20.6

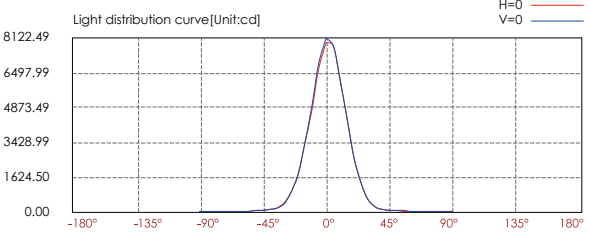

Lux distance cure


Beam width
V H

Center beam LUX	Beam width V	H
2m 1980.18 LUX	1.0m	1.0m
4m 495.05 LUX	2.0m	2.0m
6m 220.02 LUX	2.9m	3.0m
8m 123.76 LUX	3.9m	4.0m
10m 79.21 LUX	4.9m	5.0m
12m 55.01 LUX	5.9m	6.0m

Ver.Spread: 27.6 Horiz.Spread: 27.9


SENTO MAX COLLECTION

CODE: BO-A6LE0658-WL



(SMALL)

CODE: BO-A6LE1258-WL



(MEDIUM)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-A6LE0658-WL-K40-A-C-6005#-L40

BO-A6LE0658-WL-
K40-A-C-
6005#-L40

1. CHOOSE FIXTURE SIZE:

BO-A6LE0658-WL SMALL

BO-A6LE1258-WL MEDIUM

2. CHOOSE CCT

-K30 3000K

-K35 3500K


-K40 4000K

-K50 5000K

-CUS* Custom on request


3. WATER PROOF SOLUTIONS: (included)

-A-C

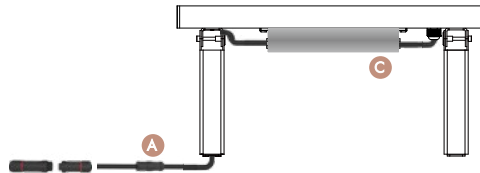

4. WATER PROOF SOLUTIONS: (optional)

-B

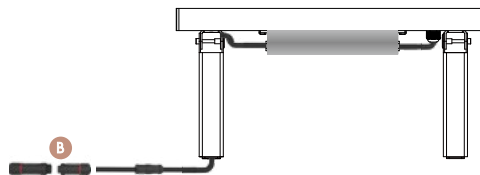

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

SENTO MAX COLLECTION

CODE: BO-A6LE0658-WL



(SMALL)

CODE: BO-A6LE1258-WL



(MEDIUM)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-A6LE0658-WL-K40-A-C-6005#-L40

BO-A6LE0658-WL-
K40-A-C-
6005#-L40


5. ANTI GLARE LOUVER (Optional)

-6005#



6. EXTERNAL BRACKET (Optional)

-L40



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA