


CODE: BO-D1BE2817-WL




SMALL (S)

CODE: BO-D1BD5407-WL



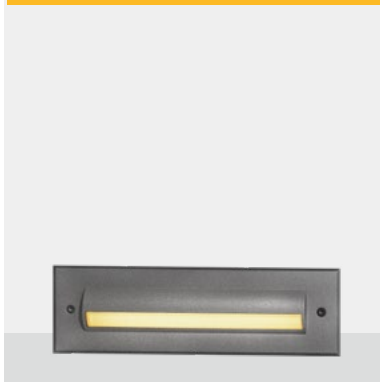


MEDIUM (M)

CODE: BO-D1DA3034-WL

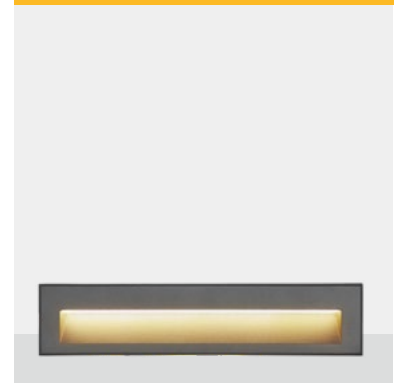

LARGE (L)



LIGHT SOURCE:

28 × 0.15W

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

29 mA

CONSUMPTION:

5.7W

LUMINANCE:

CW=82 | WW=65

IK:

09

LIGHT SOURCE:

54 × 0.07W

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

30 mA

CONSUMPTION:

6.1W

LUMINANCE:

CW=226 | WW=200

IK:

09

LIGHT SOURCE:

30 × 0.3W

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

51 mA

CONSUMPTION:

6.1W

LUMINANCE:

WW=400

IK:

10

LIGHTING INFORMATION

FRONT COVER	BO-D1BD5407-WL: Stainless Steel 316L#
	BO-D1BE2817-WL, BO-D1DA3034-WL: 12# Die-casting aluminum
HOUSING	12# Die-casting RAL9005 powder coated aluminum T=60-80µm.
	Adhesion of ISO class 1/ASTM class 4B
LIGHT WINDOW	BO-D1BE2817-WL, BO-D1BD5407-WL: UVstop & Fireproof PC
	BO-D1DA3034-WL: Glass T=1.8mm
CABLE GLAND	BO-D1BE2817-WL, BO-D1BD5407-WL: IP68 PG-9 PA66
	BO-D1DA3034-WL: IP67 copper and nicked coated
GASKET	Molding Shaped silicone seal
RECESSED SLEEVE	BO-D1BE2817-WL, BO-D1BD5407-WL: PC/ABS ALLOYS 074#
	BO-D1DA3034-WL: PC/ABS ALLOYS 107#
LED DRIVER	Constant Voltage Input, Constant Current Output
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire
	H05RN-F 3×1.0mm², L=0.5m(110V-277V)
IP	IP65
DIMMING SUPPORT	Triac PWM Available, 1-10V, Dali, Customized

REGULAR PAINTING COLOR

Basic



Dark Grey
KAP 7037

Secondary




Silver Grey
KAP 9022



Sanded Black
RAL 9005

RECESSED SLEEVE (Included)


-074#



-107#




BO-D1DA3034-WL

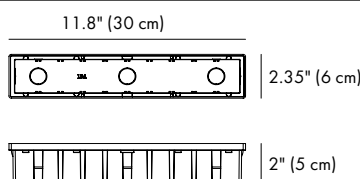

MOUNTING SLEEVE CHARACTERISTIC



• High voltage Type



- The above picture – the supporting plate "A1" and "A2" are used for preventing deformation of the sleeve during the construction installation process.
- Please remove the supporting plate "A1" and "A2" from the mounting sleeve before the lamp installation.

sales@gordonbullard.com
www.bullardoutdoor.com



991 South Gull Lake Dr
Richland, MI 49083
USA

1-877-964-4646


BEAM DEMO

BO-D1BE2817-WL



DIAGRAM OF INSTRUCTION

BO-D1DA3034-WL

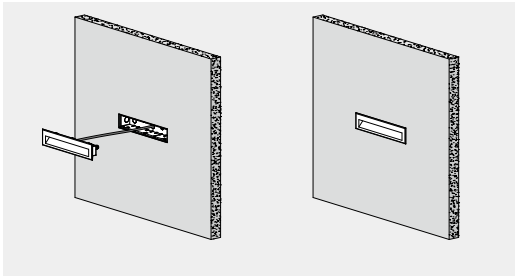

FEATURES





BO-D1DA3034-WL

- Front cover without screws



- Use the high-strength clips for installation and fixation. (please refer remark ① & ②)



PHOTOMETRIC

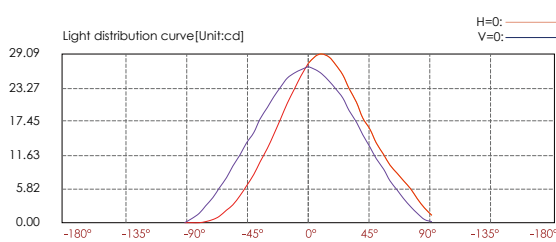

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	6.76 LUX	5.30m	5.10m
4m	1.69 LUX	10.5m	10.3m
6m	0.75 LUX	15.8m	15.4m
8m	0.42 LUX	21.1m	20.5m
10m	0.27 LUX	26.4m	25.7m
12m	0.19 LUX	31.6m	30.8m



Ver.Spread:105.7 Horiz.Spread:104.2

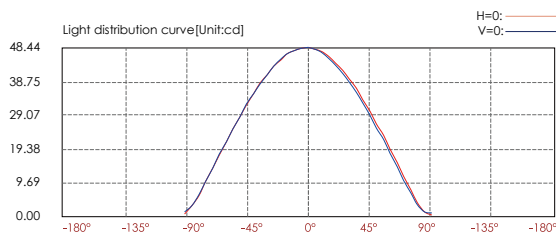

Lux distance cure

Illuminance at a distance			
Center beam LUX	Beam width V	Beam width H	
2m	12.08 LUX	5.60m	5.50m
4m	3.02 LUX	11.3m	11.0m
6m	1.34 LUX	16.9m	16.5m
8m	0.76 LUX	22.6m	22.0m
10m	0.48 LUX	28.2m	27.5m
12m	0.34 LUX	33.9m	33.0m

Ver.Spread:109.4 Horiz.Spread:107.9

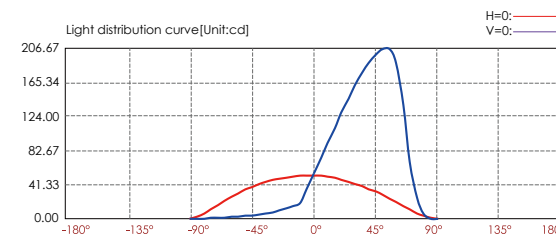

Lux distance cure

Illuminance at a Distance			
Center Beam LUX	Beam Width V	Beam Width H	
2m	13.16 LUX	4.4m	2.1m
4m	3.29 LUX	8.8m	4.1m
6m	1.46 LUX	13.3m	6.2m
8m	0.82 LUX	17.7m	8.3m
10m	0.53 LUX	22.1m	10.3m
12m	0.37 LUX	26.5m	12.4m

Ver.Spread:95.8 Horiz.Spread:54.7

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

SKYRAY COLLECTION

CODE: BO-D1BD5407-WL




SMALL (S)

CODE: BO-D1BD5407-WL



MEDIUM (M)

CODE: BO-D1DA3034-WL

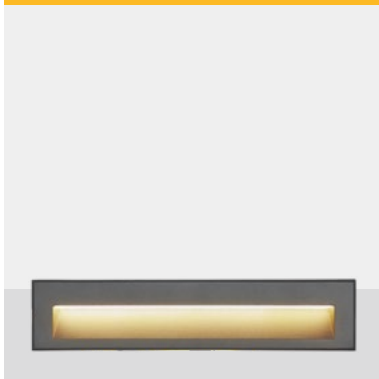

LARGE (M)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D1BE2817-WL-BKAP7037-K40-074#-107#

BO-D1BE2817-
WL-BKAP 7037-
K40-074#-107#

1. CHOOSE FIXTURE SIZE:

BO-D1BE2817-WL	Small
BO-D1BD5407-WL	Medium
BO-D1DA3034-WL	Large

2. BODY FINISH OPTIONS:

-BKAP 7037		Dark Grey
-RAL 9023		Silver Grey
-RAL 9005		Sanded Black

3. CHOOSE CCT

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

4. RECESSED SLEEVE (Included)

-074#



-107#



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA