




## SMALL (S)



## LIGHT SOURCE:

1×8W

LENS:

B71

SELECTED DEGREE:

24°

**INPUT VOLTAGE:** 

110-277V

**OPERATION CURRENT:** 

45 mA

CONSUMPTION:


10 W

LUMINANCE:

792 lm



### MEDIUM (M)



## LIGHT SOURCE:

4×4W

LENS:

FR11R4

SELECTED DEGREE:

20°

INPUT VOLTAGE:

110-277V

**OPERATION CURRENT:** 

78 mA

CONSUMPTION:

17.4 W

LUMINANCE:

1227 lm







HOUSING 12# Die-casting aluminium finishing or powder painting

 $T=60-80\mu m. Adhesion of ISO class 1/ASTM class 4B$ 

LIGHT WINDOW Tempered glass.T=3mm

LED **NICHIA** 

90 CRI

CCT  $3000\mbox{K}\,/\,3500\mbox{K}\,/\,4000\mbox{K}\,/\,5000\mbox{K}\,/\,\mbox{Custom}$  on request

**LED DRIVER** Constant Voltage Input, Constant Current Output

IP68 PG-9 PA66 CABLE GLAND

**GASKET** Tooling shaped seal

**POWER CABLE** Outside of luminaire

110-277V: H05RN-F 3×1.0mm<sup>2</sup>, L=2.0m

#### **FINISH OPTIONS** Basic Secondary Sanded Black Dark Grey KAP 7037 Silver Grev KAP 9022 **RAL 9005 OPTICS** Referenced Degree(°) $\theta$ 1/2 B71 15° 339 45° 60° 24° FB11B4 20° 30° 45° 60°

### **ACCESSORIES**

#### **SPIKE**

#### STAINLESS STEEL





12A BO-B3DVB0127-SP BO-B3DWB0460-SP







ľD Fitted <u>Item</u> BO-B3DVB0127-SP BO-B3DWB0460-SP 18A



### TREE POLE STRAP











### ADJUSTABLE BEAM DIRECTION

Approximately



## WATER PROOF SOLUTION





### Water-Stopper (Included)

A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.

IP67 Jiffy quick plug/socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.


sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646 C



991 South Gull Lake Dr Richland, MI 49083



## **PHOTOMETRIC**

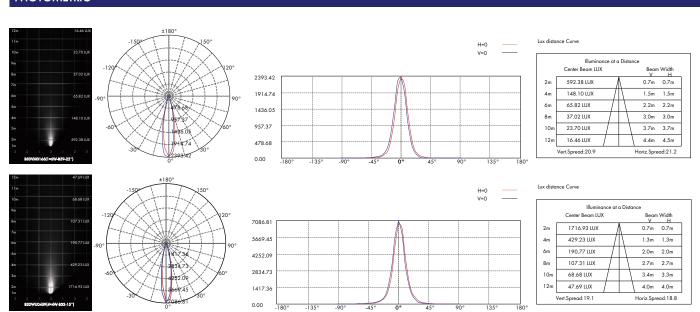




**HOW TO ORDER:** 

CODE:

## CODE: BO-B3DVB0127-SP



SMALL (S)

### **EXAMPLE:**

BO-B3DVB0127-SP-KAP7037-12A-A-B

BO-B3DVB0127-SP

## 1. CHOOSE FIXTURE SIZE:

BO-B3DVB0127-SP SMALL
BO-B3DWB0460-SP MEDIUM

# 2. BODY FINISH OPTIONS:

-KAP 7037 Dark Grey

-KAP 9022 Silver Grey

-RAL 9005 Sanded Black

## CODE: BO-B3DVB0127-SP



MEDIUM (M)

## 3.CHOOSE CCT

**K30 -** 3000K

**K35** - 3500K

**K40 -** 4000K

**K50 -** 5000K

CUS\* - Custom on request

# 4. TREE POLE STRAP: (optional)

-RD003







BO-B3DVB0127-SP

SMALL (S)

BO-B3DVB0127-SP

MEDIUM (M)

CODE:

CODE:

# TERRI COLLECTION

## **HOW TO ORDER:**

## CODE:

### **EXAMPLE:**

BO-B3DVB0127-SP-KAP7037-12A-A-B

BO-B3DVB0127-SP

## 5. SPIKE: (optional)

### STAINLESS STEEL:




### PC/ABS alloys:



# 6. WATER PROOF SOLUTION (included):

### -A Water-Stopper (Included)


A IP-66 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.



# 7. WATER PROOF SOLUTION (optional):

### \_B IP67 Jiffy quick plug/socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



sales@gordonbullard.com www.bullardoutdoor.com 1-877-964-4646



991 South Gull Lake Dr Richland, MI 49083