

ITEM	HEIGHT	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BO-D9EDL2434 -B	30cm(11.81")	24x0.2W NICHIA	110-277V	50	6.5	264.5	07
BO-D9EDM2434 -B	55cm(21.65")						
BO-D9EDH2434-B	80cm(31.49")						

**HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12# Die-casting powder coated aluminum.

**LIGHT WINDOW** PMMA

**LED** SMD3030

**LED DRIVER** Constant Voltage Input, Constant Current Output

**OPERATING TEMPERATURE** -20°C~40°C

**POWER CABLE** Outside of luminaire  
110-277V: H05RN-F 3x1.0mm<sup>2</sup>, L=0.5m

**BASE** Flange base

**DIMMING SUPPORT** Triac PWM Available  
1-10V Dali Customized

### Modular Light Source and Power with IP-66



GrigYa '6c"Uxg8YgI b  
 bYVWub[ YUVY@ \k-YUXgVta dujVYk jh'HY'Z'ck bI 'a cXYg  
 !H-95GD9B % !H-9FCK 5B %




### REGULAR PAINTING COLOR

**Basic** Sanded Black RAL 9005


**Secondary** Dark Grey KAP 7037

Light Sanded Grey RAL 7038

### INSTALLATION BASE

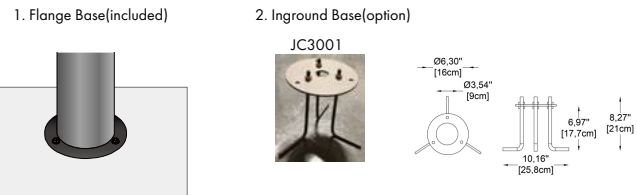

### PHOTOMETRIC

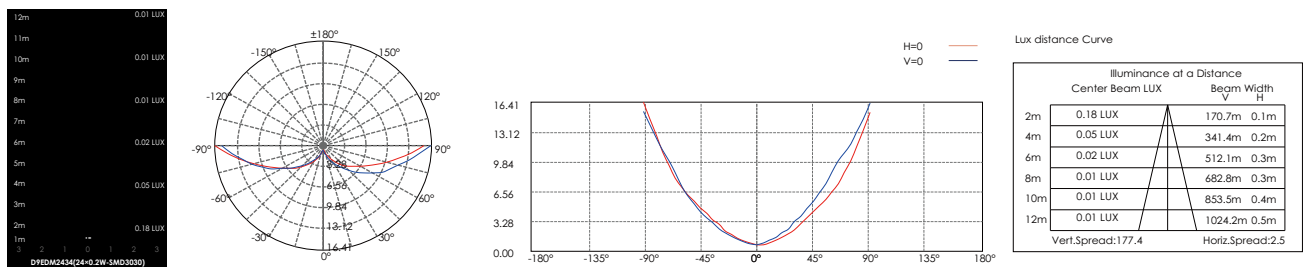

sales@gordonbullard.com  
 www.bullardbollards.com  
 1-877-964-4646



991 South Gull Lake Dr  
 Richland, MI 49083  
 USA