

ITEM	HEIGHT	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BO-D9AFL2434-B	30cm(11.81")	24x0.5W OSRAM	110-277V	60	14	337	N/A
BO-D9AFM2434-B	55cm(21.65")						
BO-D9AFH2434-B	80cm(31.49")						

**HOUSING** T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#  
Die-casting powder coated aluminum.

**LIGHT WINDOW** PMMA

**LED** SMD2835

**LED DRIVER** Constant Voltage Input, Constant Current Output


**OPERATING TEMPERATURE** -20°C~40°C

**POWER CABLE** Outside of luminaire  
110-277V; H05RN-F 3x1.0mm<sup>2</sup>, L=0.5m

**BASE** Flange Base

**DIMMING SUPPORT** Triac PWM Available  
1-10V Dali Customized

### BEAM DEMO

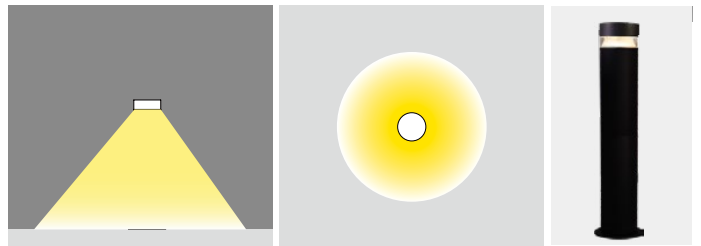

### REGULAR PAINTING COLOR

**Basic**  
Sanded Black **RAL 9005**


**Secondary**  
Dark Grey **KAP 7037**

Light Sanded Grey **RAL 7038**

### INSTALLATION BASE



### PHOTOMETRIC

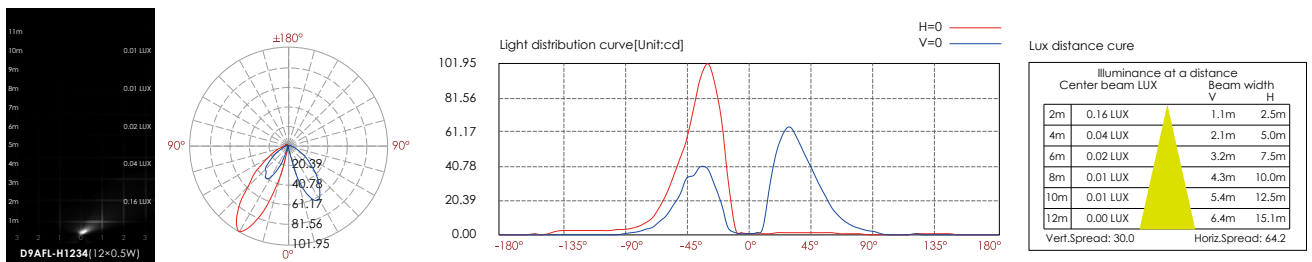

sales@gordonbullarda.com  
www.bullardbollards.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA