


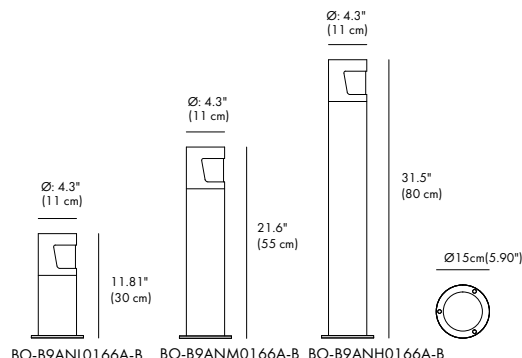

CODE	HEIGHT(cm)	LIGHT SOURCE	INPUT VOLTAGE(V)	OPERATING CURRENT(MA)	CONSUMPTION(W)	LUMINANCE(LM)	IK
BO-B9ANL0166A-B	11.8" (30 cm)	84×0.1W OSRAM	110-277V	77	7.3	CW-130 WW-150	06
BO-B9ANM0166A-B	21.6" (55 cm)						
BO-B9ANH0166A-B	31.5" (80 cm)						

HOUSING

T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12#
Die-casting powder coated aluminum.

LIGHT WINDOW

PMMA

LED

SMD4040

CCT

3000K / 3500K / 4000K / 5000K / Custom on request

CRI

90

LED DRIVER

Constant Voltage Input, Constant Current Output

OPERATING TEMPERATURE

-20°C~40°C

POWER CABLE

Outside of luminaire

110-277V: H05RN-F 3×1.0mm², L=0.5m


BASE

Flange base

DIMMING SUPPORT

Triac PWM, 1-10V, Dali, Customized

Modular Light Source and Power with IP-66

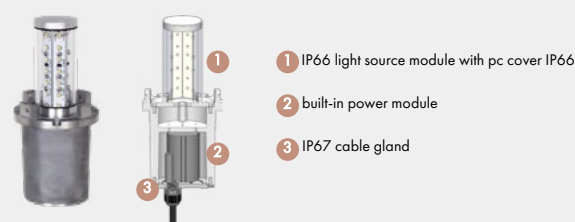

FINISH OPTIONS

Basic

Sanded Black
RAL 9005


Secondary

Dark Grey
KAP 7037

Light Sanded Grey
RAL 7038


INSTALLATION BASE

1. Flange Base (included)





2. Inground Base (option)

JC3001



PHOTOMETRIC

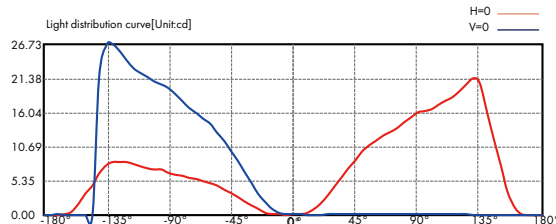

Lux distance curve

Distance (m)	Beam Width (m)	Illuminance (lux)
2m	7.1m	0.03 LUX
4m	14.1m	0.01 LUX
6m	21.2m	0.00 LUX
8m	28.2m	0.00 LUX
10m	35.3m	0.00 LUX
12m	42.3m	0.00 LUX

Vert. Spread: 120.9° Horiz. Spread: 73.3°

THE LINDEN 1

HOW TO ORDER:

CODE:

EXAMPLE:

BO-D9AKL4234A-K30-PWM-KAP 7037

BO-D9AKL4234A-B

1. CHOOSE FIXTURE SIZE:

BO-D9AKL4234A-B SMALL

BO-D9AKM4234A-B MEDIUM

BO-D9AKH4234A-B LARGE

2. CHOOSE CCT

K30 - 3000K

K35 - 3500K

K40 - 4000K

K50 - 5000K

CUS* - Custom on request

3. DIMMING OPTIONS:

PWM - Triac PWM

DIM - 1-10V

DALI - DALI

CUS* - Custom on request

4. FINISH OPTIONS:


-KAP 7037 Dark Grey

-KAP 9022 Silver Grey

-RAL 9005 Sanded Black

5. INSTALLATION BASE (Optional)

JC3001



CODE: BO-B9ANL0166A -B



(SMALL)

CODE: BO-D9AKM4234A -B



(MEDIUM)

CODE: BO-D9AKH4234A-B



(LARGE)

sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA