



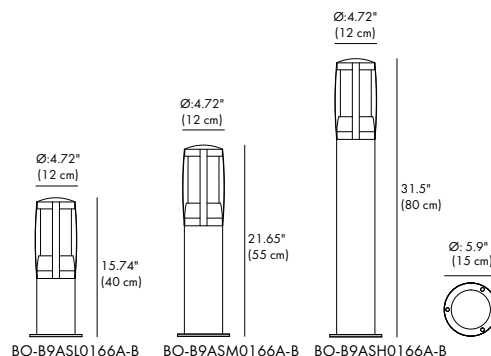

CODE	HEIGHT	LIGHT SOURCE	INPUT VOLTAGE (V)	OPERATING CURRENT (MA)	CONSUMPTION (W)	LUMINANCE (LM)	IK
BO-B9ASL0166A-B	15.75" (40 cm)	1×6W NICHIA	110-277V	76	7.3	156	05
BO-B9ASM0166A-B	21.65" (55 cm)						
BO-B9ASH0166A-B	31.5" (80 cm)						

HOUSING	T=60-80µm Adhesion of ISO class 1/ASTM class 4B 12# Die-casting powder coated aluminum.
LIGHT WINDOW	PMMA
LED	SMD2835
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
LED DRIVER	Constant Voltage Input, Constant Current Output
OPERATING TEMPERATURE	-20°C~40°C
POWER CABLE	Outside of luminaire: 110-277V: H05RN-F 3×1.0mm², L=0.5m
BASE	Flange base
DIMMING SUPPORT	Triac PWM, 1-10V, Dali, Customized

Modular Light Source and Power with IP-66


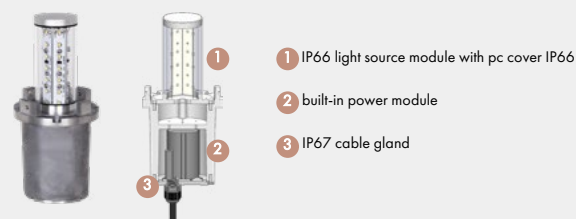


FINISH OPTIONS




Basic	Secondary	
 Sanded Black RAL 9005	 Dark Grey KAP 7037	 Light Sanded Grey RAL 7038

INSTALLATION BASE

1. Flange Base (included)
2. Inground Base (option)



PHOTOMETRIC

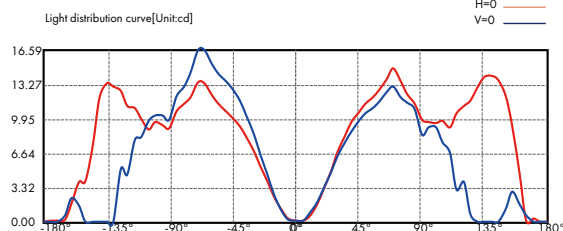

THE PINO 1

HOW TO ORDER:

CODE:

CODE: BO-B9ASL0166A -B

EXAMPLE:

BO-B9ASL0166A-K30-PWM-KAP 7037

BO-B9ASL0166A-B

1.CHOOSE FIXTURE SIZE:

BO-B9ASL0166A-B	SMALL
BO-B9ASM0166A-B	MEDIUM
BO-B9ASH0166A-B	LARGE

2.CHOOSE CCT

K30 -	3000K
K35 -	3500K
K40 -	4000K
K50 -	5000K
CUS* -	Custom on request

3.DIMMING OPTIONS:


PWM -	Triac PWM
DIM -	1-10V
DALI -	DALI
CUS* -	Custom on request

4.FINISH OPTIONS:


	-KAP 7037	Dark Grey
	-KAP 9022	Silver Grey
	-RAL 9005	Sanded Black

5.INSTALLATION BASE (Optional)

JC3001



(SMALL)

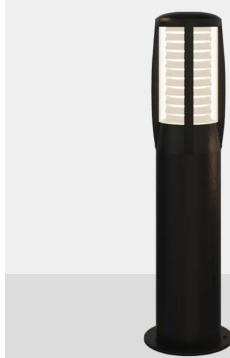

(MEDIUM)



(LARGE)