



CODE: BO-C2H0457-IN



4.92" (12.5cm)



2.93"
(7.6 cm)

LIGHT SOURCE:

4 × 1.5W

SELECTED DEGREE: (°)

80°×60°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

33 mA

CONSUMPTION:

7W

LUMINANCE:

491 lm

IK:

09

OPTICS

Referenced Degree(°)



C18

80°×60°

HOUSING

12# Die-casting aluminum dark grey powder coated. T=60-80μm.

FRONT RING

Hard chromeplated Stainless steel SUS 316L#

CABLE GLAND

Tempered frosted step glass.T=8mm

GLASS PRESSURE CAPACITY

IP67 copper an d nicked coated

LED

Full area=2,578kgs

PCB

NICHIA SMD3535

LED DRIVER

Excellent heat conductivity aluminum, coefficient of heat Conductivity≥2.0w/mk

CCT

3000K / 3500K / 4000K / 5000K / Custom on request

CRI

90

OPERATING TEMPERATURE

Constant Voltage Input, Constant Current Output -20°C~40°C

POWER CABLE

Outside of luminaire : 110-277V: H05RN-F 3×1.0mm², L=0.5m

RECESSED SLEEVE MATERIAL

PC/ABS ALLOYS

DIMMING SUPPORT

Triac PWM, 1-10V,Dali ,Customized

IP

IP67

OPERATING TEMPERATURE

-20°C~40°C


WATER PROOF SOLUTION




A IP67 Jiffy quick plug/ socket connector (Option)

A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



SLEEVE (Included)

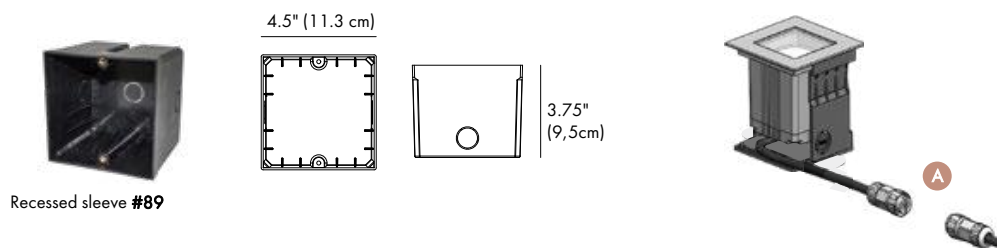

BEAM DEMO

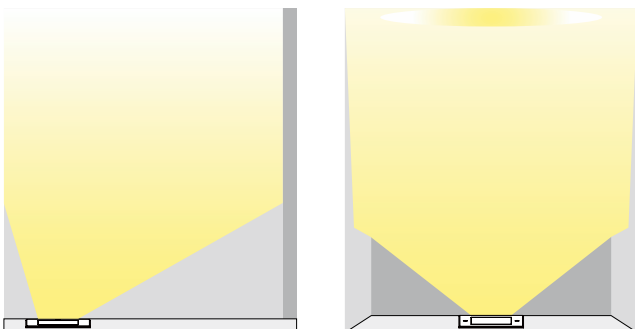

PHOTOMETRIC

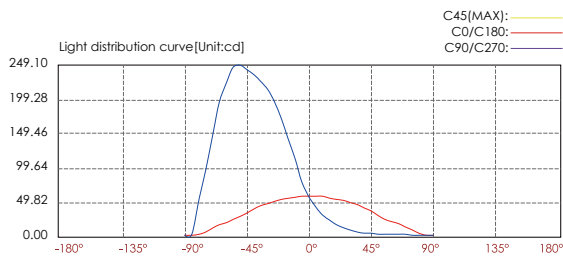

Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX	V	H	
2m	14.33 LUX	3.4m	2.3m
4m	3.58 LUX	6.9m	4.6m
6m	1.59 LUX	10.3m	6.9m
8m	0.90 LUX	13.7m	9.2m
10m	0.57 LUX	17.1m	11.6m
12m	0.40 LUX	20.6m	13.9m
Ver.Spread:81.3		Horiz.Spread:60.1	

sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

HOW TO ORDER:

CODE:

CODE: BO-C2H0457-IN

EXAMPLE:

BO-C2H0457-IN-K30-DIM-A

BO-C2H0457-IN-
K30-DIM-A

1.CHOOSE FIXTURE MODEL:

BO-RC2CPR0125-IN

2.CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3.DIMMING OPTIONS:

-PWM	Triac PWM
-DIM	1-10V
-DALI	DALI
-CUS*	Custom on request

4.WATER PROOF SOLUTION (optional):

- A **IP67 Jiffy quick plug/socket connector (Option)**
A IP-67 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

