
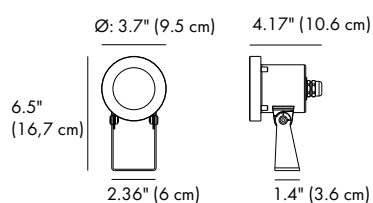


CODE: BO-B5XA0681-UL

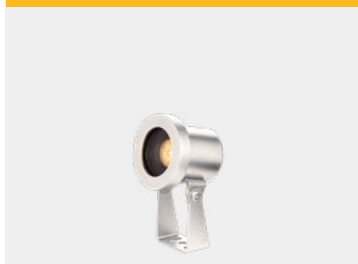

LIGHT SOURCE:

6 × 1.5W

LENS / SELECTED DEGREE:

B71 / 24°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

416 mA

CONSUMPTION:

10W


LUMINANCE:

800 lm

IK:

08

CODE: BO-B5YA0365-UL

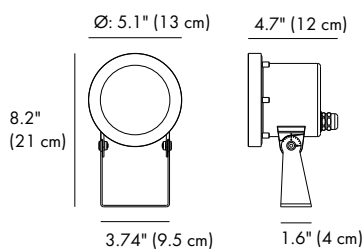

LIGHT SOURCE:

3 × 5.5W

LENS / SELECTED DEGREE:

B33 / 24° (20°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

830 mA

CONSUMPTION:

20W


LUMINANCE:

1428 lm

IK:

08

CODE: BO-B5ZA0665-UL

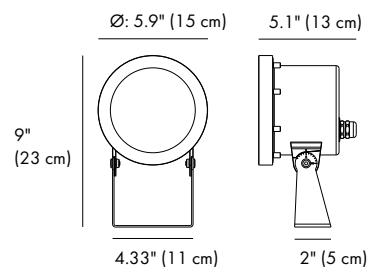

LIGHT SOURCE:

6 × 4.5W

LENS / SELECTED DEGREE:

B33 / 24° (20°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

1350 mA

CONSUMPTION:

30W

LUMINANCE:

2581 lm

IK:


08

WATER PROOF SOLUTION



- A Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP68 Jiffy quick plug/socket connector(Optional)**
A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

CODE: BO-B5DA1259-UL

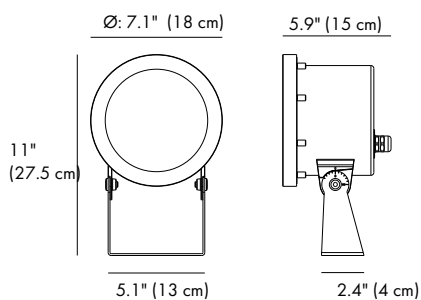

LIGHT SOURCE:

12 × 3.5W

LENS / SELECTED DEGREE:

B33 / 24°(20°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

1850 mA

CONSUMPTION:

45W


LUMINANCE:

3872 lm

IK:

08

CODE: BO-B5UA1265-UL

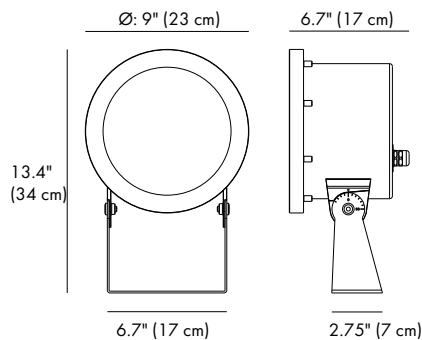

LIGHT SOURCE:

12 × 5W

LENS / SELECTED DEGREE:

B33 / 24°(20°)

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

2860 mA

CONSUMPTION:

68.5W

LUMINANCE:

5562 lm

IK:

08

OPTICS

Referenced Degree(°)θ1/2

	B71	15°	24°	33°	45°	60°
	B33	9°	15°	20°	45°	60°

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

FRONT COVER & HOUSING	Hard chromeplated molding shaped stainless steel SUS 316#
LIGHT WINDOW	PMMA 8mm
GASKET	Silicone gasket
LED	Nichia
CABLE GLAND	IP68 PG-11 copper with nickel-coated
PCB	Excellent heat conductivity aluminum.coefficient of heatConductivity≥2.0w/mk
CCT	3000K / 3500K / 4000K / 5000K / Custom on request
CRI	90
LED DRIVER	Constant Voltage Input,Constant Current Output
POWER CABLE OPTIONAL	Outside of luminaire : H07RN-F 2×1.0mm ² with water-stopper, L=1m, 3m, 5m
BUILT-IN OVERHEAT SENSOR SYSTEM	Automatic Shutdown at 75°C
OPERATING TEMPERATURE DIMMING	Temperature of water between -20°C~40°C less than 1 meter depth.
SUPPORT	Triac PWM, 1-10V,Dali ,Customized

ACCESSORIES


TRIPOD



I'D	Fitted Item
5001	BO-B5XA0681-UL
5002	BO-B5YA03650-UL
5003	BO-B5ZA0665-UL BO-B5DA1259-UL BO-B5UA12650-UL



ADJUSTABLE BEAM DIRECTION

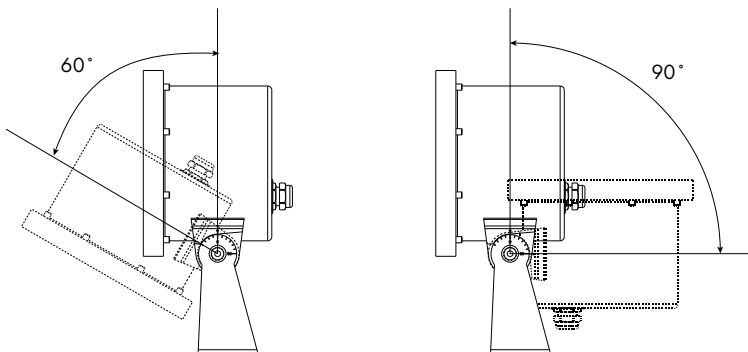

OVERVIEW



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646






991 South Gull Lake Dr

Richland, MI 49083

USA




PHOTOMETRIC

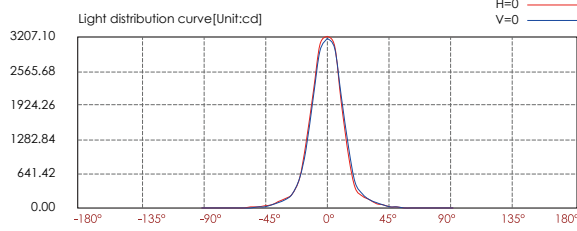

Lux distance cure

Center beam LUX	Beam width V	H
2m 801.78 LUX	0.9m	0.9m
4m 200.44 LUX	1.8m	1.8m
6m 89.09 LUX	2.7m	2.7m
8m 50.11 LUX	3.6m	3.6m
10m 32.07 LUX	4.5m	4.5m
12m 22.27 LUX	5.3m	5.3m




Ver.Spread: 25.0 Horiz.Spread: 25.1

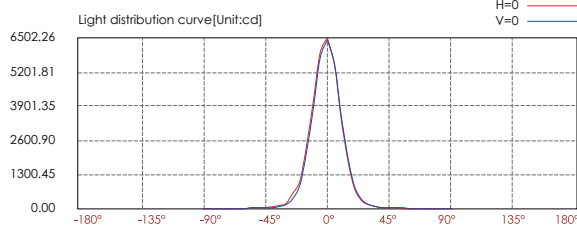

Lux distance cure

Center beam LUX	Beam width V	H
2m 1625.56 LUX	0.8m	0.8m
4m 406.39 LUX	1.6m	1.6m
6m 180.42 LUX	2.5m	2.4m
8m 101.60 LUX	3.3m	3.2m
10m 65.02 LUX	4.1m	4.0m
12m 45.15 LUX	4.9m	4.9m




Ver.Spread: 23.2 Horiz.Spread: 22.9

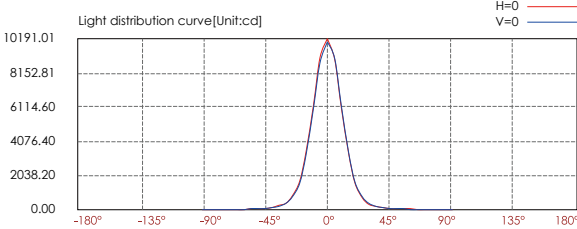

Lux distance cure

Center beam LUX	Beam width V	H
2m 2547.75 LUX	0.9m	0.9m
4m 636.94 LUX	1.7m	1.7m
6m 283.08 LUX	2.6m	2.6m
8m 159.23 LUX	3.5m	3.4m
10m 101.91 LUX	4.3m	4.3m
12m 70.77 LUX	5.2m	5.1m




Ver.Spread: 24.4 Horiz.Spread: 24.2

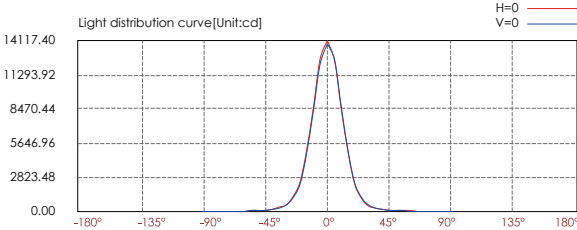

Lux distance cure

Center beam LUX	Beam width V	H
2m 3529.35 LUX	0.9m	0.9m
4m 882.34 LUX	1.7m	1.7m
6m 392.15 LUX	2.6m	2.6m
8m 220.58 LUX	3.5m	3.4m
10m 141.17 LUX	4.3m	4.3m
12m 98.04 LUX	5.2m	5.1m

Ver.Spread: 24.1 Horiz.Spread: 24.1

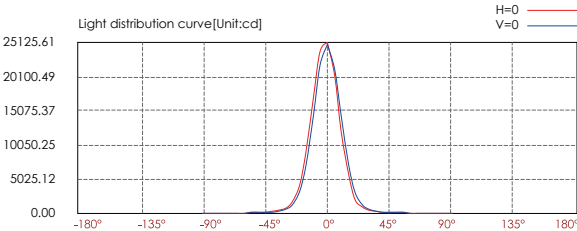

Lux distance cure

Center beam LUX	Beam width V	H
2m 6281.40 LUX	0.8m	0.8m
4m 1570.35 LUX	1.6m	1.6m
6m 697.93 LUX	2.4m	2.4m
8m 392.59 LUX	3.2m	3.2m
10m 251.26 LUX	4.0m	4.0m
12m 174.48 LUX	4.8m	4.8m

Ver.Spread: 22.8 Horiz.Spread: 22.8

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

CODE: BO-B5XA0681-UL



(Small)

CODE: BO-B5YA0365-UL



(Medium)

CODE: BO-B5ZA0665-UL



(Large)

CODE: BO-B5DA1259-UL



(Extra Large)

CODE: BO-B5UA1265-UL



(Double Extra Large)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-B5XA0681-UL-K30-DIM-A-B

1. CHOOSE FIXTURE MODEL:

BO-B5XA0681-UL	Small
BO-B5YA0365-UL	Medium
BO-B5ZA0665-UL	Large
BO-B5DA1259-UL	Extra Large
BO-B5UA1265-UL	Double Extra Large

2. CHOOSE CCT:

-K30	3000K
-K35	3500K
-K40	4000K
-K50	5000K
-CUS*	Custom on request

3. DIMMING OPTIONS:

-PWM	Triac PWM
-DIM	1-10V
-DALI	DALI
-CUS*	Custom on request

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

CODE: BO-B5XA0681-UL



(Small)

CODE: BO-B5YA0365-UL



(Medium)

CODE: BO-B5ZA0665-UL



(Large)

CODE: BO-B5DA1259-UL



(Extra Large)

CODE: BO-B5UA1265-UL



(Double Extra Large)

HOW TO ORDER:

CODE:

EXAMPLE:

BO-B5XA0681-UL-K30-DIM-A-B-5001

BO-B5XA0681-UL-
K30-DIM-A-B-5001

4.WATER PROOF SOLUTION (included):

- A **Water-Stopper (Included)**
IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.



5.WATER PROOF SOLUTION (optional):

- B **IP68 Jiffy quick plug/socket connector (Option)**
A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.



6.TRIPOD

- 5001  BO-B5XA0681-UL
- 5002  BO-B5YA0365-UL
- 5003  BO-B5ZA0665-UL
BO-B5DA1259-UL
BO-B5UA1265-UL

