

CODE:

BO-2ED7KBC0657-WL

LIGHT SOURCE:

6 × 2W

SELECTED DEGREE:

87°×75°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

49 mA

CONSUMPTION:


6W

LUMINANCE:

776 lm

IK:

01

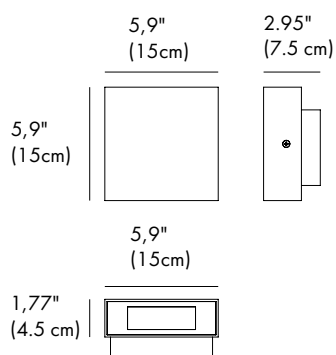

CODE:

BO-2ED7CBC0657-WL

LIGHT SOURCE:

6 × 2W

SELECTED DEGREE:

87°×75°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

49 mA

CONSUMPTION:



6W

LUMINANCE:

738 lm

IK:

01

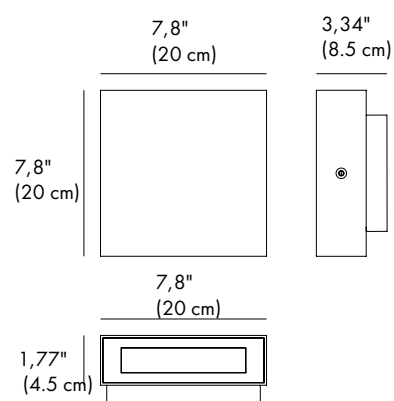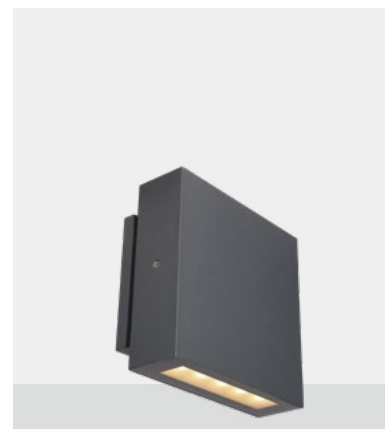

CODE:

BO-2ED7DBC1057-WL

LIGHT SOURCE:

10 × 1.5W

SELECTED DEGREE:

93°×75°

INPUT VOLTAGE:

110-277V

OPERATING CURRENT:

85 mA

CONSUMPTION:

9.2W

LUMINANCE:

1192 lm

IK:

01



sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

LIGHTING INFORMATION

HOUSING	12# Die-casting aluminum finishing or powder painting T=60-80μm. Adhesion of ISO class 1/ASTM class 4B
Glass	T=3mm
GASKET	Tooling shaped seal
LED	OSRAM
DRIVER	Driver inside builded
OPERATING TEMPERATURE	-20°C-40°C
POWER CABLE	Outside of luminaire 110-277V: H05RN-F 3×1.0mm², L=0.3m
DIMMING SUPPORT	Triac PWM Available 1-10V Dali Customized

REGULAR PAINTING COLOR


Basic	Secondary
 Dark Grey KAP 7037	 Silver Grey KAP 9022
	 Sanded Black RAL 9005

OPTICS


Referenced Degree(°) $\theta_{1/2}$

		9°	15°	20°	30°	45°	60°
 FB11B4							
 FB12B5							

DIAGRAM OF INSTRUCTION

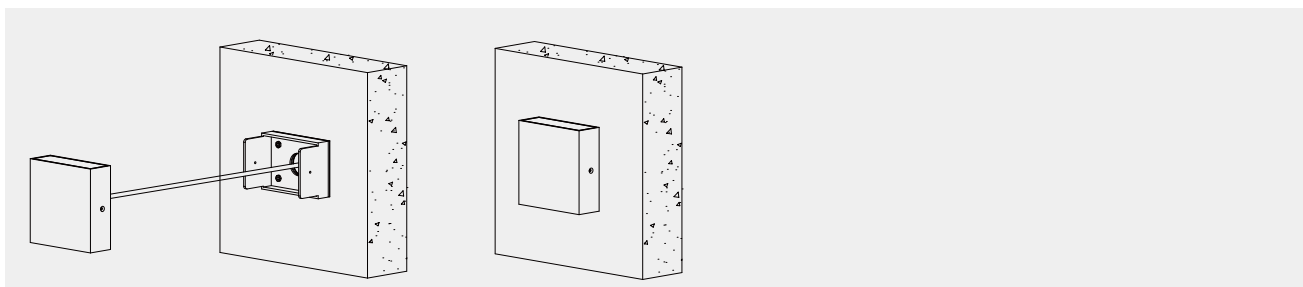

BEAM DEMO

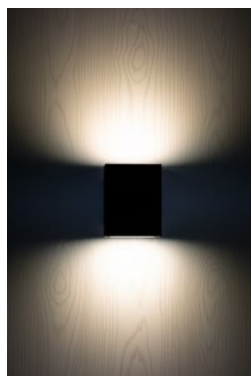

BB-2ED7KBC0657-WL



BB-2ED7CBC0657-WL



BB-2ED7DBC1057-WL



sales@gordonbullarda.com

www.bullardoutdoor.com

1-877-964-4646






991 South Gull Lake Dr

Richland, MI 49083

USA




PHOTOMETRIC

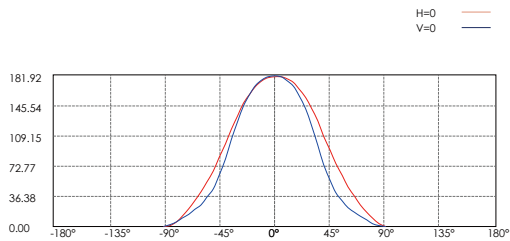

Lux distance Curve

Distance (m)	Center Beam LUX	Beam Width (V)	Beam Width (H)
2m	44.96 LUX	3.8m	3.1m
4m	11.24 LUX	7.7m	6.1m
6m	5.00 LUX	11.5m	9.2m
8m	2.81 LUX	15.3m	12.3m
10m	1.80 LUX	19.2m	15.4m
12m	1.25 LUX	23.0m	18.4m




Vert.Spread:87.6 Horiz.Spread:75.1

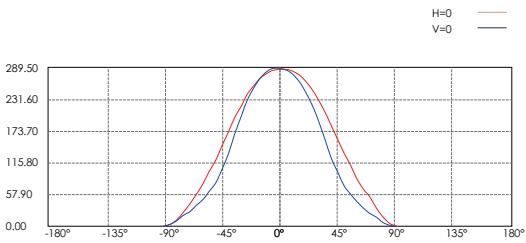

Lux distance Curve

Distance (m)	Center Beam LUX	Beam Width (V)	Beam Width (H)
2m	71.70 LUX	4.2m	3.1m
4m	17.92 LUX	8.4m	6.2m
6m	7.97 LUX	12.6m	9.2m
8m	4.48 LUX	16.9m	12.3m
10m	2.87 LUX	21.1m	15.4m
12m	1.99 LUX	25.3m	18.5m

Vert.Spread:93.0 Horiz.Spread:75.3

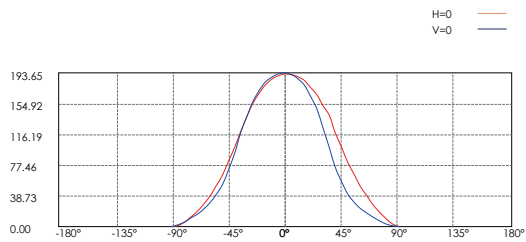

Lux distance Curve

Distance (m)	Center Beam LUX	Beam Width (V)	Beam Width (H)
2m	47.97 LUX	3.8m	3.1m
4m	11.99 LUX	7.6m	6.1m
6m	5.33 LUX	11.3m	9.2m
8m	3.00 LUX	15.1m	12.3m
10m	1.92 LUX	18.9m	15.3m
12m	1.33 LUX	22.7m	18.4m

Vert.Spread:86.8 Horiz.Spread:75.0



sales@gordonbullarda.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA