



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The Arlux bollard from Bullard Outdoor features a classic, durable design ideal for gardens, parks, pathways, and villa landscapes. Constructed with high-quality aluminum and low-iron glass, it ensures corrosion and compression resistance, paired with an IP65 protection rating for outdoor resilience. This 31.5" (80 cm) tall, 3.54" (9 cm) diameter bollard uses a 10W LED light source with a 120° beam angle, available in multiple color temperatures (2700K–5000K) to suit various settings, and offers a CRI of 80 or 90 for color accuracy.

FIXTURE TYPE:

Bollard

LIGHTING

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

Aluminum + PMMA

IP:

IP 65

IP65

BEAM ANGLE:

120°

LED

110-277V

IP65



BUILT FOR THE STORM

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646




991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

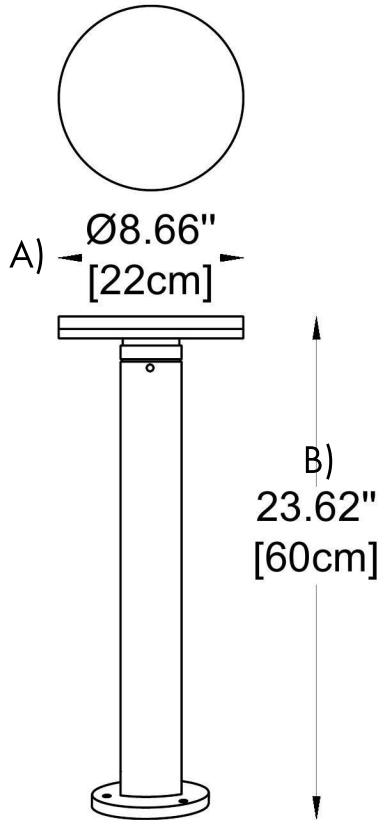

LED



IP65



HOW TO ORDER:

CODE:

Example:
CODE: BO-1801-BL-K30-C80-DIM-CUS

BO-1801-BL-K30-
C80-DIM-CUS

1

DIMENSIONS:

A) Diameter - Ø: 8.66" (22 cm)
B) Height - H: 23.62" (60 cm)

2

LIGHT SOURCE:

LED / 10W / 85 lm/W

3

SPECIFY CCT:

-K27	2700K
-K30	3000K
-K40	4000K
-K50	5000K

4

CRI:

-C80	CRI 80
-C90	CRI 90

5

DIMMING OPTIONS:

-NON	Non-Dimmable
-DIM	1-10V
-DMX	DMX512
-RDM	RDM

7

FINISH OPTIONS:

-WH	White
-BL	Black
-CUS	Custom on request*

BUILT FOR THE STORM

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA